

Project:

Quantity:

Item #:

**BK****RESOURCES**

# Drop-In Hot Food Well

## DESCRIPTION

Unlike traditional steam tables or dry wells, waterless hot food wells from BK Resources feature radiant Halo Heat® technology that evenly surrounds food without the use of extremely hot elements, added humidity or fans. Extend hold times, maintain food quality and reduce operating costs to maximize return on investment.



## STANDARD FEATURES

- Extend food holding times with efficient, precise Halo Heat® technology
- Maintain food quality without the use of extremely hot elements, added humidity or fans
- Increase sales with attractive food presentation and quality
- Reduce installation and operating costs with no water or plumbing needed
- Save on maintenance costs, eliminating lime and scale buildup associated with traditional steam tables
- Increase employee and customer safety with elimination of hot water and steam
- Provide optimal holding temperatures with an adjustable thermostat that can be flush-mounted into the counter or a location out of sight from customers
- Set ideal holding temperatures for any dish with an individual well control option
- E-H41-4, E-H41-6, models include eight (8) half/third-size divider bars and three (3) large pan divider bars

## Configurations (select one)

☐ E-H41-4

☐ E-H41-6

## Electrical

☐ 120V

☐ 208-240V

☐ 230V

## CAPACITY

- Four full-size of GN 1/1 pans
- Eight half-size or GN 1/2 pans
- Twelve third-size or GN 1/3 pans
- E-H41-4: 96 lb (44kg) product maximum
- E-H41-4: 58 qt (56L) volume maximum



IP X3



© BK Resources August 2026




120 Frontage Road, Altamont, IL 62411


Phone: 888-310-4393 Fax: 618-483-9898 Fax: 888-310-4394 [www.bk-resources.com](http://www.bk-resources.com)




## Specifications

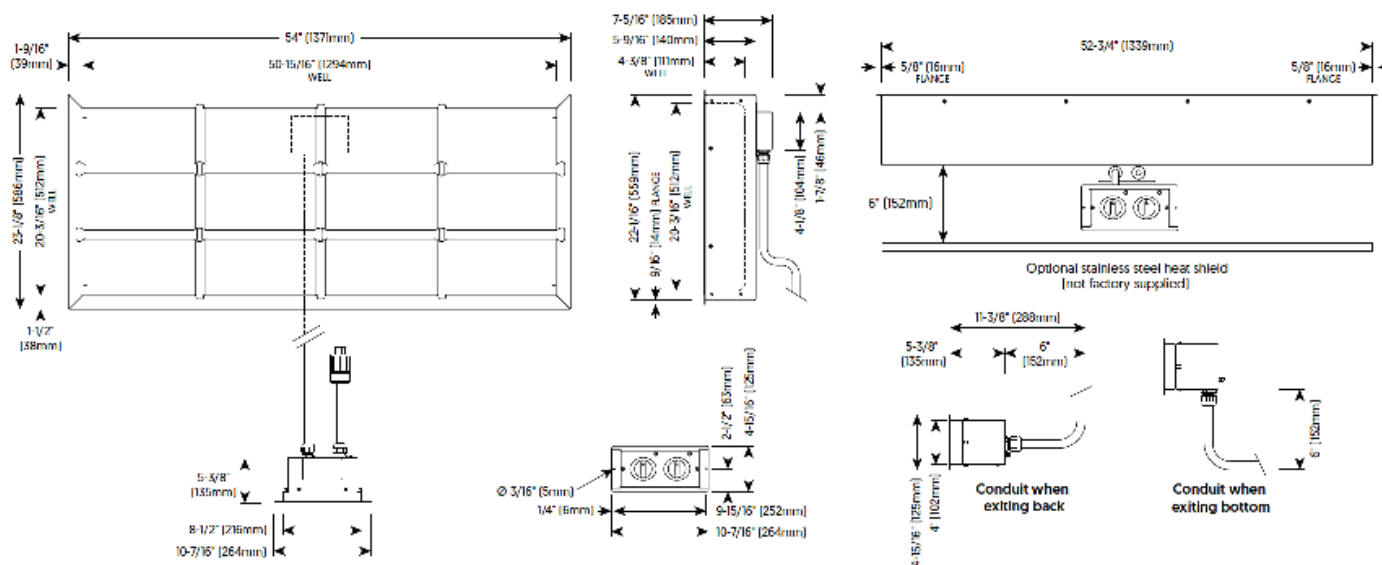


## Specifications

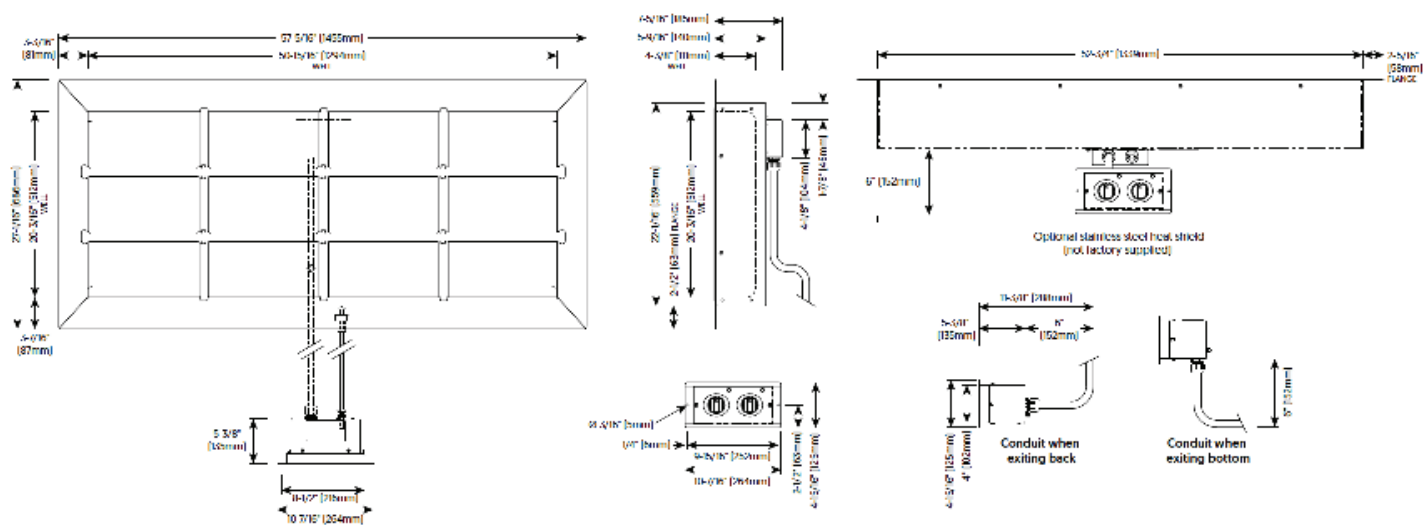

## Specifications

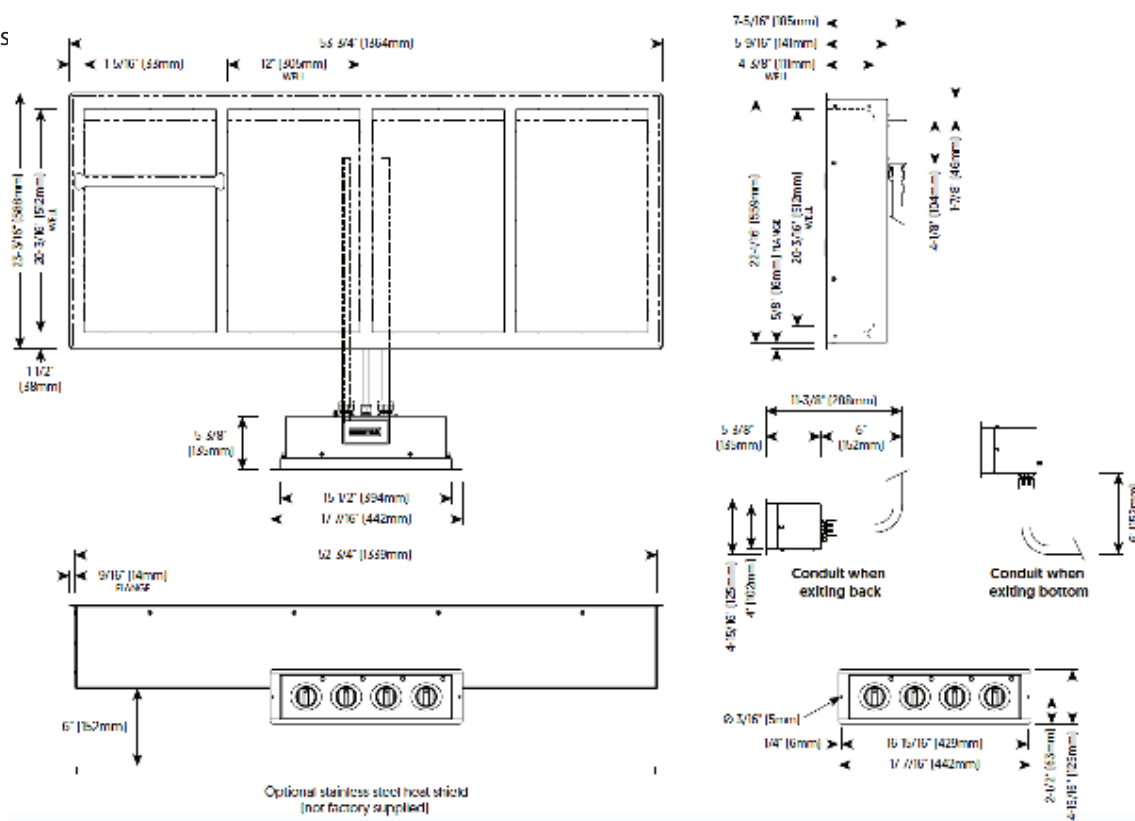

## Specificatio

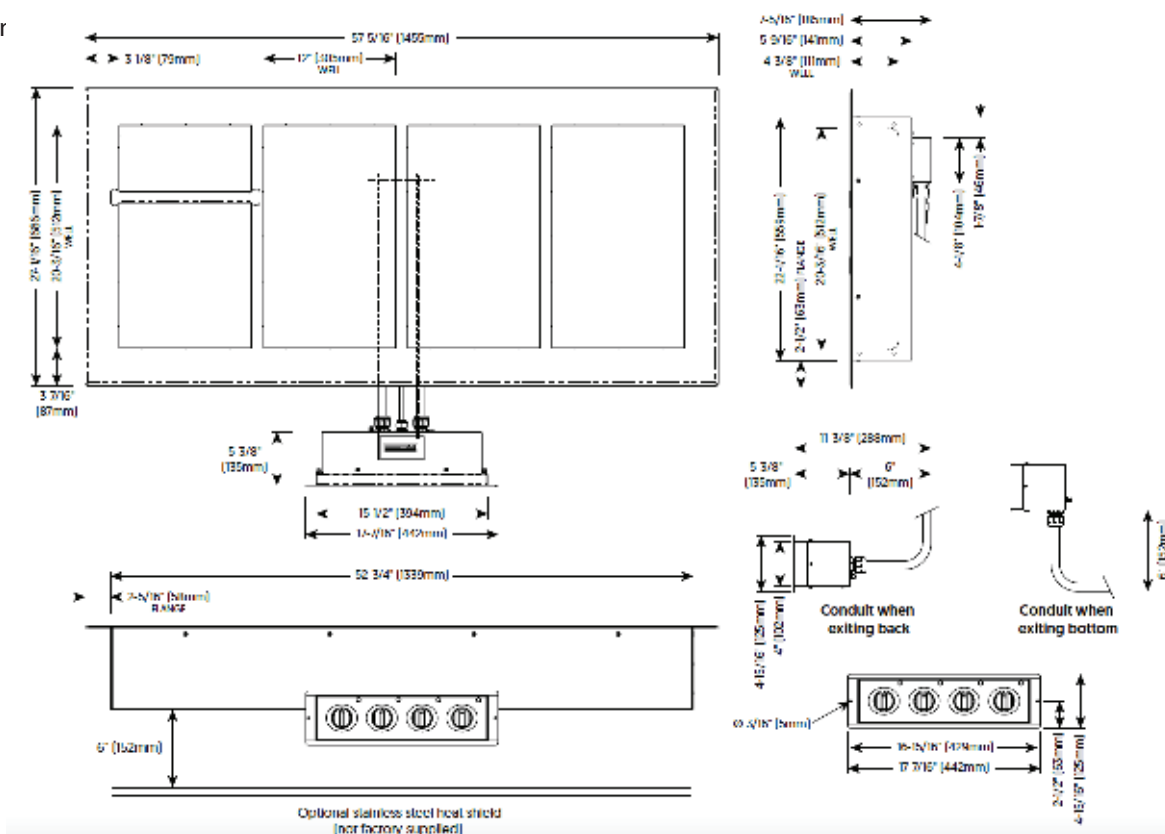

# Drop-In Hot Food Well

## DIMENSIONS

| Model   | Exterior (HxWxD)                                 | Interior (HxWxD)                                    |
|---------|--------------------------------------------------|-----------------------------------------------------|
| E-H41-4 | 7-5/16" x 54" x 23-1/8" (185mm x 1371mm x 586mm) | 4-3/8" x 37-7/8" x 20-3/16" (111mm x 962mm x 512mm) |
| E-H41-6 | 9-5/16" x 54" x 23-1/8" (235mm x 1371mm x 586mm) | 6-3/8" x 37-7/8" x 20-3/16" (162mm x 962mm x 512mm) |

## CUTOUT DIMENSIONS

| Model   | Non-combustible Surface Cutout (LxW) | Combustible Surface Cutout (LxW) | Control Box Cutout (HxWxD)                        |
|---------|--------------------------------------|----------------------------------|---------------------------------------------------|
| E-H41-4 | 52-15/16" x 22-1/8" (1345mm x 562mm) | --                               | 4-1/4" x 8-3/4" x 11-3/8" (108mm x 122mm x 288mm) |
| E-H41-6 | 52-15/16" x 22-1/8" (1345mm x 562mm) | --                               | 4-1/4" x 8-3/4" x 11-3/8" (108mm x 122mm x 288mm) |

^Large flange wells only.

\*Allow 6" (152mm) clearance from control box to conduit bend.

| Model   | Net Weight  | Ship Weight** | Ship Dimensions (LxWxH)**                |
|---------|-------------|---------------|------------------------------------------|
| E-H41-4 | 71lb (25kg) | 125lb (58kg)  | 60" x 34" x 15" (1524mm x 864mm x 381mm) |
| E-H41-6 | 79lb (28kg) | 166lb (73kg)  | 60" x 34" x 15" (1524mm x 864mm x 381mm) |

\*\*Domestic ground shipping information. Contact factory for export weight and dimensions.

## CHECK FIRST

- Appliance must be installed level and must not be installed in any area where it may be directly affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.
- Some foods may require additional overhead heating. Always monitor the food temperature and add overhead heating when needed.
- Countertop material must withstand temperatures up to 200°F (93°C).
- A stainless steel heat shield is recommended if the area under the appliance is used for storage.

## HEAT

## CLEARANCE

### Heat of Rejection

| E-H41 | Heat Gain<br>qs.<br>kw | Heat Gain<br>qs.<br>kw |                                     |
|-------|------------------------|------------------------|-------------------------------------|
|       | 243                    | 0.07                   | 1" (25mm) from combustible surfaces |

| Model              | V        | Ph  | Hz | A     | kW   | Cord & Plug |                                                                                                    |                                                                                                                                                                                                                                                                      |
|--------------------|----------|-----|----|-------|------|-------------|----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| E-H41-4<br>E-H41-6 | 120V     | 120 | 1  | 50/60 | 20.0 | 2.4         | NEMA 5-15p<br>15A-125V plug                                                                        |                                                                                                                                                                                  |
|                    | 208-240V | 208 | 1  | 50/60 | 8.7  | 1.8         | NEMA 6-15p                                                                                         |                                                                                                                                                                                  |
|                    |          | 240 |    | 50/60 | 10.0 | 2.4         | 15A-250V plug<br>(U.S.A. only)                                                                     |                                                                                                                                                                                                                                                                      |
|                    | 230V     | 230 | 1  | 50/60 | 10.4 | 2.4         | CEE 7/7<br>plug rated 250V<br>CH2-16p<br>plug rated 250V<br>BS 1363 (U.K. only)<br>plug rated 250V | <br><br> |

Cord length: 120V: 6ft (1.8 m); 208-240V: 9ft (2.7m); 230V (CEE): 9ft (2.7m); 230V (CH, BS): 8ft (2.5m)