

Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
ACP-3G C CI 230V 1N 50Hz

19089824

23/01/2024

DENOMINATION:

Refrigerated counter - Advance 700 Gastronorm with 3 doors.

DESCRIPTION :

- Structure built with AISI-304 stainless steel
 - 50 mm, 40 kg/m³ injected polyurethane insulation.
 - Forced draught cooling system inside the room.
 - Copper piping and aluminium flaps evaporator.
 - Digital display for electronic and digital control of temperature and defrosting.
 - The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.
 - Easier loading and unloading thanks to its door self-closing and stay open features.
 - Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).
 - Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.
 - Built-in drainage to get rid of waste liquids inside the unit.
 - Interior LED lighting (only for models with glass doors).
 - Embedded bottom and curved panels inside for easy cleaning and maintenance.
 - Height adjustable stainless steel legs.
 - 10 cm high splashback.
 - Working temperature: from 0 °C to +8 °C (refrigerators) and from -18 °C to -22 °C (freezers).
 - Tested in climatic class IV.
- Refrigerated counters.

POSSIBLE OPTIONS :

- Stainless Backing
- Legs instead of castors
- Door frame resistance
- Glass door
- Granite worktop
- Drawers [1/2] unit
- Locks
- Left group
- Without breastplate
- Without Countertop
- Panoramic aperture
- Remote group
- Drawers [1/3] unit
- Drawers [1/3 + 2/3] unit


STANDARD OPTIONS :

- HACCP alarm
- Castors
- UK plug

POSSIBLE ACCESSORIES :

- REFRIGERATION
- ACCESSORIES
- ACCESSORIES FOR REFRIGERATION
- GASTRONORM GRIDS

DIMENSIONS



X Width	1790 mm	X Gross width	1910 mm
Y Depth	700 mm	Y Gross depth	825 mm
Z Height	850 mm	Z Gross height	1000 mm
Net Weight	132,0 kg	Gross Weight	139,0 kg
Net volume	1,071 m ³	Gross volume	1,576 m ³

ELECTRICITY TECHNICAL SPECIFICATIONS

Amperage (A)	0,93A
Electric frequency	50Hz
Electric power	0,152 kW
Voltage	230V - 1N

GAS TECHNICAL SPECIFICATIONS

Gas type	R-600a
----------	--------

COLD TECHNICAL SPECIFICATIONS

Annual elec. consumption	514,00 kWh
Clasif. Energy efficiency	A
Climate class	4
Cooling gas load	103,000 g
Energy Efficiency Index	20,95 %
Gross internal volume	403 L
Model Type	Counter Cabinet
Power consumption 24h	1,41 kWh
Refrigeration net.vol	261 L
Refrigeration power	0,361 kW


CONNECTIONS TECHNICAL SPECIFICATIONS

Single-phase 230V wiring	2X1+T-2A
--------------------------	----------

OTHERS

Condensation system	Vent.
Number of doors	3



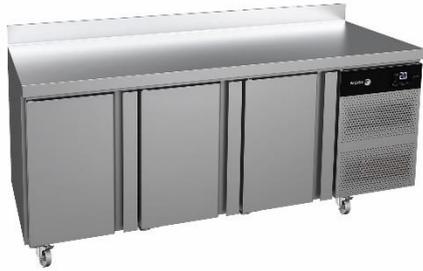

Catalogue
FOOD SERVICE
Chapter
REFRIGERATION


Specific model
ACP-3G C CI 230V 1N 50Hz

19089824

23/01/2024

SUPPLIED ACCESSORIES:

- 12035781 GN 1/1 grid in epoxy (530x325) 3
- 12036880 Advance table grill guide - wall and central - 519 mm - 1 piece 12

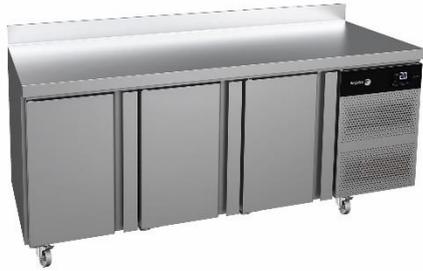

Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
ACP-3G 230V C CI 1N 50Hz

19089824

23/01/2024

