

# GAS PASTA COOKER 2 BASINS 40 LT MANUAL

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0993429

MODELLO  
D94/10CPGM

SERIE  
DIAMANTE90



## GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200. Wide range of accessories.

## TECHNICAL SPECIFICATIONS

Moulded tubs with rounded corners, made of AISI 316 stainless steel for maximum corrosion resistance.

Water filling available by means of solenoid valve with the possibility of fast or slow loading or by means of a mechanical tap located on the control panel. Stainless steel water outlet integrated in the expansion zone, and floor drain.

Safety pressure switch to prevent activation of heating without water in the tank.

Gas version: Heating via stainless steel burner positioned outside the tank. Safety gas valve with thermocouple and electric ignition.

Electric version: Heating by means of an AISI 304 steel armoured heating element located in the tank and rotatable by 90° for easy cleaning.

Safety pressure switch to prevent activation of heating without water in the tank.

Water dispenser located at the front of the tank.

Large expansion zone with overflow drain for draining excess starch during cooking.

Fully mechanical gas versions without the need for electrical connections. Water filling can be activated via a tap located on the control panel.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

# GAS PASTA COOKER 2 BASINS 40 LT MANUAL

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0993429

MODELLO  
D94/10CPGM

SERIE  
DIAMANTE90

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR0993429
DEFINITION	D94/10 CPGM FULL GAS COOKER M80 40+40L
COMMERCIAL LINE	DIAMANTE
SUPPLY	GAS
NET WEIGHT	116,000 Kg
PACKAGE LENGTH	860,000 mm
PACKAGE WIDTH	1020,000 mm
PACKAGING HEIGHT	1150,000 mm
PACKAGE VOLUME	1,010 m3
GROSS PACKING WEIGHT	126,000 Kg
GAS POWER	28,00
GAS POWER (G25.3/25mbar)	26,00
CERTIFIED MODEL	D94/10 CPGM

# GAS PASTA COOKER 2 BASINS 40 LT MANUAL

Project: .....  
 Rev: .....  
 Zone: .....  
 Location: .....


CODICE  
CR0993429

MODELLO  
D94/10CPGM

SERIE  
DIAMANTE90

## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm  
 MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

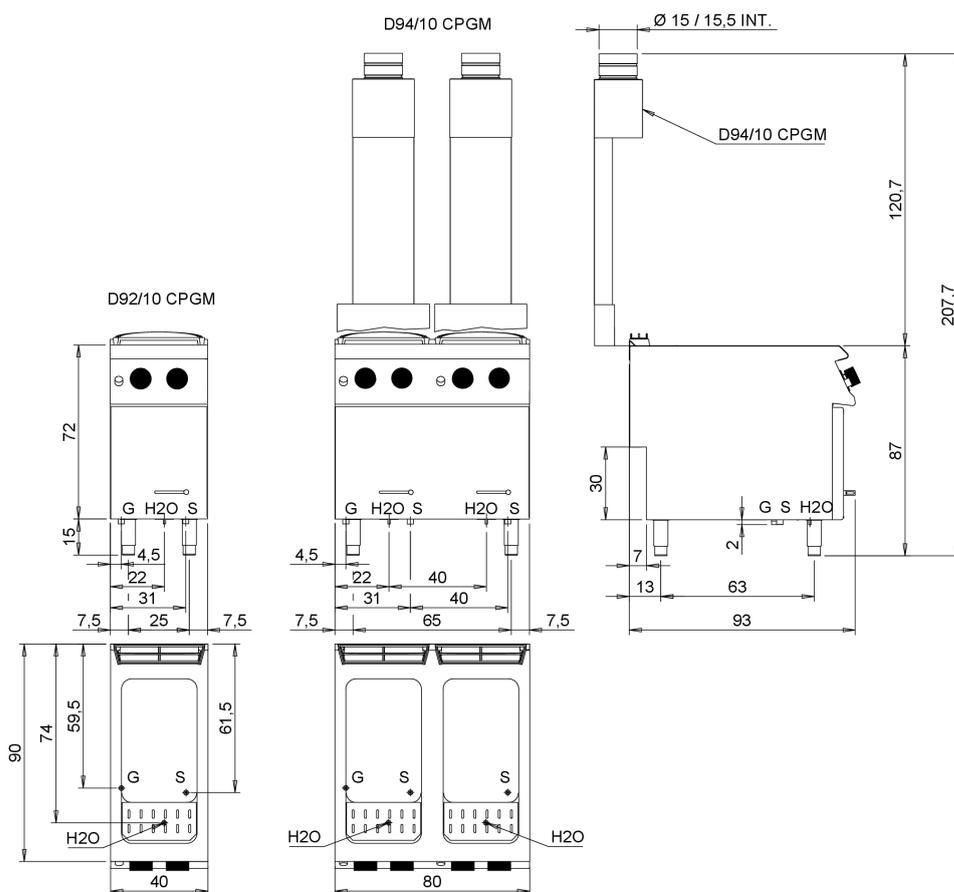

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda	
<b>E</b>	Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico
<b>S</b>	Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água EN 10226-1 R1
<b>S1</b>	Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba
<b>S2</b>	Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão
<b>S3</b>	Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto
<b>G</b>	Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
<b>H2O</b>	Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água
<b>A1</b>	Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno
<b>A2</b>	Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
	Ø=1 cm
<b>L</b>	Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nivel

# GAS PASTA COOKER 2 BASINS 40 LT MANUAL

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0993429

MODELLO  
D94/10CPGM

SERIE  
DIAMANTE90

## Product's PLUS



Fully mechanical gas versions without the need for electrical connections. Water filling can be activated via a tap located on the control panel.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



Safety pressure switch to prevent activation of heating without water in the tank.



Water dispenser located at the front of the tank.



Large expansion zone with overflow drain for draining excess starch during cooking.

# GAS PASTA COOKER 2 BASINS 40 LT MANUAL

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0993429

MODELLO  
D94/10CPGM

SERIE  
DIAMANTE90

## ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR0999079	CCP12	BASKET GN1/2 SIDE HANDLE
CR0999089	CCP13L	BASKET GN1/3 SIDE HANDLE
CR0999099	CCP13F	BASKET GN1/3 FRONT HANDLE
CR0999109	CCP16D	BASKET GN1/6 RIGHT-HAND HANDLE
CR0999119	CCP16S	BASKET GN1/6 LEFT HANDLE
CR0999129	CCP19	BASKET GN1/9 FRONT HANDLE
CR0999149	GFCP40	
CR0999169	CVCP40	
CR0999179	9KIT-A	
CR0999189	9KIT-B	
CR0999199	9KIT-C	
CR0789930	9KIT-D	
CR0592799	ZF8	
CR0592830	ZG	
CR0592820	9ZL	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	
CR0592940	9CAT *	Water column for top equipment