

MINI-STOVE TOP WITH TWO BURNERS ON THE LEFT

Project:
Rev.:
Zone:
Location:



CODICE
CR0995509

MODELLO
D94/10TCTGSX

SERIE
DIAMANTE90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200. Wide range of accessories.

TECHNICAL SPECIFICATIONS

Cast iron centre plate and ring.
Steel burner controlled by thermocouple safety valve.
Piezoelectric ignition with liquid-protected push button.
Adjustable temperature on the plate from 50° to 450°C.
Thermocouple safety valves with pilot flame.

Thick top plate with removable centre ring.

A single high-efficiency central burner that results in differentiated heat zones on the floor with a concentration of maximum heat in the centre and decreasing temperatures in the peripheral zones.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

MINI-STOVE TOP WITH TWO BURNERS ON THE LEFT

Project:
Rev:
Zone:
Location:



CODICE
CR0995509

MODELLO
D94/10TCTGSX

SERIE
DIAMANTE90

Technical Information

| SPECIFICATION | DATA |
|--------------------------|-------------------------------------|
| MATERIAL | CR0995509 |
| DEFINITION | D94/10 TCTGSX ALLPLATE.G.2 F SX TOP |
| COMMERCIAL LINE | DIAMANTE |
| SUPPLY | GAS |
| DIM. WIDTH | 800 mm |
| DIM. PRODUCTIVITY | 900 mm |
| DIM. HEIGHT | 250 mm |
| NET WEIGHT | 69,000 Kg |
| VOLUME (net) | 0,180 |
| PACKAGE LENGTH | 850,000 mm |
| PACKAGE WIDTH | 1020,000 mm |
| PACKAGING HEIGHT | 570,000 mm |
| PACKAGE VOLUME | 0,494 m3 |
| GROSS PACKING WEIGHT | 80,000 Kg |
| GAS POWER | 17,50 |
| GAS POWER (G25.3/25mbar) | 15,50 |
| GAS/REFRIGERANT TYPE | GPL 28-30/37 mbar |
| CERTIFIED MODEL | D94/10 TCTGSX |

MINI-STOVE TOP WITH TWO BURNERS ON THE LEFT

Project:
 Rev:
 Zone:
 Location:


CODICE
CR0995509

MODELLO
D94/10TCTGSX

SERIE
DIAMANTE90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
 MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

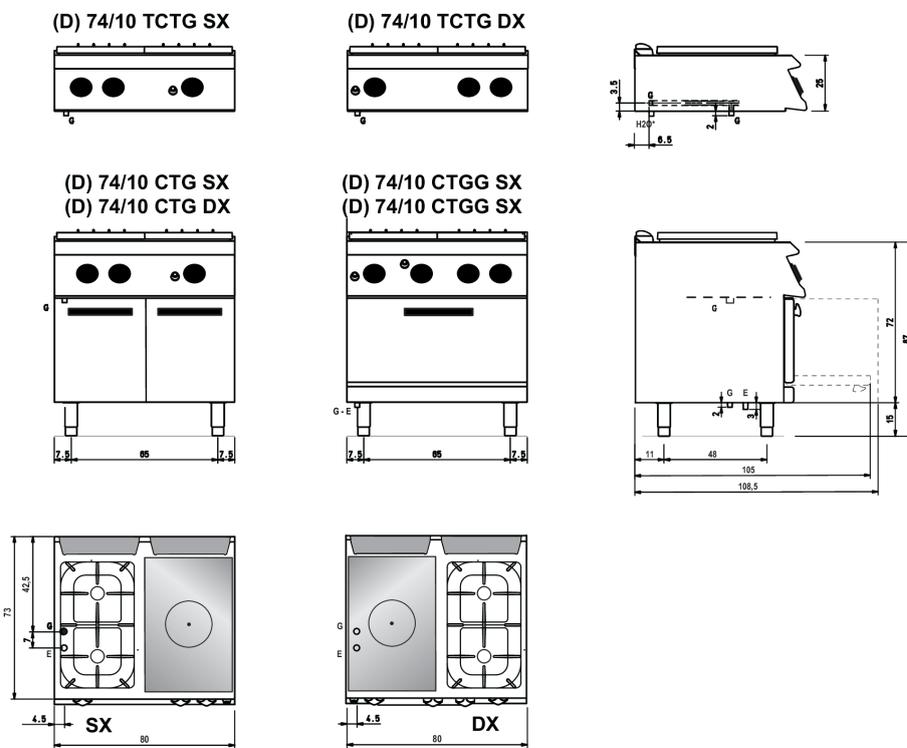

Legenda - Legende - Key - Légende - Leyenda - Legenda

G Attacco arrivo gas - Gasanschluss - Gas connection
 Arrivée gaz - Union de gas - Gasaansluiting
EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)

H2O* Attacco arrivo acqua - Wasseranschluss - Water inlet
 Arrivée eau - Union de agua - Wateraansluiting
EN ISO 228-1 G 3/4

MINI-STOVE TOP WITH TWO BURNERS ON THE LEFT

Project:
Rev:
Zone:
Location:




CODICE
CR0995509

MODELLO
D94/10TCTGSX

SERIE
DIAMANTE90

Product's PLUS

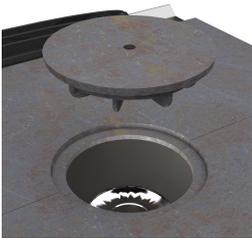

Thick top plate with removable centre ring.



A single high-efficiency central burner that results in differentiated heat zones on the floor with a concentration of maximum heat in the centre and decreasing temperatures in the peripheral zones.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

MINI-STOVE TOP WITH TWO BURNERS ON THE LEFT

Project:
Rev:
Zone:
Location:



CODICE
CR0995509

MODELLO
D94/10TCTGSX

SERIE
DIAMANTE90

ACCESSORIES

| CODE | MODELLO | DESCRIZIONE |
|------------|----------|---|
| CR1355469 | D94/10B | Open base 80cm series 90 |
| CR0996979 | DBVP4 | |
| CR0997009 | DBVPA4 | |
| CR0997029 | DAPC | |
| CR0997019 | DAPD | |
| CR0997039 | DAPS | |
| CR0997049 | DAPM | |
| CR0997059 | DAPDB | |
| CR1353589 | DBVC4 | |
| CR0592679 | 94/10 BH | Open base - hygienic finish H2 80cm series 90 |
| CR1353569 | DRG21 | |
| CR0592799 | ZF8 | |
| CR0592830 | ZG | |
| CR0592820 | 9ZL | |
| MA97432000 | R | |
| MA97433000 | RI | |
| CR0592869 | PZM | |
| CR0593580 | 9PT | |
| CR0592879 | KPA | |
| CR0592940 | 9CAT * | Water column for top equipment |