



RESOURCES

Expanding Stem Casters

1-5/8" Stem Work Table Caster with Polyolefin Wheel

Certifications:



Features:


- Fits Standard 1-5/8" Tubing by Expanding Creating a Secure Fit
- Double Ball Bearing Raceway for Long Wear and Added Strength
- With or Without Top Lock Brake
- Raceway Dust Cover

Material:

- Injection Molded Polyolefin
- Temperature Range -45° to 180°F
- Highly Resistant to Chemicals and Solvents
- Zinc Plated
- Polyolefin Wheel



Part Number	Brake	Exposed Height	Wheel Size	Capacity
3SBR-RA-LDP	-	4.125"	3"	300 LBS
3SBR-RA-LDP-TLB	TLB	4.125"	3"	300 LBS
4SBR-RA-LDP	-	5"	4"	300 LBS
4SBR-RA-LDP-TLB	TLB	5"	4"	300 LBS
5SBR-RA-LDP	-	6"	5"	300 LBS
5SBR-RA-LDP-TLB	TLB	6"	5"	300 LBS
5SBR-RA-LDP-PS4	TLB	6"	(4)Pack 5" Polyolefin Wheel	300 LBS
5SBR-RA-LDP-PS6	TLB	6"	(6)Pack 5" Polyolefin Wheel	300 LBS

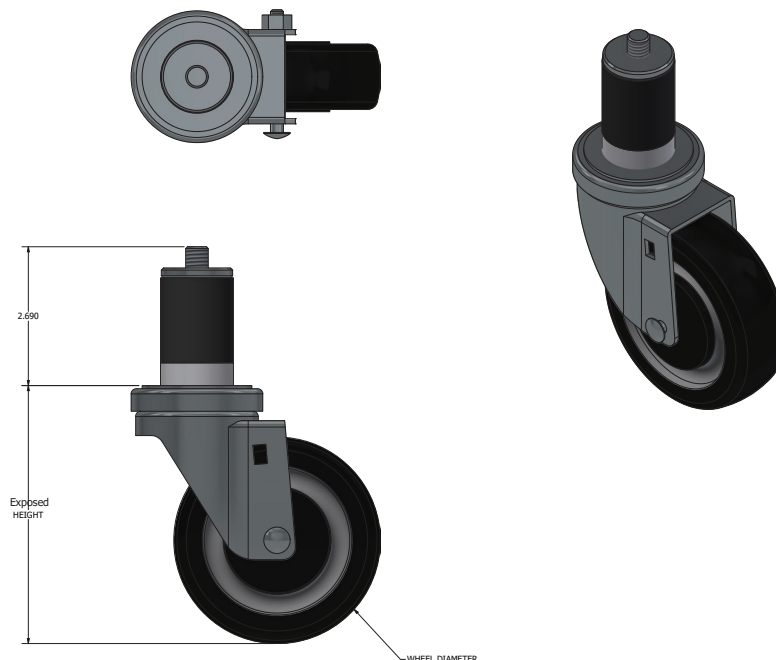

© BK Resources August 2026

Phone: 888-310-4393

Fax: 888-310-4394

Website: www.bk-resources.com

Email: sales@bk-resources.com

PRODUCT DATA SHEET

BK RESOURCES

