



TRUE MANUFACTURING CO., INC. • U.S.A. FOODSERVICE DIVISION • 2001 East Terra Lane • O'Fallon, Missouri 63366-4434  
ph. 636.240.2400 • toll free 800.325.6152 • fax 636.272.2408 • parts fax 636.272.9471 • www.truemfg.com

|              |          |         |       |
|--------------|----------|---------|-------|
| PROJECT NAME | LOCATION |         | AIA # |
| ITEM #       | QTY      | MODEL # | SIS # |

# SPEC SERIES®

REACH-IN GLASS SWING DOOR REFRIGERATORS WITH HYDROCARBON REFRIGERANT & VERTICAL LED LIGHTING

|        |                |                |                |
|--------|----------------|----------------|----------------|
| models | STR3RVLD-3G-HC | STA3RVLD-3G-HC | STG3RVLD-3G-HC |
|--------|----------------|----------------|----------------|



## STR3RVLD-3G-HC

|          |                                                                 |
|----------|-----------------------------------------------------------------|
| Exterior | Stainless steel door, front & sides.                            |
| Interior | Stainless steel side walls, back, floor, door liner, & ceiling. |
| Shelving | (3) Heavy duty, chrome plated, wire shelves per section.        |

## STA3RVLD-3G-HC

|          |                                                                 |
|----------|-----------------------------------------------------------------|
| Exterior | Stainless steel door, front & sides.                            |
| Interior | Aluminum side walls & back.<br>Stainless steel floor & ceiling. |
| Shelving | (3) Heavy duty, chrome plated, wire shelves per section.        |

## STG3RVLD-3G-HC

|          |                                                                 |
|----------|-----------------------------------------------------------------|
| Exterior | Stainless steel door, with matching aluminum sides.             |
| Interior | Aluminum side walls & back.<br>Stainless steel floor & ceiling. |
| Shelving | (3) Heavy duty, PVC coated, wire shelves per section.           |

## SPECIFICATIONS


| Dimensions  | in.                            | mm.           |
|-------------|--------------------------------|---------------|
| Length      | 77 <sup>3</sup> / <sub>4</sub> | 1975          |
| Depth       | 33 <sup>3</sup> / <sub>4</sub> | 858           |
| Height      | 77 <sup>3</sup> / <sub>4</sub> | 1975          |
| Electrical  | U.S.                           | International |
| Horsepower  | 1/4                            | N/A           |
| Amps        | 6.1                            | N/A           |
| Voltage     | 115/60/1                       |               |
| NEMA        | 5-15P                          |               |
| Cord Length | 9 ft.                          | 2.74 M.       |



115/60/1  
NEMA-5-15R

\* Height does not include 6<sup>1</sup>/<sub>8</sub>" (156 mm) for castors or 6" (153 mm) for optional legs.  
† Depth does not include 1<sup>1</sup>/<sub>2</sub>" for door handle.

## plan view

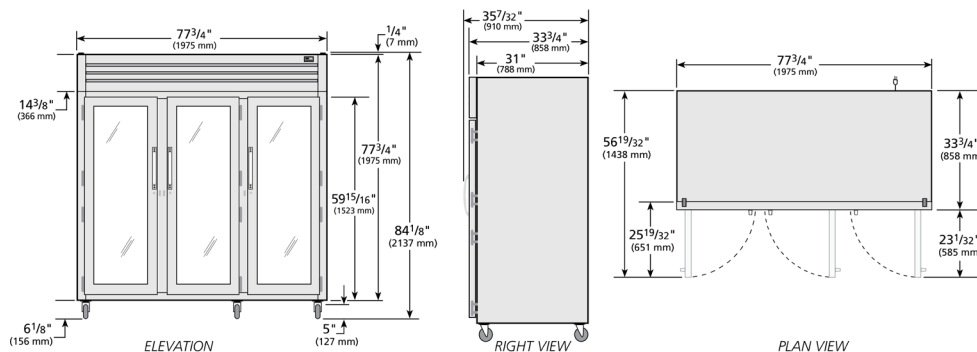

Specifications subject to change without notice.  
Chart dimensions are rounded up to the nearest 1/8" (millimeters rounded up to the next whole number).



APPROVALS

AVAILABLE AT



TRUE MANUFACTURING CO., INC. • U.S.A. FOODSERVICE DIVISION • 2001 East Terra Lane • O'Fallon, Missouri 63366-4434  
ph. 636.240.2400 • toll free 800.325.6152 • fax 636.272.2408 • parts fax 636.272.9471 • www.truemfg.com

|              |          |         |
|--------------|----------|---------|
| PROJECT NAME | LOCATION | AIA #   |
| ITEM #       | QTY      | MODEL # |
|              |          | SIS #   |

# SPEC SERIES®

REACH-IN GLASS SWING DOOR REFRIGERATORS WITH HYDROCARBON REFRIGERANT & VERTICAL LED LIGHTING

|        |                |                |                |
|--------|----------------|----------------|----------------|
| models | STR3RVLD-3G-HC | STA3RVLD-3G-HC | STG3RVLD-3G-HC |
|--------|----------------|----------------|----------------|



## standard features

### REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydrocarbon refrigerant that has zero (0) ozone depletion potential (ODP), & three (3) global warming potential (GWP).
- High capacity, factory balanced refrigeration system that maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- State of the art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies and move a more consistent volume of air which produces less heat, reduces energy consumption and provides greater motor reliability.
- Top mounted refrigeration system with evaporator positioned out of food zone.
- Electronic control.

### CABINET CONSTRUCTION

- Insulation - entire cabinet structure is foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- 5" (127 mm) diameter plate castors - locks provided on front set.

### DOORS

- "Low-E", double pane thermal insulated glass.

- Lifetime guaranteed bolt style door locks.
- Lifetime guaranteed heavy duty all metal working door handles.
- Positive seal self-closing doors with 120° stay open feature. Lifetime guaranteed external cam lift door hinges, four (4) per door section.
- Magnetic door gaskets of one piece construction, removable without tools for ease of cleaning.

### STANDARD SHELVING

- STR Series Shelving - (3) heavy-duty, chrome-plated wire shelves per section. Left & right section shelves are 23 13/16" L x 25 5/16" D (605 mm x 643 mm). Center section shelves are 24 13/16" L x 25 5/16" D (631 mm x 643 mm). Four (4) chrome plated shelf clips included per shelf.
- STA Series Shelving - (3) heavy-duty, chrome-plated wire shelves per section. Left & right section shelves are 23 13/16" L x 25 5/16" D (605 mm x 643 mm). Center section shelves are 24 13/16" L x 25 5/16" D (631 mm x 643 mm). Four (4) chrome plated shelf clips included per shelf.
- STG Series Shelving - (3) heavy-duty, PVC-coated, wire shelves per section. Left & right section shelves are 23 13/16" L x 25 5/16" D (605 mm x 643 mm). Center section shelves are 24 13/16" L x 25 5/16" D (631 mm x 643 mm). Four (4) chrome plated shelf clips included per shelf.

### LIGHTING

- Vertical LED interior lighting mounted on interior of cabinet. Lighting runs entire length of door opening. Safety shielded.

### MODEL FEATURES

- Exterior digital temperature display, available with either °F or °C.
- Evaporator epoxy coated to eliminate the potential of corrosion.
- Curb mounting ready.
- NSF/ANSI Standard 7 compliant for open food product.

### ELECTRICAL

- Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.

### OPTIONAL FEATURES/ ACCESSORIES

*(upcharge & lead times may apply)*

- 6" (153 mm) standard legs.
- 6" (153 mm) seismic/flanged legs.
- 6" (153 mm) stainless steel legs.
- Grey wine shelves. (STR, STA, STG)
- Additional shelves.
- Stainless back. (STR, STA, STG)



METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



| Model            | Elevation | Right | Plan | 3D | Back |
|------------------|-----------|-------|------|----|------|
| ST( )3RVLD-3G-HC |           |       |      |    |      |