



The Signature of Quality

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue
Belleville, Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com

Project Name: _____

Item #: _____

Model #: _____ Qty: _____

Approval: _____

AIA #

SIS #

VISION SERIES - Square End Self-Serve Refrigerated Case - 60"

Designed with impulse sales in mind. Get maximum return from an attention-grabbing merchandiser and increase profits.



Model VRSS4878S
Shown with Options

OPTIONAL ACCESSORIES

- | | |
|--|--|
| ☐ 3500K LED lights below shelves | ☐ Graphics package |
| ☐ White interior (including shelves) | ☐ Solid end panels (mirrored interior) |
| ☐ Stainless steel interior (including shelves) | ☐ Reflective end glass |
| ☐ Stainless steel or glass shelves in lieu of black | ☐ Clear or reflective glass, sliding rear doors (Solid hinged on 36" cases) |
| ☐ Deli meat pegs | ☐ 6" legs (152mm) |
| ☐ Additional lighted 3500K LED shelf | ☐ Seismic legs |
| ☐ Field Install - High-capacity condensate evaporator assembly - Separate (1500W 120V, 15 AMP circuit required) | ☐ Skirt w/4" casters or legs |
| ☐ Condensate evaporator assembly (field install) (separate 120V, 20A circuit required) (remote only) | ☐ 2 1/2" (63.5mm) recessed or 4" (101.6mm) casters (self-contained models only) (Weight limits may apply) |
| ☐ Remote refrigeration with condensate pump (EEV included) | ☐ Joining kit for continuous line-ups (not available with casters) |
| ☐ Self-cleaning condenser | ☐ Front wire display basket |
| ☐ Rear air intake and discharge | ☐ Front cart bumper |
| ☐ Stainless steel exterior finish | ☐ Roll-Down locking security cover (black, white, or gray) Stand alone models only |
| | ☐ Black polycarbonate removable locking security cover |

*Additional options available on the website and price list.

MODEL	DIMENSIONS (Includes End Panels)
☐ VRSS3660S	36 x 33 x 60 (in) 914 x 838 x 1524 (mm)
☐ VRSS4860S	47.25 x 33 x 60 (in) 1200 x 838 x 1524 (mm)
☐ VRSS6060S	59.25 x 33x 60 (in) 1505 x 838 x 1524 (mm)
☐ VRSS7260S	71.25 x 33x 60 (in) 1810 x 838 x 1524 (mm)

STANDARD FEATURES

Model Features

- Black interior including shelves
- Stainless steel display deck
- Tempered glass ends
- Black powder coated base frame
- Moisture resistant end panel construction
- Choice of standard colors on lower millwork panel
- Black trim
- Adjustable leg levelers
- Cord & plug, self-contained only
- Front air intake / rear discharge or front intake / front discharge
- Energy saving night curtain
- Matches profile of the VRSS & VHSS models

Refrigeration

- R290 refrigerant
- Electronic temperature control maintains 38°-40°F (3.3°-4.4°C) Note: Case temperatures will vary if the air curtain is disrupted.
- Digital thermometer
- Clear coil on demand defrost
- Coated evaporator coil

Shelving

- Two tiers of adjustable black metal shelves with black price tag molding
- Shelves can be flat or slanted down at 10°

Lighting

- 3500K LED top light

Agency Approvals

- UL, C-UL and UL Sanitation listed to NSF-7, Type I conditions
- DOE 2017 compliant



WARRANTY*
One year Parts and Labor
2nd thru 5th year part only
service compressor
(U.S.A. and Canada)

Note: Information is subject to change at any time. Visit www.federalind.com for the most current specs.

AIA #

VISION SERIES - Square End Self-Serve Refrigerated Case - 60"

SIS #

Product Specifications

Intended Environment: Type I - Designed to operate in maximum ambient conditions of 75°F (24°C) and 55% relative humidity

Zone

Intended Product To Be Displayed

Avg Prod Temp °F/°C

All

Packaged Refrigerated Products

38°F / (3.3°C)

DIMENSION: xx"/(mm)

DIMENSION TOLERANCE +/- 0.25 (6.4)

SYMBOL KEY:




SYMBOL KEY:

SYMBOL KEY:
(J) ELECTRICAL JUNCTION BOX
 (SUPPLIED W/6" LEADS OR POWER CORD)

☐ TUB DRAIN LOCATION

R REMOTE REFRIGERATION
LINE CONNECTION

NOTE:
6" CLEARANCE NEEDED BEHIND UNIT
FOR CONDENSER AIR VENTILATION.

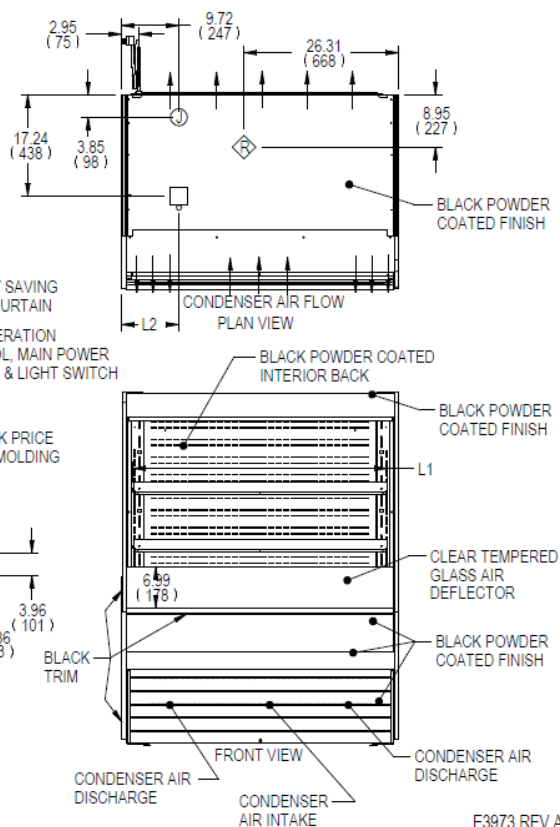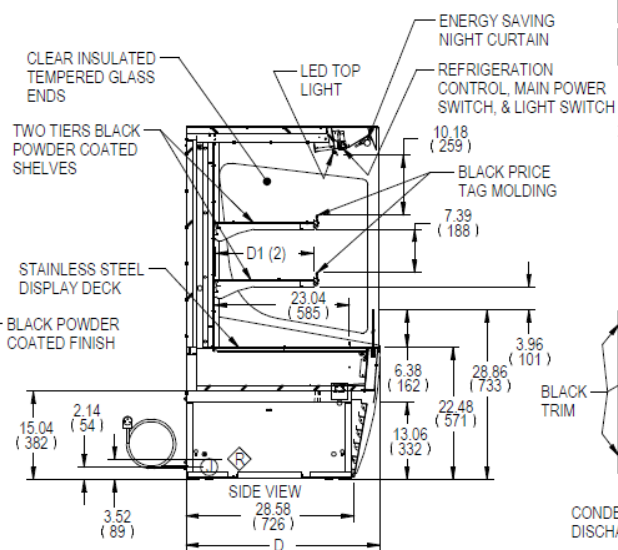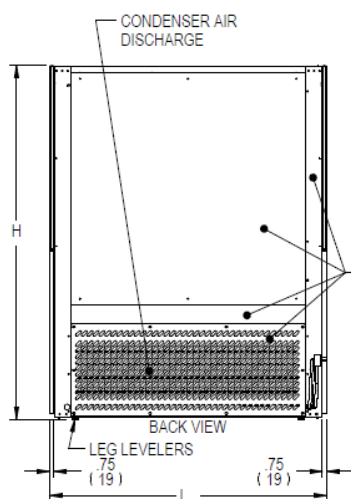

E3973 REV A

MODEL	DIMENSIONS			TUB DRAIN	SHELVING			INTERIOR VOLUME CU FT	ELECTRICAL 2 WIRE + GROUND	STANDARD CONNECTION CORD & PLUG			REFRIGERANT	CONDENSATE REMOVAL	SHIP	PERMANENT	REFRIGERANT	BTU'S @ + 20°	CONDENSATE REMOVAL	SHIP								
	L	D	H	L2	# OF TIERS	L1	D1			AMPS	MAX FUSE SIZE	NEMA CORD &			LBS	AMPS				MAX FUSE	LBS							
	in	in	in	in		in	in															in	in	in	in	in	in	in
	mm	mm	mm	mm		mm	mm															mm	mm	mm	mm	mm	mm	mm
VRSS3660S	36	33	60	6.74	2	32.25	16.634	13.98	120/60/1	16	20	NEMA 5-20P	R290	INTEGRATED PAN	535	2.5	15	R449A	6,720	PUMP	490							
	914	838	1524	171		819	423								243						222							
VRSS4860S	47.25	33	60	13.49	2	43.25	16.634	18.48	208-240/60/1	11	20	NEMA 6-20P	R290	INTEGRATED PAN	620	3.0	15	R449A	9,580	PUMP	580							
	1200	838	1524	343		1099	423								281						263							
VRSS6060S	59.25	33	60	14.12	2	55.25	16.634	23.39	208-240/60/1	16	20	NEMA 6-20P	R290	INTEGRATED PAN	755	3.5	15	R449A	11,200	PUMP	710							
	1505	838	1524	359		1403	423								342						322							
VRSS7260S	71.25	33	60	20.12	2	67.25	16.634	28.30	208-240/60/1	16	20	NEMA 6-20P	R290	INTEGRATED PAN	845	3.5	15	R449A	12,300	PUMP	800							
	1810	838	1524	511		1708	423								383						363							

- Due to continuing engineering improvements, specifications are subject to change without notice
- Case temperature will vary if the air curtain is disrupted.



The Signature of Quality.

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue Belleville, Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com