



DISHWASHER UX-130BCV 400/50/3N DD

Rack size 500 mm x 500 mm and door clearance 440 mm. Double-skinned hood.

P/N 1303437



WARE WASHING
PASS-THROUGH WAREWASHERS

SALES DESCRIPTION

Top panel.

Sani-Control: guaranteed disinfection.

Double-walled hood: insulation and energy efficiency.

Exclusive Hydroblade™ washing arms: maximum effectiveness.

3-stage filtering system.

Steam condenser: environmental improvement and energy efficiency.

Sani-Control guarantee

- ✓ GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- ✓ THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.
- ✓ CONSTANT HIGH TEMPERATURE RINSE system for optimal disinfection.
- ✓ The PRESSURE PUMP guarantees effective high-pressure rinsing.
- ✓ WRAS certified.

Steam condenser

- ✓ Reduces the steam released into the installation by 75%.
- ✓ Factory-integrated condenser module, no installation required.

New recessed bodywork

- ✓ Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- ✓ Compact tank volume (50% water saving compared to the previous range).

Double-Walled (Ultra ISO)

- ✓ Double-Walled Structure: thermo-acoustic insulation to attenuate the sound level and improve energy efficiency

Hydroblade™ washing arms

- ✓ Redesigned nozzles for greater washing performance.
- ✓ The “monoblock” design delivers durability and resistance to impacts.
- ✓ 30% savings in water consumption during rinsing compared to the previous range.

3-stage filter system: surface, tank and extraction

- ✓ Keeps the washing water in optimal conditions to maintain constant washing performance.

Designed to last

- ✓ “Flow” opening mechanism: allows the hood to be raised with less effort
- ✓ High load capacity 43 cm: suitable for GN 1/1 and Euronorm
- ✓ Stainless steel surface filters for greater stability and resistance during intensive use

Premium warewashing

- ✓ Soft start: progressive start-up of the washing pump to protect fragile items.
- ✓ Top panel: it allows quick and intuitive reading of information, ideal for corner installations.
- ✓ Colour LCD Display: intuitive communication of the machine status by means of messages, colour codes and icons.
- ✓ Dedicated cycles: selection of the ideal washing programme using icons.
- ✓ Adaptable: allows the main parameters of the machine to be adjusted to the needs of each user.
- ✓ TEMPERATURE DISPLAY
- ✓ Wash Plus+ function: increases the intensity of the wash cycle for greater cleaning performance
- ✓ Control panel with IP65 humidity protection.

You will never WASH ALONE

- ✓ Tech-Services: our team of technicians will help you so that your machine is always ready for use.
- ✓ Design Services: tell us what your needs are and we will advise you.
- ✓ 60 years of experience and know-how at your disposal.

INCLUDES

- ✓ Rinse aid pump.
- ✓ Detergent Dispenser
- ✓ 1 glasses basket.
- ✓ 1 mixed basket (plates).
- ✓ 1 cutlery basket.
- ✓ Drainage pump with level sensor. Proactive tank water renewal.

OPTIONAL

- Automatic resin regeneration water softener with salt detector.

ACCESSORIES

- Tables for pass-through dishwashers
- Manual water softeners
- Automatic water softeners
- 500 x 500 mm baskets
- Inserts & supplements
- Central sorting tables
- Double connection central sorting table
- Prewashing tables for pass-through and rack conveyor dishwashers
- Connecting tables for pass-through dishwashers and rack conveyors
- Reverse osmosis devices OS-140

SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm
Useful height: 440 mm



product sheet
updated 20/11/2024



DISHWASHER UX-130BCV 400/50/3N DD

Rack size 500 mm x 500 mm and door clearance 440 mm. Double-skinned hood.

P/N 1303437

Cycles: 6
 Cycle duration: 60/90/100/150/210"
 Production baskets / hour: 60 / 40 / 36 / 24 / 17

Boiler capacity: 12 l
 Wash tank capacity: 23 l


Consumption and savings

- ✓ Water consumption/cycle: 2.7 l
- ✓ Automatic saving mode in: 25'
- ✓ Automatic switch-off: 120'

Energy consumption

- Loading__
- ✓ Pump: 1000 W / 1.33 Hp
 - ✓ Tank: 2500 W
 - ✓ Boiler: 9000 W

- ✓ Total loading: 9000 W
- Electrical supply: 400 V / 50 Hz / 3N~ (16.0 A)__
- External dimensions (W x D x H)__
- ✓ Width: 640 mm (Wide with handle: 732 mm)
- ✓ Depth: 756 mm (Bottom with handle: 860 mm)
- ✓ Height: 1920 mm / 1468 mm
- Net weight: 143 kg
- Wash temperature: 65°C
- Rinse temperature: 90°C
- Noise level (1m.): 65 dB(A)
- Crated dimensions
 760 x 860 x 1500 mm
- Gross weight: 154 kg

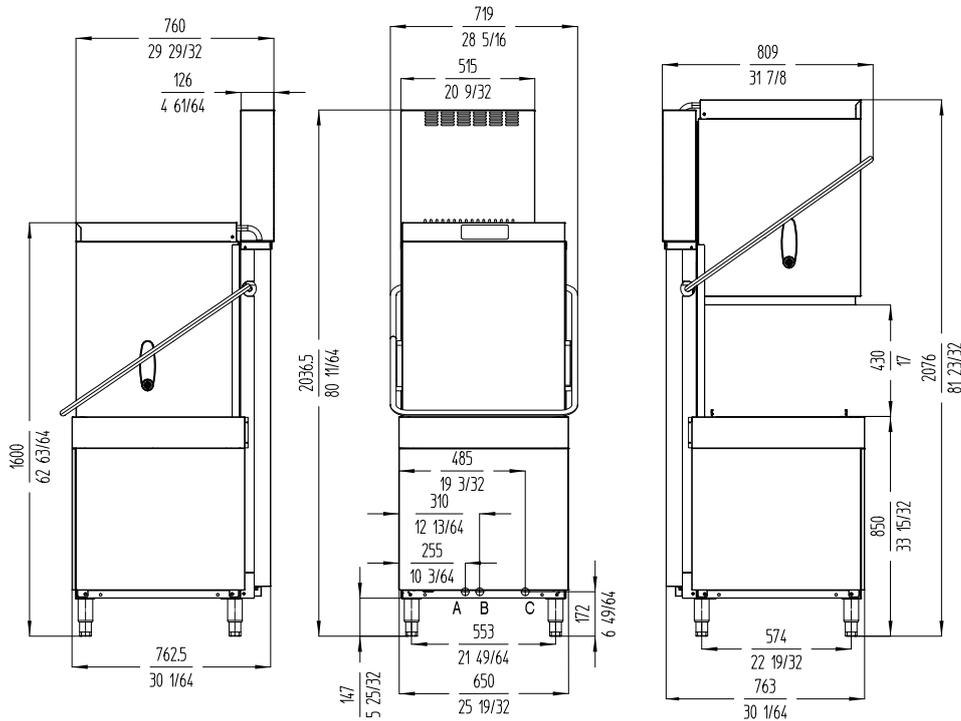

A: Entrada de agua 3/4" GAS
 B: Tubo de desague Ø30mm
 C: Cable conexion



www.sammic.co.uk

Food Service Equipment Manufacturer

Unit 2, Trevanah Road
 Troon Industrial Park
 LE4 9LS - Leicester

uksales@sammic.com
 Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved

product sheet
 updated 20/11/2024

WARE WASHING
 PASS-THROUGH WAREWASHERS