	BEVERAGE-AIR.
--	---------------

B	BEVERAGE	-AIR
---	----------	------

WORKTOP SIDE MOUNT REFRIGERATOR

WTRD93AHC Worktop Refrigerator With Drawers Hydrocarbon Series



CABINET CONSTRUCTION

- Stainless steel front, sides, drawers and grille (galvanized back &
- Interior liner is made of corrosion resistant aluminum
- Stainless steel worktop for added durability
- 16 Gauge stainless steel top
- Full electronic control
- Interior thermometer is standard
- 4" Foamed-in-place backsplash
- Snap-in drawer gaskets
- Upper and lower pull-out drawers accommodate 6" deep pans
- Stainless steel drawer frames supported on telescoping drawer slides
- Drawer slides include locking mechanism that prevents drawer from being inadvertently pulled off cabinet
- 6" Casters, (2) with brakes standard

OPTIONS & ACCESSORIES

- · Stainless steel back
- Stainless steel interior
- · Cutting board
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- · Low profile casters
- Roller kit
- Flat-top with no backsplash (-FLT)
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- · Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F










3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com




MODEL	WTRD93AHC-6		
EXTERNAL DIMENSIONAL DATA			
Width Overall	93 1/8"		
Depth Overall with Handle & Bumper	35 ¾"		
Height Overall with 6" Casters	39 ½"		
Number of Drawers	6		
Depth with Drawer Extended	57 ½"		
Drawer Openings	21 5/6" x 10 3/6" 21 5/8" x 10 1/4"		
INTERNAL DIMENSIONAL DATA			
NET Capacity (cubic ft.)	29.7		
Internal Width Overall (in)	89"		
Internal Depth Overall (in)	26"		
Internal Height Overall (in)	25"		
ELECTRICAL DATA			
Full Load Amperes	5.0		
Voltage	115/60/1		
Nema Plug (8' cord)	5-15P		
REFRIGERATION DATA			
Horsepower	1/3		
Capacity (BTU/Hr)	2629		
Heat Rejection (BTU/Hr)	3943.5		
Charge (lbs/grams/ounces)	0.3086 / 140 / 4.9		
SHIPPING DATA			
Gross Weight - Crated	606 lbs		
Height - Crated	48"		
Width - Crated	96"		
Depth - Crated	37"		

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).





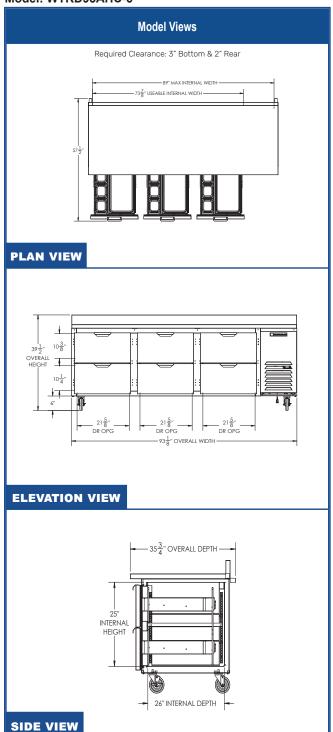

ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord NEMA 5-15P and plug set.

