



BEVERAGE-AIR®

PROJECT: _____
 ITEM # _____ QTY: _____
 MODEL # _____
 AIA # _____ SIS # _____
 APPROVED: _____

UNDERCOUNTER REFRIGERATOR / FREEZER

Model: UCRF48AHC

TWO DOORS / DUAL TEMPS



7 YEAR WARRANTY Parts, Labor, and Compressor

CABINET CONSTRUCTION

- Stainless steel front, sides, doors, and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Dual Temp: left side refrigerator, right side freezer unit provide two different operating temperature zones for different types of products
- Full electronic control
- Undercounter feature a 1/2" thick sub-top
- Internal thermometer is standard
- Self-closing doors with 120° stay-open feature, on cartridge style hinges
- Magnetic gasket attached to each door for positive seal
- Painted aluminum door handles
- 6" Casters, two (2) with brakes standard
- Four (4) epoxy-coated steel wire shelves
- Field reversible doors (hinge kit not included)



OPTIONS & ACCESSORIES

- Stainless steel back
- Stainless steel interior
- Right or left hinged door
- Locks (solid doors only)
- Bun rack
- Wire shelf divider
- 3" Casters or 6" legs
- Low profile casters
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F




BEVERAGE-AIR®


Undercounter Refrigerator / Freezer

Model: UCRF48AHC


PLAN VIEW

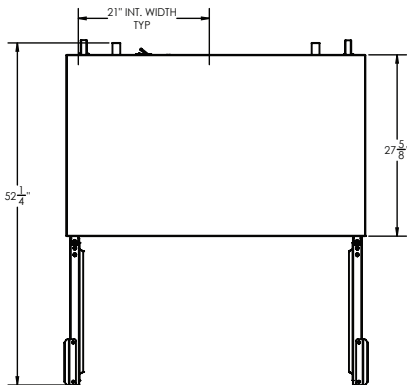

ELEVATION VIEW

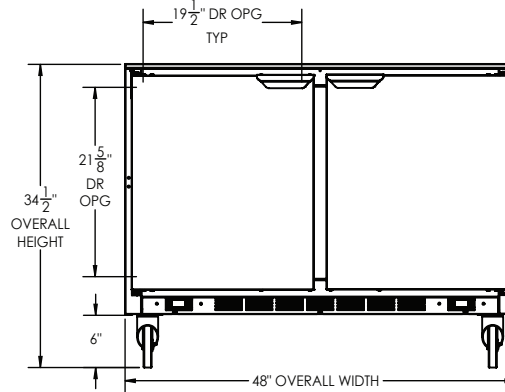

SIDE VIEW

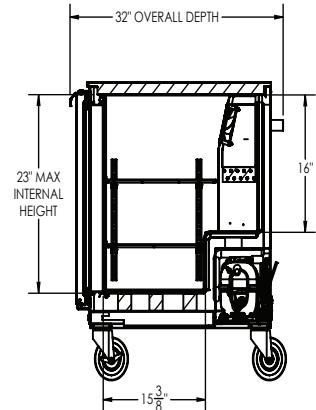

EXTERNAL DIMENSIONAL DATA

Width Overall (in)	48"
Depth Overall (in)	32"
Height Overall (in)	34 1/2"
Number of Doors	2
Depth with Door Open 90 °	52 1/4"
Door Openings (in)	19 1/2" x 21 5/8"

INTERNAL DIMENSIONAL DATA

NET Capacity (cubic ft.)	(R) 5.31 (F) 5.31 cu.ft.
Internal Width Overall (in)	(2) 21"
Internal Depth Overall (in)	15 3/8"
Internal Height Overall (in)	23"
Number of Shelves	4

*NOTE: Remote units are field wired and come with 6" legs.
Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

Required Clearance: 3" Bottom & 2" Rear

ELECTRICAL DATA

Full Load Amps	(R) 2.5 (F) 2.0
Voltage	115/60/1
Nema Plug (8' cord)	(2) 5-15P

REFRIGERATION DATA

Horsepower	(R) 1/4 (F) 1/6
Capacity (BTU/Hr)	(R) 857 (F) 1110
Heat Rejection (BTU/Hr)	2950.5
Charge (lbs/grams/ounces)	(R) 0.1323 / 60 / 2.12 (F) 0.0992 / 45 / 1.59

SHIPPING DATA

Gross Weight - Crated	295 lbs.
Height - Crated (in)	34"
Width - Crated (in)	52"
Depth - Crated (in)	32"

ELECTRICAL CONNECTION



115/60/1
(2) NEMA 5-15P

Unit pre-wired at factory
and include 8' long cord
and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com

Date Issued 9/26 | Printed in U.S.A.