

MODELS

- ☐ MSC-30 ☐ MSC-52
- ☐ MSC-41 ☐ MSC-70



MSC-52



FEATURES

CONSTRUCTION

- Standard interior LED lighting with separate on/off switch
- Curved tempered glass sliding lids
- White zinc-coated baked-on enamel steel exterior
- Painted white powder-coated steel interior
- Removable rubber bumper guards on grille side
- Heavy-duty casters, two locking
- Bottom drain with plug
- Lid lock and keys
- The unobtrusive frame around the glass lids ensures a highly visible display
- External digital thermometer display
- Control panel with adjustable temperature range of +10 to -18°F
- Low energy consumption

REFRIGERATION

- Refrigerant: R290
- Temperature range: -18° to 10°F (-27° to -12°C)

WARRANTY


- Standard one year parts and labor

OPTIONS


- ☐ Extra basket dividers
- ☐ Replacement baskets

STANDARD BASKETS

MODEL	NO. OF BASKETS/DIVIDERS
MSC-30	3/3
MSC-41	4/4
MSC-52	5/5
MSC-70	6/6




Horizontal divider

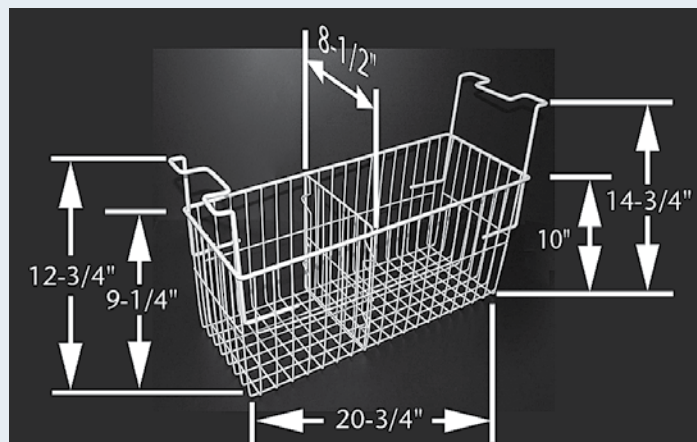

TECHNICAL SPECIFICATIONS

Models	MSC-30	MSC-41	MSC-52	MSC-70
Crated Weight (lbs) (kg)	132 (60)	161 (73)	187 (85)	227 (103)
Crated Height (in) (mm)	37-7/8 (960)	37-7/8 (960)	37-7/8 (960)	37-7/8 (960)
Crated Width (in) (mm)	31-1/8 (790)	42-1/2 (1080)	53-1/8 (1350)	71-1/4 (1810)
Crated Depth (in) (mm)	28-3/8 (720)	28-3/8 (720)	28-3/8 (720)	28-3/8 (720)
Interior Height (in) (mm)	28-1/2 (725)	28-1/2 (725)	28-1/2 (725)	28-1/2 (725)
Interior Width (in) (mm)	24-7/8 (630)	36-1/4 (920)	46-5/8 (1185)	64-7/8 (1650)
Interior Depth (in) (mm)	20-7/8 (530)	20-7/8 (530)	20-7/8 (530)	20-7/8 (530)
Overall Height (in) (mm)	35-7/8 (910)	35-7/8 (910)	35-7/8 (910)	35-7/8 (910)
Overall Width (in) (mm)	29-1/2 (750)	40-7/8 (1040)	51-5/8 (1310)	69-5/8 (1770)
Overall Depth (in) (mm)	25-1/2 (650)	25-1/2 (650)	25-1/2 (650)	25-1/2 (650)
Gross Cubage (CuFt) (L)	7.1 (201)	10.9 (309)	14.4 (408)	20.5 (581)
Number of Baskets*	3	4	5	6
Number of Casters	4	4	4	4
Condensing Unit Size (HP)	1/5	1/3	1/3	1/2
Refrigerant	R290	R290	R290	R290
Electrical Characteristics	115/60/1	115/60/1	115/60/1	115/60/1
NEMA Plug Configuration	5-15P	5-15P	5-15P	5-15P
Total Amp Draw	2.0	3.0	3.0	5.0

*Includes 1 divider per basket.

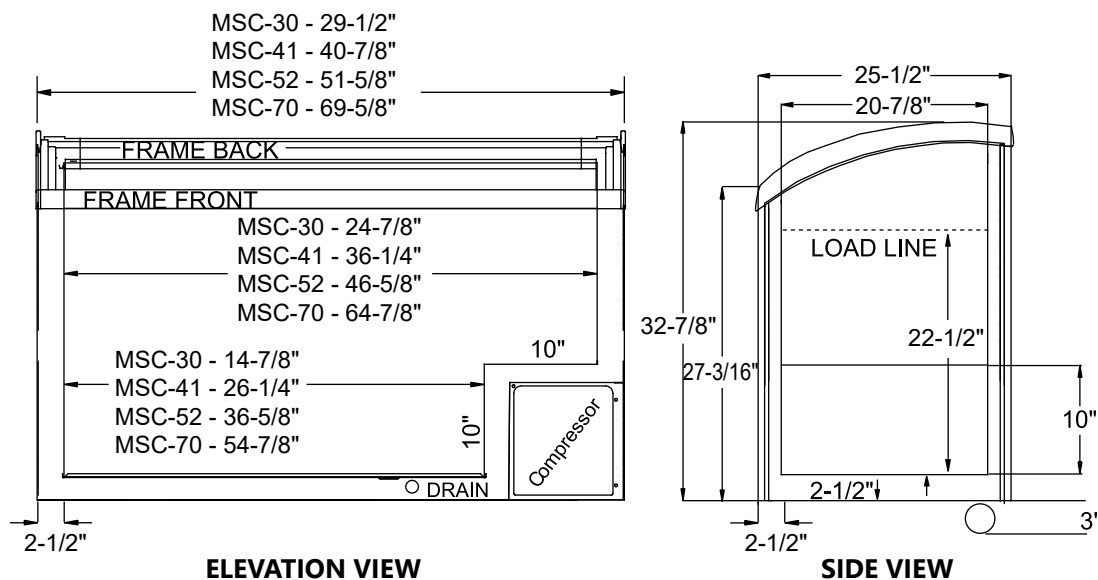

LISTINGS



HOOKUP

Via plug in, 6-1/2 foot long, flexible 3 wire 14AWG/3 cord with molded plug.



BID SPECIFICATIONS

Item no. MSC-_____

Provide _____()

Curved Lid Display Freezer(s)

Master-Bilt model MSC-_____.

Freezer to be constructed of a white zinc-coated baked-on enamel on steel exterior with painted white powder-coated steel interior. Freezer to be furnished

with standard LED interior lighting. Also standard with baskets, basket dividers, thermometer and lock. Additionally, it will be provided with heavy-duty casters and a defrost water drain. Lids will contain tempered safety glass.

Refrigeration system will use R290 refrigerant in all models.

The temperature range will be -9.4° to -0.4°F (-23° to -18°C).

Freezer to have standard one year parts and labor warranty.

Freezer to be UL listed in the U.S. and Canada, UL EPH, NRCan and State of California.

NOTE: Cabinets designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity.