



**Catalogue**  
**FOOD SERVICE**  
**Chapter**  
**COOK & CHILL**

**Specific model**  
CW-0623-E R SW 400V 3N 50/60Hz

12/10/2023

**DENOMINATION:**

iKORE oven Concept (digital control panel), DirectSteam (injection models) with intelligent washing system for 6 trays GN 2/3, electric heating.

**DESCRIPTION :**

**FUNCTIONS:**

- 2.8" screen with rotary knob and push function for configuring and confirming inputs
- iClima:
  - . Humidity management and control by means of direct measurement with a humidity sensor
  - . 10% regulation capacity- Fagor Recipe Center
- Fagor Recipe Center:
  - . 100 factory preset and culinary tested recipes
  - . Storage capacity for more than 100 9-stage recipes
- Air and water cool-down (rapid cabinet cooling function)
- Cooking modes: low temperature steam 30-98°, steam 99°, super steam 100- 130°, mixed 20-300° and convection 20-300°
- Chamber dehumidification for crispy roasts

**- Delta cooking**

**DIRECTSTEAM:**

- Steam generation by injecting water into the turbine, atomising the water and converting it into steam.


**CONTROLS:**

- Languages: 5
- Ability to configure screen tone, volume and contrast.
- Tone: 8
- Power, network and language settings.
- SAT and Trade fair mode

**EQUIPMENT FEATURES:**

- Stop/start function
- EZ-Sensor. Internal probe with 4 measuring locations
- Positioning aid for temperature sensor
- Manual steam injection
- Automatic humidification system
- Variable humidification with 5 levels
- 6 programmable air circulation speeds (from 1400 rpm to turbine stop)
- Option to switch from °C to °F
- Display of actual values and selected values
- Delayed programming
- Ability to select 1/2 power
- Automatic humidification system
- Automatic dehumidification system
- Automatic adaptation to the characteristics of the installation site (altitude, etc.) including initial self-testing
- Automatic boiling point adjustment
- Removable fan cover
- Integrated turbine brake for increased safety
- HA-Control: bidirectional turbine that provides intelligent even heat distribution
- Auto-reverse system for reversing fan rotation
- Triple-glazed, ventilated cooking chamber door (except 0623)
- Special heat-reflective coating and hinged inner panes for easy cleaning
- LED lighting in the cooking chamber
- HOLD-OPEN DOOR systems (3 locking positions for greater user safety)

**DIMENSIONS**



X Width	657 mm	X Gross width	675 mm
Y Depth	563 mm	Y Gross depth	715 mm
Z Height	570 mm	Z Gross height	776 mm
Net Weight	68,0 kg	Gross Weight	73,0 kg
Net volume	0,220 m3	Gross volume	0,375 m3

**ELECTRICITY TECHNICAL SPECIFICATIONS**

Engine power	0,40 kW
Electric power	5,800 kW
Amperage (A)	8,9A
Heating power	5,40 kW
Voltage	380-415V - 3N
Electric frequency	50/60Hz

**WATER TECHNICAL SPECIFICATIONS**

Pressure	H2O: 200-400kPa(2-4bar)
Water max consumption	10,00 L/h

**CONNECTIONS TECHNICAL SPECIFICATIONS**

230 V three-phase wiring	3X2,5MM <sup>2</sup> +T-20A
Single-phase 230V wiring	2X4MM <sup>2</sup> +T-32A
Three-phase +N 400V wiring	3X1,5MM <sup>2</sup> +N+T-10A
Water inlet diameter	3/4"
Drain 1 diameter	40

**OTHERS**

Door opening	Right
--------------	-------

**TECHNICAL FEATURES**

Number of trays	6
-----------------	---





**Catalogue**  
FOOD SERVICE  
**Chapter**  
COOK & CHILL

**Specific model**  
CW-0623-E R SW 400V 3N 50/60Hz

12/10/2023

- Proximity contact door switch
- Easily replaceable gasket insert
- Interior and outer material: AISI 304 stainless steel (interior mirror polished)

**CERTIFICATION AND INSTALLATION SYMBOLS:**

- EC declaration of conformity
- EC declaration of gas conformity
- CB safety
- IPX5 protection against splashes and jets of water
- Height adjustable equipment feet (all except 0623)
- Monitor App and Maintenance App (self-diagnosis of warnings and errors)
- Logging App:
  - . Cycle history
  - . Error history

**WASHING SYSTEM:**

- iWashing (environmentally efficient)
- Choice of iWashing Solid or iWashing Liquid smart washing systems
- Washing programmes:
  - . 1 basic cleaning programme (spray)
  - . 3 automatic cleaning programmes
  - . 1 rinsing programme
  - . 1 polishing programme
- Indication of cleaning status and remaining time

**SPECIFIC OPTIONS :**

- ELECTRIC POWER : 400V 3N 50/60HZ - 0623
- FUSE DEFINITION : 0623 E
- BRAND : FAGOR
- DOOR OPENING : R RIGHT
- WASHING SYSTEM : SW-IWASHING SOLID
- SHOWER : NO
- RACK : GN TRAY
- SOUS VIDE & THERMAL PROBE : NO
- CONNECTIVITY : NO
- CERTIFICATION : CE
- REG4: WITH REG4

**POSSIBLE ACCESSORIES :**

- CONVERSION KITS
- CLEANING ACCESSORIES
- COOKING ACCESSORIES O
- EXHAUST HOOD
- STACKING SET
- SUPPORTS OVENS
- FASTENING KIT
- VARIOUS
- KIT BAFFLE








**Catalogue**  
FOOD SERVICE  
**Chapter**  
COOK & CHILL

**Specific model**  
CW-0623-E R SW 400V 3N 50/60Hz

12/10/2023

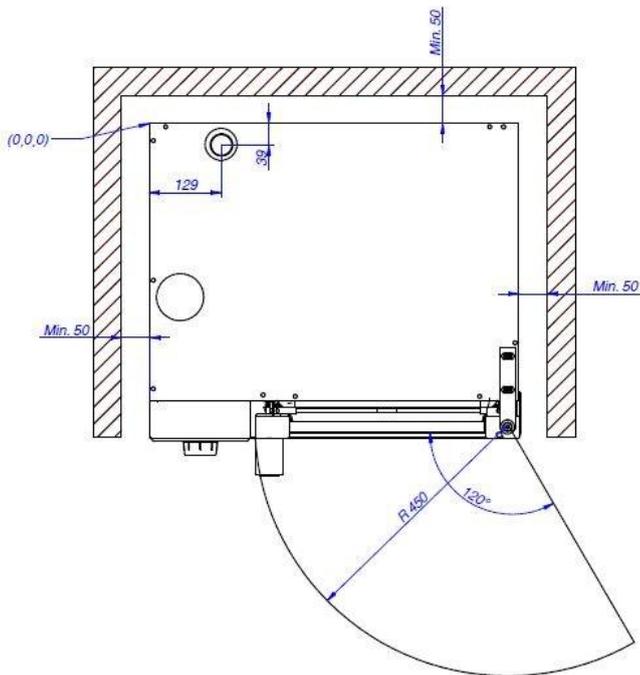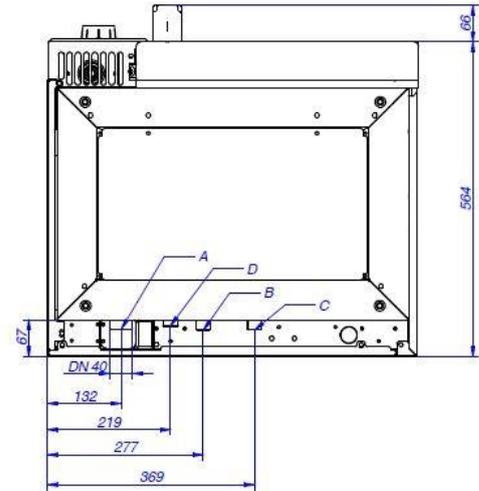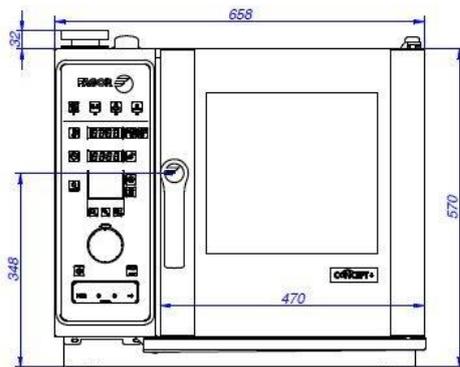

- A: DESAGUE DN40
- B: ENTRADA DE AGUA BLANDA
- C: ENTRADA DE AGUA DURA
- D: ALIMENTACIÓN ELÉCTRICA
- A: ÉGOUTTER DN40
- B: ENTRÉE D'EAU DOUCE
- C: ENTRÉE D'EAU DURE
- D: PUISSANCE
- A: DRAIN CONNECTION DN40
- B: SOFT WATER CONNECTION
- C: COLD WATER CONNECTION
- D: ELECTRICAL SUPPLY
- A: ABLASSEN DN40
- B: WEICHEM WASSERZULAUF
- C: HARTEM WASSERZULAUF
- D: POWER
- A: SCARICO DN40
- B: INGRESSO DELL'ACQUA DOLCE
- C: INGRESSO DELL'ACQUA DURA
- D: POTENZA