

# FRONT TO BACK DOUBLE HOB INDUCTION COOKTOP



## NON-TOUCH DISPLAY



HELIOS STANDARD, FREESTANDING



HELIOS STANDARD, DROP-IN

## TOUCH DISPLAY



HELIOS TOUCH, FREESTANDING

## FEATURES

- Helios STANDARD with 2 individual rotary control knobs and power/temperature button. Free-standing or drop-in
- Helios TOUCH with capacitive touch screen AND single rotary control (switchable to control each side). Freestanding only
- 5kW, 6kW or 7kW 240V single phase (2 x 2.5kW, 2 x 3.0kW or 2 x 3.5kW per hob)
- Freestanding or drop-in design with stainless steel housing
- Front to back orientation
- TOUCH model with rotary control knob PLUS capacitive touch screen. Colour screen can be viewed from any angle
- High-quality electronics and heavy gauge Litz wire for maximum control and reliability
- Easy-to-clean high temperature ceramic-glass top
- Even heat distribution across bottom of cookware\*
- Automatic pan detection for instant energy transmission to pan
- Automatic shut-off feature prohibits overheating
- Washable metal grease filter (free-standing units)
- Microprocessor monitors vital components to check for overheating, power supply issues, and more

## INCLUDED

- FIVE year parts and labour warranty (UK & Ireland only)
- Standard Cat 5e or Cat 6 patch cable from unit to control box (drop-in only)
- Plug and cord (2m nominal)



## CERTIFICATIONS







\*Induction cooking requires the use of induction-compatible (i.e. magnetic) cookware.

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to make substitutions of components or change specifications without prior notice.



**HELIOS STANDARD  
FREESTANDING**

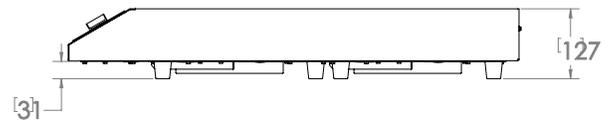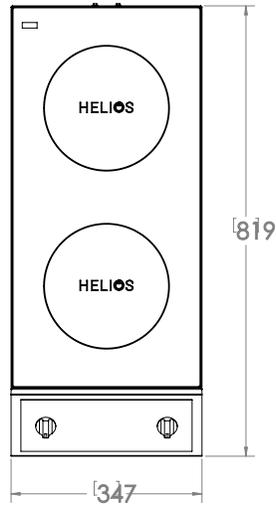

**HELIOS STANDARD  
DROP-IN**

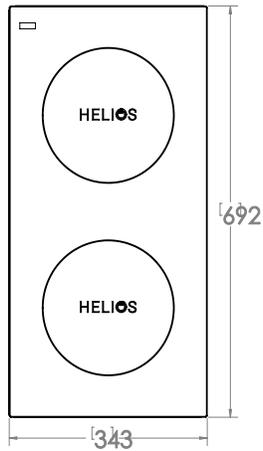

**HELIOS TOUCH  
FREESTANDING**

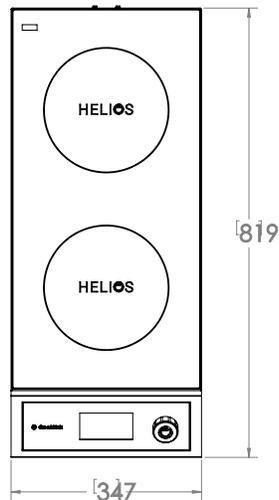

# Model numbers, Part numbers and electrical specs below apply to UK and Ireland only

DIMENSIONS - HELIOS STANDARD FREESTANDING		
Full Unit Height	5"	127 mm
Full Unit Width	13.7"	347 mm
Full Unit Depth	32.3"	819 mm
Feet Height	1.2"	31 mm
Weight	31 lb.	14 kg
Max Ambient Temperature	122°F	50°C
WALL CLEARANCE*		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm
DIMENSIONS - HELIOS STANDARD DROP-IN		
Full Unit Height	3.7"	95 mm
Full Unit Width	13.5"	343 mm
Housing Width	12.8"	324 mm
Full Unit Depth	27.3"	692 mm
Housing Depth	26.5"	673 mm
Cutout Width	13.13"	334 mm
Cutout Depth	26.88"	683 mm
Weight	30 lb.	13.6 kg
Max Ambient Temperature	122°F	50°C
<b>Internal Cooling Fan Displacement 140 CFM (4.0m3/min) Free air flow required.</b>		
WALL CLEARANCE*		
Front	Sides	Rear
2"		51 mm
DIMENSIONS - HELIOS TOUCH FREESTANDING		
Full Unit Height	5"	127 mm
Full Unit Width	13.7"	347 mm
Full Unit Depth	32.3"	819 mm
Feet Height	1.2"	31 mm
Weight	31 lb.	14 kg
Max Ambient Temperature	122°F	50°C
WALL CLEARANCE*		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm

SHIPPING INFORMATION		
Packaged Height	11"	279 mm
Packaged Width	23"	584 mm
Packaged Depth	32"	813 mm
Packaged Weight	40 lb.	18.14 kg
Item Class	250 NMFC #26710	

UK and Ireland Distributor:



MCS Technical Products Ltd  
Building 2 Westmead Ind Est, Westmead Drive  
Swindon, SN5 7YT, UK

+44(0) 1793 538308  
sales@mcstechproducts.co.uk  
www.mcstechproducts.co.uk

Helios STANDARD Double Induction Hob Freestanding Front to Back		
NEW CookTek Helios STANDARD Induction Unit, freestanding/ countertop, double hob, front to back, 2 rotary controls, 20 power levels plus temperature setting, stainless steel exterior, washable air filter, FIVE YEAR parts and labour warranty by MCS engineers		
Model No.	Part No.	Electrical spec
HRF-FB2502 (Supersedes MC2502F)	HRF-9500-FB25-2	5.0kW (2 x 2.5kW) 240V/50/1 32A round blue 3 pin plug. CE, NSF
HRF-FB3002 (Supersedes MC3002F)	HRD-9500-FB30-2	6.0kW (2 x 3.0kW) 240V/50/1 32A round blue 3 pin plug. CE, NSF
HRF-FB3502 (Supersedes MC3502F)	HRD-9500-FB35-2	7.0kW (2 x 3.5kW) 240V/50/1 32A round blue 3 pin plug. CE, NSF

Helios STANDARD Double Induction Hob Drop-in Front to Back		
NEW CookTek Helios STANDARD Induction Unit, drop-in, double hob, front to back, separate control box with 2 rotary controls, 20 power levels plus temperature setting, stainless steel exterior, FIVE YEAR parts and labour warranty by MCS engineers		
Model No.	Part No.	Electrical spec
HRD-FB2502 (Supersedes MCD2502F)	HRD-9500-FB25-2	5.0kW (2 x 2.5kW) 240V/50/1 32A round blue 3 pin plug. CE, NSF
HRD-FB3002 (Supersedes MCD3002F)	HRF-9500-FB30-2	6.0kW (2 x 3.0kW) 240V/50/1 32A round blue 3 pin plug. CE, NSF
HRD-FB3502 (Supersedes MCD3502F)	HRF-9500-FB35-2	7.0kW (2 x 3.5kW) 240V/50/1 32A round blue 3 pin plug. CE, NSF

Helios TOUCH Double Induction Hob Freestanding Front to Back		
NEW CookTek Helios TOUCH Induction Unit, countertop, double hob, front to back, touch controls and 1 rotary control for both hobs, 100 power levels plus temperature setting, colour LCD display, stainless steel exterior, washable air filter, FIVE YEAR parts and labour year warranty by MCS engineers		
Model No.	Part No.	Electrical spec
HTF-FB2502 (Supersedes MC2502FG)	HTF-9500-FB25-2	5.0kW (2 x 2.5kW) 240V/50/1 32A round blue 3 pin plug. CE, NSF
HTF-FB3002 (Supersedes MC3002FG)	HTF-9500-FB30-2	6.0kW (2 x 3.0kW) 240V/50/1 32A round blue 3 pin plug. CE, NSF
HTF-FB3502 (Supersedes MC3502FG)	HTF-9500-FB35-2	7.0kW (2 x 3.5kW) 240V/50/1 32A round blue 3 pin plug. CE, NSF

\*The provided clearances apply to a unit not placed near a heat source. Refer to the owner's manual for clearance requirements if the unit is placed near a heat source.