

PROJECT:	
ITEM #	QTY: _
MODEL #	

SIS #

AIA # .

CABINET CONSTRUCTION

Aluminum Interior

LED Lighting

Full Electronic Control

Triple-Pane Glass Door

Full Electronic Control

Product Loading

FEATURES

Sensed

REFRIGERATION

Stainless Steel Exterior (galvanized back)

Anti-Condensate Door Perimeter Heaters

One-Piece, Snap-In Magnetic Door Gasket Five (5) Heavy-Duty Epoxy Coated Shelves 6" Overall Height Casters Standard

Anti-Condensate Door Perimeter Heaters

ELECTRONIC LOCK FEATURES

Led Indicator To Quickly View Status

Hot Gas Condensate Evaporator

Consistent Product Temperatures Epoxy Coated Evaporator Coil

Easy-Access Test Switch For Health Inspectors

8' Cord And Plug (see electrical data for details)

High-Performance, Balanced, Bottom-Mounted Refrigeration

Spring-Loaded Hinge With Stay-Open Door Feature For Easy

Secure Temperature-Sensitive Product For Worry-Free Operation Automatically Locks When Power Loss Or Temperature Drop Is

Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns

Adaptive Defrost For Reduced Energy Consumption And More

Please Verify Qualifying Units By Visiting: www.energystar.gov/cfs

Freezer Capable Of Maintaining Product Temperature 0°F

BOTTOM MOUNT GLASS DOOR DISPLAY FREEZER WITH ELECTRONIC LOCK

.

LSF27HC-1-IQ



EXCLUSIVE WARRANTY

- 7 Year Parts, Labor and Compressor
- Exclusive 2 Year Warranty On Magnetic Door Gaskets
- Lifetime Warranty On Handles & Hinges (parts only)





OPTIONS & ACCESSORIES

- Stainless Steel, Black Or White Interior
- Custom Color Cabinet
- 3" Casters Or 6" Seismic Legs

Additional Shelves

- Door Swing Orientation (at time of order)
- Remote Models* (6" legs only) (refrigerant must be specified at time of order, see note on back page)

3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168 Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev 2/12/25 Printed in the U.S.A.


APPROVAL: _

OTTOM MOUNT GLASS DOOR DISPLAY FREEZER- ELECTRONIC LOC Built-In Safety Feature Allow Escape In Case Of Accidental Lock-In

DATE: _





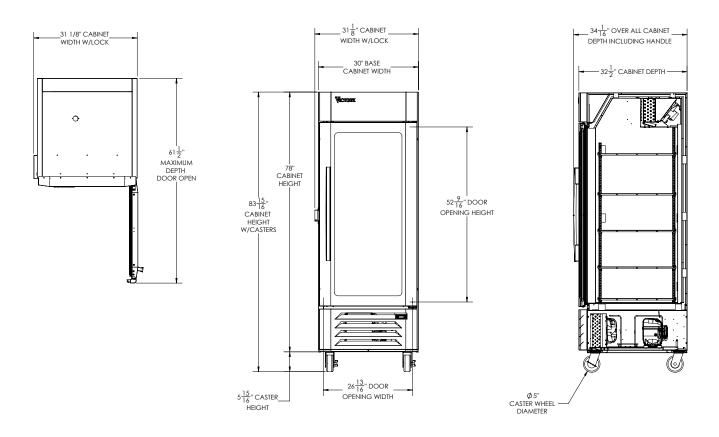

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

12" Top, 6" Bottom, 3" Sides & 3" Rear clearance is required

CHARACTERISTICS ELECTRICAL DATA		SHIPPING DETAILS			
Net Capacity (cubic ft.)	25.5	Cabinet Voltage	115/60/1	Height	85″
Width, Overall (with lock)	31 1/8"	Total Amperes	7.5	Width	33"
Depth, Overall (with handle)	34 1/16″	NEMA Plug (8' cord)	5-15P	Depth	36"
Height Overall (with casters)	83 15/16"	REFRIGERATION DATA		Crated Weight	452 lbs
Depth, Door Open 90°	61 1/2"	Condensing Unit Size, HP	3/4	*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at	
Door Opening (in.)	26 13/16" x 52 9/16"	Refrigerant*	R-290		
No. Of Doors/Shelves	1/5	Capacity (BTU/HR) (100°F/-20°F)	1927		
		Heat Rejection (BTU/HR)	2890.5	time of order.	
		Charge (lbs/grams/ounces)	0.2204 / 100 / 3.53		

3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev. 2/12/25 Printed in the U.S.A.

