



RM-45-SD-HC

Glass Door Merchandiser with Sliding Doors



RM-45-SD-HC
05/04/26
Item # 13541

W x D x H

51" x 29" x 79.5"



RM-45-SD-HC-BLK



RM-45-SD-HC



RM-45-SD-HC-WHT



NSF / ANSI 7



2M75



ENERGY STAR



NATURAL REFRIGERANT



Dimensions / Capacity

Interior Storage Capacity (CF)	38.26 ft ³
Overall Width x Depth	51" x 29"
Height	79.5"
Adjustable Shelves	5 per section
Shelf Dimensions (W x D)	23" x 20.5"
Crated Shipping Weight	520 lbs.
Crated Width x Depth x Height	54" x 32.25" x 84"

Electrical / Refrigeration

Voltage	115/60/1
HACR Breaker	15.0 Amps
Electrical Connection (NEMA)	5-15P
Voltage Range	104-126
Ambient Temp. Range	60° to 86°F
Control Setpoint Range	32° to 39°F
Amperage	6.5
Energy Consumption (kWh/day) @ASHRAE	4.55
Approx. Nominal Compres. BTU/HR (HP)	2032 (1/2HP)
Refrigerant / Charge Amount (oz)	R290 / (3.7oz)

Options

- ☐ Organizer shelf (HS-5293) ☐ 4" Casters (HS-5288)
- ☐ Price tag holder (HS-5294)
- ☐ Epoxy Shelf (HS-5318)

Requires 2 sets of:

Warranty

3 Year - Parts and Labor on entire machine.
5 Year - Parts on Compressor
Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Item #: _____
Project: _____
Qty: _____
AIA#: _____

Features

- ▶ Forced air evaporator for quick temperature pull down
- ▶ Self-closing sliding doors with spring assist and stay-open feature
- ▶ Energy saving hot gas loop on front edge of cabinet helps prevent condensation

- Large glass doors are energy efficient Low-E multi pane glass
- LED illuminated exterior canopy
- Energy efficient vertical LED interior lights illuminate products on display
- Silver painted aluminum exterior with NSF approved white aluminum interior and stainless steel floor
- Environmentally friendly CFC-Free Polyurethane insulation with cyclopentane blowing agent
- (5) white epoxy coated shelves per section with product stops are standard
- Stainless steel shelf clips adjustable in 1/2" increments on anodized aluminum supports
- Locks come standard
- Refrigerant flow is controlled with a capillary tube
- 8 Foot cord and plug
- 2 inch leveling legs standard
- Exterior finish available in silver, white, and black

Capacity:

20 oz. bottles: 560
12 oz. bottles: 1260

Container Qty: 22

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

This equipment is intended for the storage of non-potentially hazardous bottled or canned products only.

Hoshizaki reserves the right to change specifications without notice.



RM-45-SD-HC


Glass Door Merchandiser with Sliding Doors

RM-45-SD-HC


05/04/26

Item # 13541

FRONT VIEW

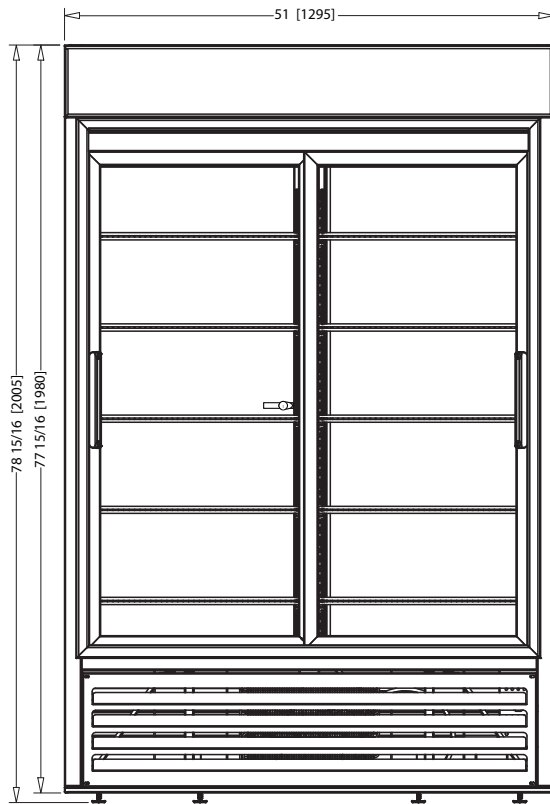


SIDE VIEW

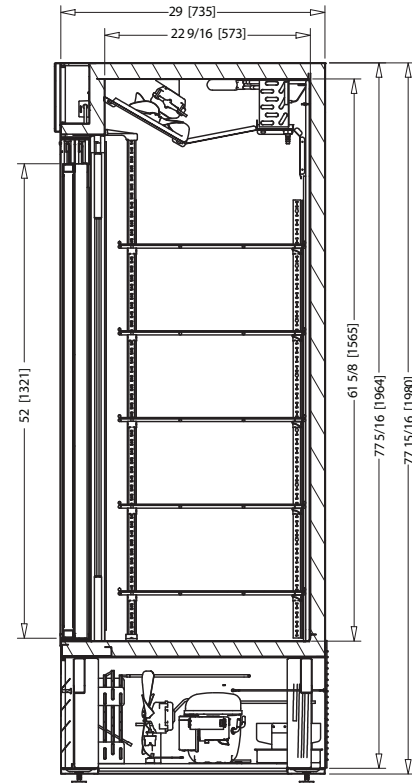


inch [mm]

PLAN VIEW

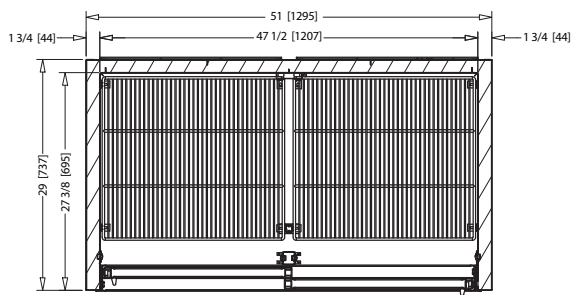

HEADER DIMS

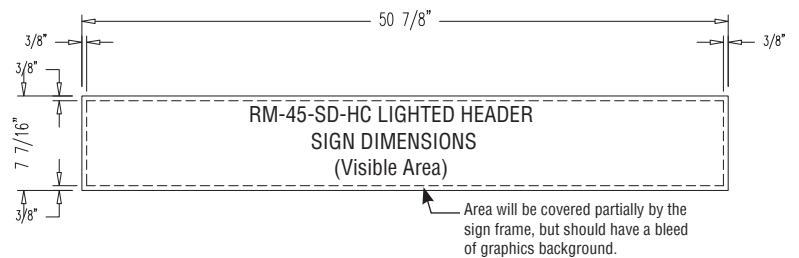

Graphic Requirements:

- 360 dpi resolution. Scale 1=1
- Colors for CMYK process
- Image with 1/4" of excess by side
- Graphics must be saved in photoshop (with layers) (or your sign company file type requirements)
- Include a full color print out

Material Requirements:

- Thickness: 1/16" (1.5mm)
- Good- Acrylic/Pexiglass, Better - high impact acrysteel, acrylite SG
- Best- Super impact Lexan, Lexan SG Polycarbonate

Note: Texts and important parts of the image should be within the visible area.
The visible area is illustrated by dotted lines when it applies.