



Catalogue
FOOD SERVICE
Chapter
COOK & CHILL

Specific model
AW-202-G NG R SW T K 230V 1N 50Hz

12/10/2023

DENOMINATION:

iKORE oven Advance (touch control panel), DirectSteam (injection models) with intelligent washing system for 20 trays GN 2/1, gas heating.

DESCRIPTION :

FUNCTIONS:

- 10.1" glass state of the art touch screen for easy and intuitive operation
 - iCooking: Smart cooking process with automatic adjustment:
 - . Options at the end of the cooking process: maintain temperature, repeat cooking process, etc.
 - . Ability to modify smart cooking processes in progress and adjust parameters at any time
 - Additional functions (regeneration, sous vide, overnight cooking, fermentation, pasteurisation, smoking, charcuterie and dehydration). Smart cooking processes with automatic adjustment
 - iClima:
 - . Humidity management and control by means of direct measurement with a humidity sensor
 - . 1% regulation capacity
 - Fagor Cooking Center:
 - . 200 factory preset and culinary tested recipes
 - . Ability to manage your favourite recipes
 - . Unlimited 9-stage recipe storage capacity
 - Air and water cool-down (rapid cabinet cooling function)
 - Multitray
 - Cooking modes: low temperature steam 30-98°, steam 99°, super steam 100- 130°, mixed 20-300° and convection 20-300°
 - Chamber dehumidification for crispy roasting
 - DeltaT cooking for delicate cooking
- DIRECTSTEAM:**
- Steam generation by injecting water into the turbine, atomising the water and converting it into steam.
- CONTROLS:**
- EasyCooking: option to configure the programmes by password
 - Languages: 36
 - Ability to configure screen tone, volume and contrast
 - Melodies: 8
 - Power, network and language settings
 - Integrated help functions and instruction manual
 - Control and monitoring of the equipment from mobile devices via FagorKonnnect
 - SAT and Trade fair mode
- EQUIPMENT FEATURES:**
- Stop/start function
 - EZ-Sensor. Internal probe with 4 measuring locations
 - Positioning aid for temperature sensor
 - Manual steam injection
 - Automatic dehumidification system
 - Variable humidification with 5 levels
 - 6 programmable air circulation speeds (from 1400 rpm to turbine stop)
 - Option to switch from °C to °F
 - Energy consumption display
 - Display of actual values and selected values
 - Delayed programming
 - JIT (just in time) programming
 - Ability to select 1/2 power

DIMENSIONS

X Width	1162 mm	X Gross width	1180 mm
Y Depth	1074 mm	Y Gross depth	1245 mm
Z Height	1841 mm	Z Gross height	2080 mm
Net Weight	330,0 kg	Gross Weight	397,0 kg
Net volume	2,300 m3	Gross volume	3,056 m3



ELECTRICITY TECHNICAL SPECIFICATIONS

Engine power	1,20 kW
Electric power	1,545 kW
Amperage (A)	12A / 12A
Heating power	0,35 kW
Voltage	220-240V/230V - 1N/2PH
Electric frequency	50Hz

GAS TECHNICAL SPECIFICATIONS

Gas power	65,00 kW
Regulated	NG G20/G25/G25.1 20/25/25 mbar

WATER TECHNICAL SPECIFICATIONS

Pressure	H2O: 200-400kPa(2-4bar)
Water max consumption	30,00 L/h

CONNECTIONS TECHNICAL SPECIFICATIONS

Gas diameter 1	R.3/4"G
Steam exit diameter	53
Air entrance diameter	50
Water inlet diameter	3/4"
Drain 1 diameter	40
SubFamilia	60,00 mm
Extraction 2 diameter	60,00 mm

OTHERS

Door opening	Right
--------------	-------

TECHNICAL FEATURES

Number of trays	20
-----------------	----





Catalogue
FOOD SERVICE
Chapter
COOK & CHILL

Specific model
AW-202-G NG R SW T K 230V 1N 50Hz

12/10/2023

- Automatic adaptation to the characteristics of the installation site (altitude, etc.) including initial self-testing
- Automatic boiling point adjustment
- Removable fan cover
- Integrated turbine brake for increased safety
- HA-Control: bidirectional turbine that provides intelligent even heat distribution
- Auto-reverse system for reversing fan rotation
- Triple-glazed, ventilated cooking chamber door (all except 0623)
- Special heat-reflective coating and hinged inner panes for easy cleaning
- LED lighting in the cooking chamber
- HOLD-OPEN DOOR systems (3 door locking positions for user safety)
- Proximity contact door switch
- Easily replaceable gasket insert
- Interior and outer material: AISI 304 stainless steel (interior mirror polished)

CERTIFICATION AND INSTALLATION SYMBOLS:

- EC declaration of conformity
- EC declaration of gas conformity
- CB safety
- IPX5 protection against splashes and jets of water
- Height adjustable equipment feet (all except 0623)
- Monitor App and maintenance App (self-diagnosis of warnings and errors)
- Logging App:
 - . Cycle history
 - . Error history

FAGORKONNECT:

- Wi-Fi and ETHERNET connection as standard
- Functions when the oven is or not connected to the internet.

WASHING SYSTEM:

- iWashing (environmentally and economically efficient)
- Choice of iWashing Solid or iWashing Liquid smart washing systems
- Washing programmes:
 - . 1 basic cleaning programme (spray)
 - . 3 automatic cleaning programmes
 - . 1 rinsing programme
 - . 1 polishing programme
- Option to activate dirt softening during the cleaning process
- Option to activate drying in the cleaning process
- Indication of cleaning status and remaining time
- Control and monitoring of the cleaning process from mobile devices via FagorKconnect

SPECIFIC OPTIONS :

- ELECTRIC POWER : 230V 1N 50HZ - 202
- FUSE DEFINITION : 201-202 G
- BRAND : FAGOR
- GAS : NG NATURAL GAS
- DOOR OPENING : R RIGHT
- WASHING SYSTEM : SW-IWASHING SOLID
- SHOWER : NO
- TROLLEY : T-TROLLEY 202
- RACK : GN TRAY
- SOUS VIDE & THERMAL PROBE : NO
- CONNECTIVITY : K-WITH IOT CONNECTIVITY
- CERTIFICATION : CE
- REG4: WITH REG4





Catalogue
FOOD SERVICE
Chapter
COOK & CHILL

Specific model
AW-202-G NG R SW T K 230V 1N 50Hz

12/10/2023

POSSIBLE ACCESSORIES :

- CONVERSION KITS
- CLEANING ACCESSORIES
- SPECIFIC FOR 202
- COOKING ACCESSORIES O
- STRUCTURES AND TROLLEYS
- FASTENING KIT
- THERMICAL COVER
- VARIOUS
- KIT BAFFLE







Catalogue
FOOD SERVICE
Chapter
COOK & CHILL

Specific model
AW-202-G NG R SW T K 230V 1N 50Hz

12/10/2023

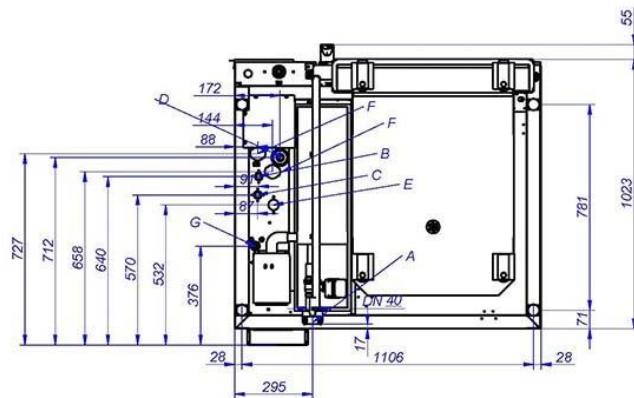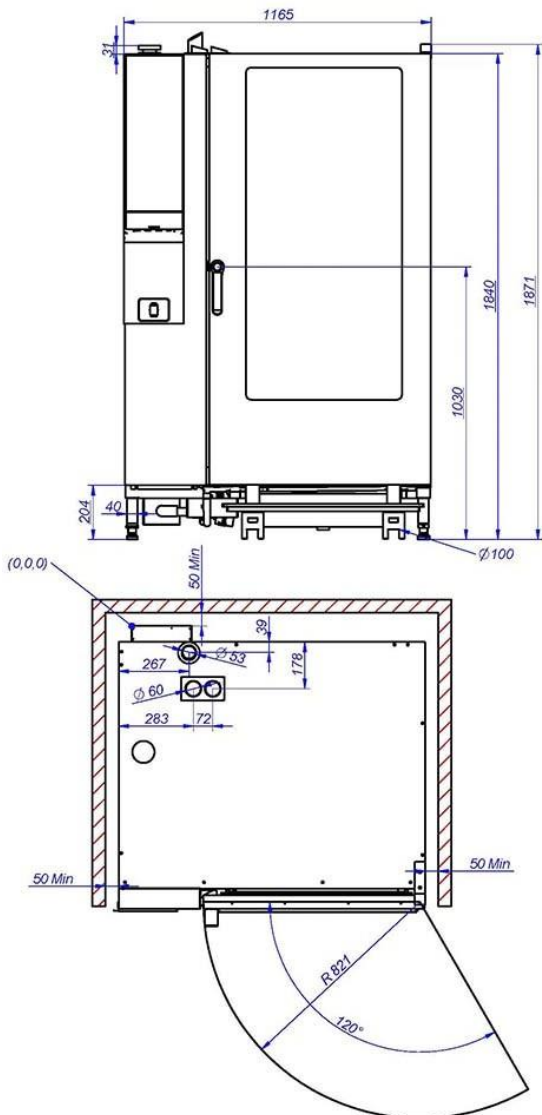

- A: DRAIN CONNECTION DN40
- B: SOFT WATER CONNECTION
- C: COLD WATER CONNECTION
- D: ELECTRICAL SUPPLY
- E: GAS INLET
- F: AIR
- G: ETHERNET