

Threaded Stem

- Double Ball Bearing Raceway for Long Wear and Added Strength
- Zinc Plated
- Raceway Dust Cover

APPLICATIONS

- Wire Shelf Carts
- Bakery Equipment
- Food Service Operations
- Displays
- Maintenance Carts
- Office Equipment

3/4"-10 x 1" Threaded Stem Oven Caster

- 3/4"-10 x 1" Threaded Stem
- 5" Phenolic Wheel Resistant to Oil & Grease
- Temperature Range -50° to 250°F
- With or Without Top Lock Brake
- 350# Weight Cap. per Caster
- Caster Kit of (4)
- * Fits Southbend® & Garland® G-Series



Part #	Description
5SBR-9ST-PH-4	Caster Kit Includes: (2) 5" Phenolic Wheel Casters (2) 5" Phenolic Wheel w/ Top Lock Brake Casters

NEW 1/2"-13 x 1" Threaded Stem Equipment Caster

- 1/2"-13 x 1" Threaded Stem
- 2.5" Polyolefin Wheel Resistant to Chemicals & Solvents
- Temperature Range -45° to 180°F
- Twist Lock Brake
- 220# Weight Cap. per Caster
- Caster Kit of (4) in POP Box
- * Fits True® Refrigerators



Part #	Description
25SBR-4ST-LDP-PS4	(4) 2.5" Polyolefin Wheel Casters w/ Twist Lock Brake

NEW 1/2"-13 x 3/4" Threaded Stem Equipment Caster

- 1/2"-13 x 3/4" Threaded Stem
- 3" Polyolefin Wheel Resistant to Chemicals & Solvents
- Temperature Range -45° to 180°F
- Top Lock Brake
- 220# Weight Cap. per Caster
- Caster Kit of (4) in POP Box



Part #	Description
3SBR-15ST-LDP-PS4	(4) 3" Polyolefin Wheel Casters w/ Top Lock Brake

* This product is not manufactured or associated with any other manufacturer, and the products under that registered trade name or mark are not owned, associated or to be confused with BK Resources.

Pop In Stem

- Fits 1" O.D. Tubing
- Double Ball Bearing Raceway for Long Wear and Added Strength
- Zinc Plated
- Raceway Dust Cover

APPLICATIONS

- Wire Shelf Carts
- Bakery Equipment
- Food Service Operations
- Displays
- Maintenance Carts
- Office Equipment




Polyurethane Wheel

- Resistant to Acids & Caustics
- Temperature Range -45° to 180°F



Polyolefin Wheel

- Resistant to Chemicals & Solvents
- Temperature Range -45° to 180°F

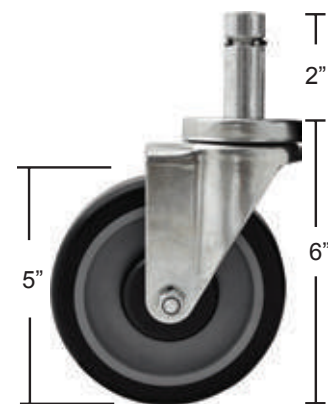

Part #	Description	Weight Capacity
5SBR-1ST-PLY	5" Polyurethane Wheel Caster	300#
5SBR-1ST-PLY-TLB	5" Polyurethane Wheel Caster w/ Top Lock Brake	300#
5SBR-1ST-LDP	5" Polyolefin Wheel Caster	300#
5SBR-1ST-LDP-TLB	5" Polyolefin Wheel Caster w/ Top Lock Brake	300#