

PROJECT:		
ITEM #		OTY:
MODEL#		7
AIA #	SIS #	
AIA !!	. 010 //	

SANDWICH PREP REFRIGERATOR

VSP48HC-12



EXCLUSIVE WARRANTY

- 7 Year Parts, Labor and Compressor
- Exclusive 2 Year Warranty On Magnetic Door Gaskets
- Lifetime Warranty On Handles & Hinges (parts only)









CABINET CONSTRUCTION

- Stainless Steel Exterior (galvanized back and bottom)
- · Aluminum Interior
- · Hinged, Insulated Flat Lift Up Lid
- · One-Piece, Snap-In Magnetic Door Gaskets
- · Heavy-Duty Pan Liner
- · 8' Cord And Plug (see electrical data for details)

FEATURES

- · Full Electronic Control
- · Cartridge Style Hinges
- · Low Profile Horizontal Door Handles
- · Epoxy Coated Shelves (2 per section)
- · Stay-Open Door Feature For Easy Product Loading
- Top Accommodates Up To 6" Deep Food Service Pans With **Locking Divider Bars**
- · 10" Cutting Board Constructed Of White Polyethylene Plastic
- · 6" Casters Two With Brakes

REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Rear Mounted Refrigeration System
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- **Epoxy Coated Evaporator Coil**
- Refrigerator Capable Of Maintaining Product Temperature 36°F To 38°F



Please Verify Qualifying Units By Visiting: www.energystar.gov/cfs

OPTIONS & ACCESSORIES

- · Stainless Steel Interior
- · Stainless Steel Back
- · Door Locks
- · Door Swing Orientation (at time of order)
- · 8 Pan Cover
- · Garnish Rack (full & half pan)

- · Silver Freeze Shelves (chrome style)
- 12" Cross Bar (excludes big top models)
- · Front Or Side Crumb Catcher
- · Roll Top Cover
- · Shelf Divider
- 6" Legs Or 6" Seismic Legs

- · Casters: 3", Roller Kit, Low Profile
- · Correctional Package
- Remote Models* (6" legs only) (refrigerant must be specified at time of order, see note on back on page)

3779 Champion Blvd, Winston-Salem, NC 27105


ph: (888) 845-9800 fax: (800) 253-5168

Rev. 7/1/24 Printed in U.S.A. APPROVAL: __ DATE: _



VSP48HC-12



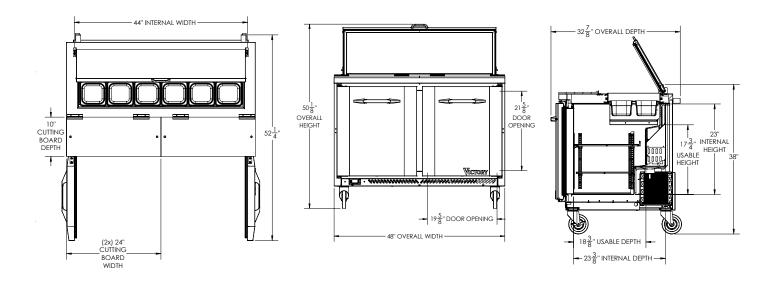

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

2" Bottom & 2" Rear clearance is required

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft.)	13.0	Cabinet Voltage	115/60/1	Height	49"
Width, Overall (in.)	48"	Total Amperes	2.0	Width	51"
Depth, Overall (with handle)	32 7/8"	NEMA Plug (8' cord)	5-15P	Depth	38"
Height Overall (6" casters)	50 1/8"	REFRIGERATION DATA		Crated Weight	330 lbs
Depth, Door Open 90°	52 1/4"	Condensing Unit Size, HP	1/6	*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.	
Door Opening (in.)	19 5/8" x 21 5/8"	Refrigerant*	R-290		
No. Of Doors/Shelves	2/4	Capacity (BTU/HR) (100°F/20°F)	1094		
No. Of Pans	12	Heat Rejection (BTU/HR)	1641		
		Charge (lbs/grams/ounces)	0.243 / 110 / 3.89		

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev. 7/1/24 Printed in U.S.A.

