



## PRODUCT FEATURES



- Deck forced refrigeration
- Canopy LED light
- Integral condenser
- Self evaporating
- 65mm deep full size pan supplied
- Foam insulated double skin base

## GASTRO PANS


Units supplied with 1/1 pans at 65mm deep, max pan depth is 100mm

## ELECTRICAL POWER


Electrical power cord 2200mm  
3 pin 10 amp 1 phase socket required.  
Maximum ambient operation  
temperature climate class N max 32° C.

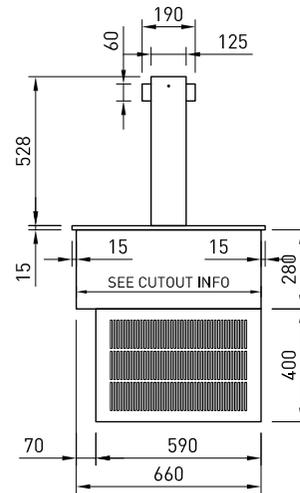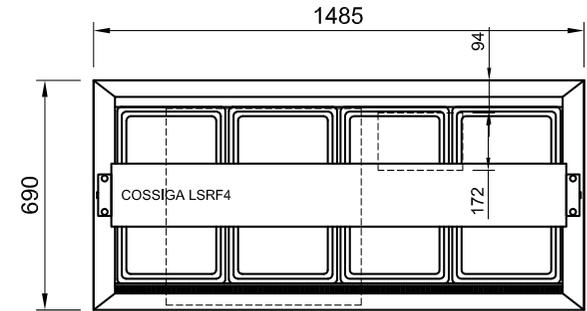

LSRF LEFT SIDE ELEVATION

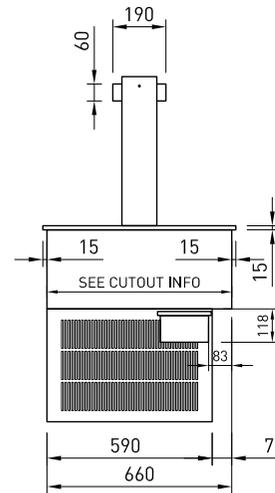

LSRF RIGHT SIDE ELEVATION

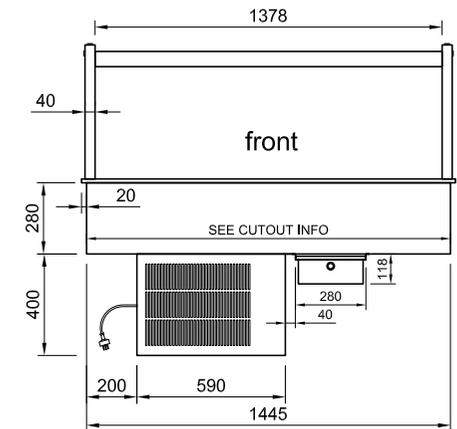

## CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

**\*ASSEMBLY REQUIRED**

MODEL	CABINET				BENCH TOP CUT OUT HOLE SIZE	PANS	TEMP RANGE	REFRIGERANT	FREQUENCY	POWER		CONNECTION ELECTRICAL POWER CORD 3000MM		VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]						KW 230V	AMPS	NZ 10 AMP	UK 13 AMP		LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]
LSRF4	1485	690	555	152	1465x670	4 x 1/1 65mm Gastro Pans	3-8	R290	50 HZ	0.92	4.5	3 PIN PLUG	3 PIN PLUG	220-240V	1590	770	1060	160