

**True Ice Series:**  
Modular Cubed Ice Maker  
**TI-630-MA-S1-A~T-1**



TI-630-MA  
TIB-530

## FEATURES & BENEFITS

### Produces up to 630 lbs. of ice per 24 hours

- Environmentally friendly R290 refrigeration system for optimum ice production and energy efficiency
- 30% below DOE 2018
- 20% below Energy Star

### Superior Sanitation

- TrueZone protection to purify surrounding air in bin and food zone
- TrueGuard Antimicrobial embedded in every plastic piece including bin liners
- Food zone pieces easily removed without tools
- Simple 1-touch cleaning
- Easily removable air filter with RCU technology


### Advanced Control with Touch Screen

- 4.3" front display – largest in the industry
- Simple touch operation
- Advanced diagnostics which allows for predictive and proactive measures
- Built-in alarms & push notifications
- Programmable ice production
- Time of flight ice sensor eliminates the need for bin thermostats

### Remote Monitoring Capabilities

- Remote monitoring with easy back end data access
- Location based performance enhancement
- Remote shut off

## CUBE SIZES

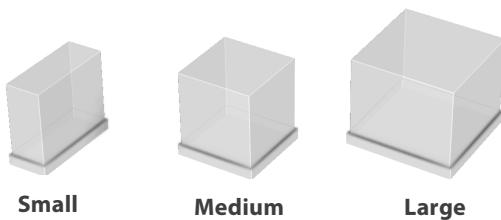

Small

Medium

Large

### Full Ice Cube Dimensions

Full Ice Cube Dimensions	
Small	7/16" x 1-1/8" x 7/8" (11.1 x 28.6 x 22.2 mm)
Medium	7/8" x 7/8" x 7/8" (22.2 x 22.2 x 22.2 mm)
Large	1-1/8" x 1-1/8" x 7/8" (28.6 x 28.6 x 22.2 mm)

### Commercial Ice Maker Warranty

Commercial Ice Maker Warranty	
Ice Maker	3 YEARS parts and labor
Compressor	5 YEARS parts
Evaporator	5 YEARS parts and labor

## ADDITIONAL FEATURES

### Evaporator Plate:

- High performance copper
- No harvest assist necessary
- TrueNcap<sub>su</sub>L<sub>8</sub> Sanitary evaporator fully insulated & sealed for efficiency and cleanliness

### Construction:


- TrueTech aluminum front and sides, all plastic interior and single piece case for both 22" & 30" units

### Refrigeration System:


- Environmentally friendly R290 Refrigerant
- High & low pressure transducers for gauge-free servicing
- Micro channel condenser for superior efficiency
- Wide operating range: 35°F to 110°F ambient
- Ultra quiet fan operation

## AIR COOLED

Please note: air-cooled units require 6" (15.24mm) clearance for air intake and exhaust on the front and back sides.

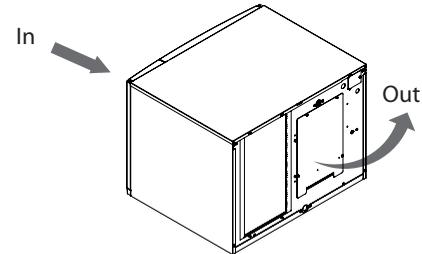

## PLAN VIEW

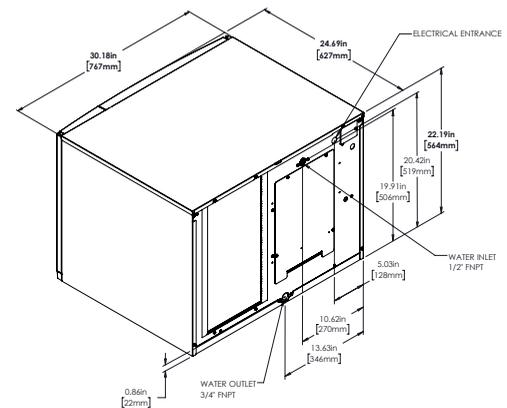

## SPECIFICATIONS

Model	Condenser Type	Refrigerant	@ 70°F air/50°F water	@ 90°F air/70°F water			Peak Heat of Rejection	Min Circuit Ampacity
			Ice Production per 24hr	Ice Production per 24hr	Potable Water Consumption	Electrical Consumption		
TI-630-MA	Air	R290	630 lbs (286 kg)	580 lbs (263 kg)	14.0 gal/100lb	3.8 kWh/100lb	8200 BTU/hr	15

### OPTIONS & ACCESSORIES

### OPERATING REQUIREMENTS

Water Filters			Minimum	Maximum	
Model	Filter System	Replacement Cartridge	Ambient Air Temp:	35°F (1.7°C)	90°F (32.2°C)
TI-630-MA	P/N 841766	P/N 841764	Water Temp:	35°F (1.7°C)	100° (37.8°C)
Water Pressure:			20 psi (138 kPa)	100 psi (689 kPa)	

### CONNECTIONS

### DIMENSIONS

Potable water in:	1/2" Female NPT	W x D x H (in.)	30 x 24 x 22
Water out:	3/4" Female NPT	W x D x H (mm)	762 x 609.6 x 558.8
Hole for electrical connections:	7/8"	*UL EPH for Sanitation	
Electrical connection junction box:	104-127 VAC/60Hz/1		

