

PROJECT: _		
ITEM#		QTY:
MODEL#_		
AIA #	SIS #	

EXTRA WIDE GLASS DOOR REACH-IN FREEZER

FS-1D-S1-EW-G-HC



EXCLUSIVE WARRANTY

- 7 Year Parts, Labor and Compressor
- Exclusive 2 Year Warranty On Magnetic Door Gaskets
- Lifetime Warranty On Handles & Hinges (parts only)







CABINET CONSTRUCTION

- · Stainless Steel Exterior And Interior
- · Stay-Open Door Feature For Easy Product Loading
- · Glass Door
- · LED On/Off Selection Within Controller
- · Heavy-Duty Cylinder Lock
- · One Piece, Snap-In Magnetic Door Gaskets
- · Low Profile Vertical Door Handle
- · Hinged Front Shroud
- Energy Saving Thermal Breaker
- · Stainless Steel Breaker Caps
- 3 Silver Freeze Wire Shelves
- · 6" High Adjustable Stainless Steel Legs
- 8' Cord And Plug (see electrical data for details)

FEATURES

- · Full Electronic Control With Touchpoint Interface
- · Expansion Valve Technology
- · Manager's Lockout Feature
- · Anti-Condensate Perimeter Heater
- Variable Speed Compressor Technology

REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Hot Gas Condensate Evaporator
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- Epoxy Coated Evaporator Coil, Located Out Of The Food Zone
- Freezer Capable Of Maintaining Product Temperature -10°F



Please Verify Qualifying Units By Visiting: www.energystar.gov/cfs

OPTIONS & ACCESSORIES

- · Stainless Steel Case Back
- · Stainless Steel Kick Plate
- Door Swing Orientation (at time of order)
- · Additional Shelves

- · Heat Shield (left, right)
- Tray Slides (type A & A/C)
- 3", 6" Casters Or 6" Seismic Legs
- · Ultra Glass Door (as shown above)
- · FlexTemp Models Maintain Between 28°F And 38°F
- Remote Models* (6" legs only) (refrigerant must be specified at time of order, see note)

3779 Champion Blvd, Winston-Salem, NC 27105

ph: (888) 845-9800 | fax: (800) 253-5168


Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 10/1/24 Printed in U.S.A.	APPROVAL.	DATF:



FS-1D-S1-EW-G-HC



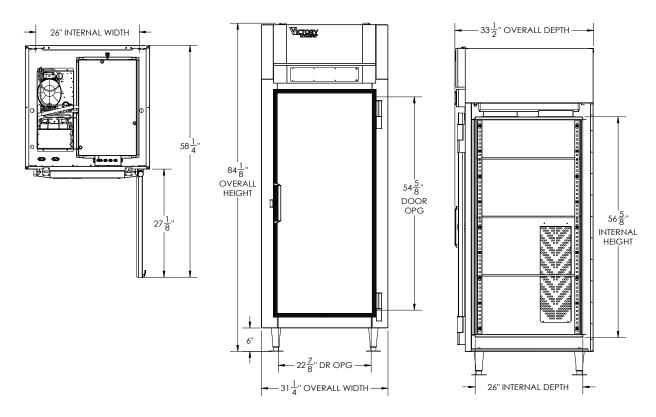

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, $additions \ or \ replacements \ for \ previously \ purchased \ equipment. \ Dimensional \ tolerances \ +/-\ 1/4". \ Metric \ dimensions \ (MM)$

12" Top clearance is required

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft.)	24.08	Cabinet Voltage**	115/60/1	Height	88"
Width, Overall (in.)	31 1/4"	Total Amperes	9.1	Width	39"
Depth, Overall (with handle)	33 1/2"	NEMA Plug (8' cord)	5-15P	Depth	45"
Height Overall (6" legs)	84 1/8"	REFRIGERATION DATA		Crated Weight	454 lbs
Depth, Door Open 90°	58 1/4"	Condensing Unit Size, HP	3/4	*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified	
Door Opening (in.)	22 7/8" x 54 5/8"	Refrigerant*	R-290		
No. Of Doors/Shelves	1/3	Capacity (BTU/HR) (100°F/-20°F)	2450		
		Heat Rejection (BTU/HR)	3675	at time of order.	
		Charge (lbs/grams/ounces)	0.2866 / 130 / 4.59		

^{**} NOTE: This unit utilizes variable speed compressor technology. The compressor can experience nuisance tripping on Class A GFCI outlets which have a trip limit of 4 mA to 6 mA. To avoid this issue in a location that requires GFCI circuit protection, Victory recommends using either an Eaton, SCF20, or HUBBELL Model Number GFRST83W 20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle.

3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168 Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev. 10/1/24 Printed in U.S.A.

