


# FRONT TO BACK DOUBLE HOB

INDUCTION COOKTOP

## NON-TOUCH DISPLAY



HELIOS STANDARD, FREESTANDING

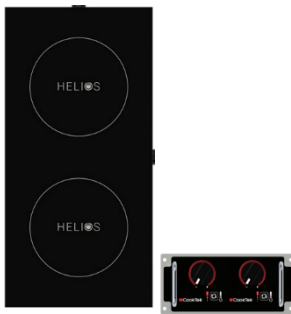

HELIOS STANDARD, DROP-IN

## TOUCH DISPLAY



HELIOS TOUCH, FREESTANDING

## FEATURES

- 2500 and 3500 W models
- Available in 200–240 or 380–415 VAC, single or three phase
- Freestanding or drop-in design with stainless-steel housing
- Front-to-back orientation
- Sloped front panel allows for a freestanding design
- Helios Standard or Helios Touch display options for freestanding design
- High-quality internal electronics and heavy-gauge Litz wire
- Easy-to-clean high-temperature glass-ceramic top
- 4.3-inch display
- Even heat distribution across the bottom of cookware\*
- Temperature ranges from 85–425 °F (29–218 °C)
- Automatic pan detection provides instant energy transfer to cookware
- Automatic shut-off feature prohibits overheating
- Integral grease filter and air baffle maintain cooler, cleaner air intake
- Integral fan to keep internal components cool
- Microprocessors continuously monitor vital components for overheating, power-supply issues, and other conditions

## STANDARD INCLUDED ACCESSORIES


- Two-year advanced replacement warranty (U.S. and Canada)
- Standard Cat 5e or Cat 6 patch cable from unit to control box
- 6-ft (1.8 m) nominal plug and cord




\*Induction cooking requires the use of induction-compatible (i.e., magnetic) cookware.

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to substitute components or change specifications without prior notice.


HELIOS  
STANDARD  
FREESTANDING

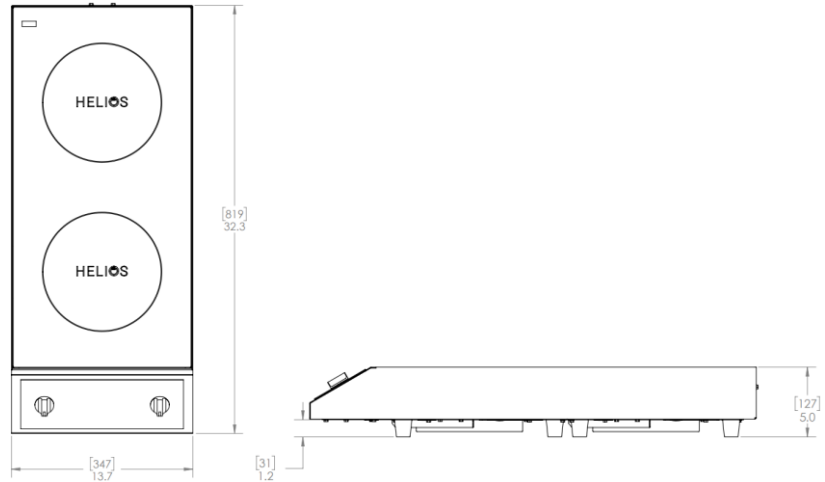

HELIOS  
STANDARD  
DROP-IN

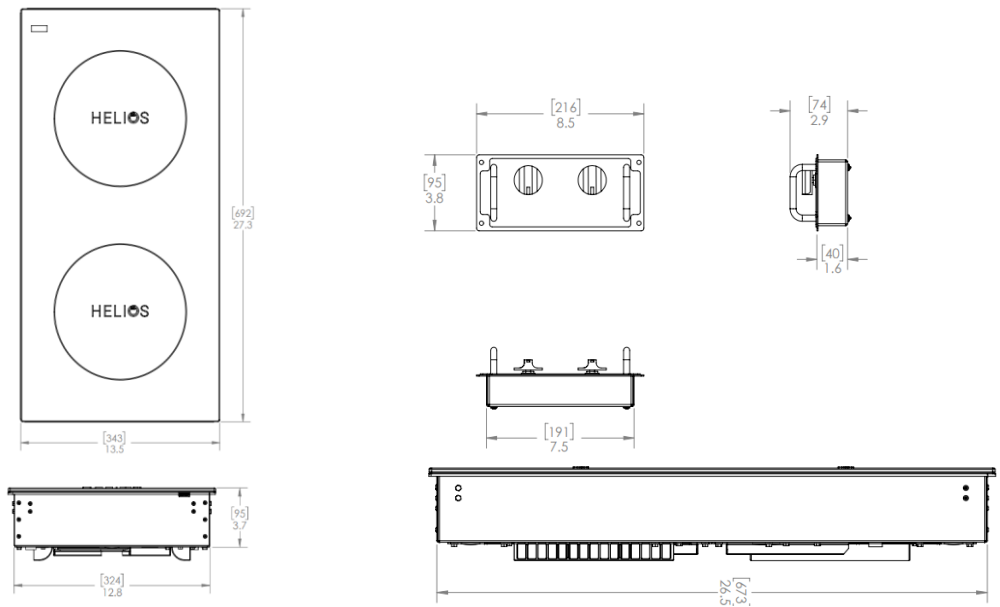

HELIOS TOUCH  
FREESTANDING

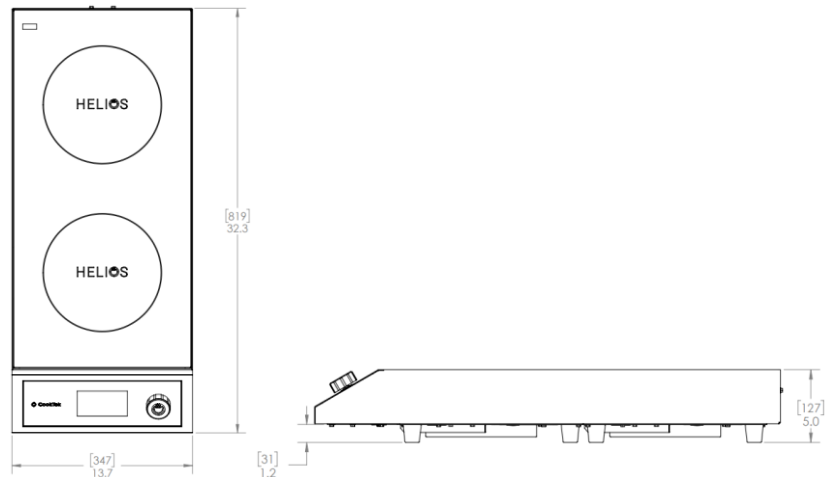

DIMENSIONS - HELIOS STANDARD FREESTANDING		
Full Unit Height	5"	127 mm
Full Unit Width	13.7"	347 mm
Full Unit Depth	32.3"	819 mm
Feet Height	1.2"	31 mm
Weight	31 lb	14 kg
Max Ambient Temperature	122 °F	50 °C

DIMENSIONS - HELIOS STANDARD DROP-IN		
Full Unit Height	3.7"	95 mm
Full Unit Width	13.5"	343 mm
Housing Width	12.8"	324 mm
Full Unit Depth	27.3"	692 mm
Housing Depth	26.5"	673 mm
Cutout Width	13.13"	334 mm
Cutout Depth	26.88"	683 mm
Weight	30 lb	13.6 kg
Max Ambient Temperature	122 °F	50 °C

DIMENSIONS - HELIOS TOUCH FREESTANDING		
Full Unit Height	5"	127 mm
Full Unit Width	13.7"	347 mm
Full Unit Depth	32.3"	819 mm
Feet Height	1.2"	31 mm
Weight	31 lb	14 kg
Max Ambient Temperature	122 °F	50 °C

WALL CLEARANCE*		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm

\*The clearances provided apply to a unit not placed near a heat source. Refer to the owner's manual for clearance requirements if the unit is placed near a heat source.



SHIPPING INFORMATION		
Packaged Height	11"	279 mm
Packaged Width	23"	584 mm
Packaged Depth	32"	813 mm
Packaged Weight	40 lb	18.14 kg
Item Class	250 NMFC #26710	

ELECTRICAL SPECIFICATIONS - SINGLE PHASE HELIOS STANDARD FREESTANDING		
<b>UNITED STATES/CANADA</b>		
HRF-9500-FB25-1	200-240 VAC, 50/60 Hz, 2x2500 W	NEMA 6-30P
HRF-9500-FB35-1	200-240 VAC, 50/60 Hz, 2x3500 W	NEMA 6-50P
<b>UK/MIDDLE EAST</b>		
HRF-9500-FB25-2	200-240 VAC, 50/60 Hz, 2x2500 W	IEC 309, 3-Pin, 32 A, 240 V
HRF-9500-FB35-2	200-240 VAC, 50/60 Hz, 2x3500 W	IEC 309, 3-Pin, 32 A, 240 V
<b>INTERNATIONAL</b>		
HRF-9500-FB25-3	200-240 VAC, 50/60 Hz, 2x2500 W	IEC 309, 3-Pin, 32 A, 240 V
HRF-9500-FB35-3	200-240 VAC, 50/60 Hz, 2x3500 W	IEC 309, 3-Pin, 32 A, 240 V
<b>AUSTRALIA</b>		
HRF-9500-FB25-4	200-240 VAC, 50/60 Hz, 2x2500 W	56PA332, 32 A, 250 V
HRF-9500-FB35-4	200-240 VAC, 50/60 Hz, 2x3500 W	56PA332, 32 A, 250 V
<b>JAPAN</b>		
HRF-9500-FB25-6	200-240 VAC, 50/60 Hz, 2x2500 W	NEMA 6-30P
HRF-9500-FB35-6	200-240 VAC, 50/60 Hz, 2x3500 W	NEMA 6-50P
<b>SOUTH AFRICA</b>		
HRF-9500-FB25-7	200-240 VAC, 50/60 Hz, 2x2500 W	IEC 309, 3-Pin, 32 A, 240 V
HRF-9500-FB35-7	200-240 VAC, 50/60 Hz, 2x3500 W	IEC 309, 3-Pin, 32 A, 240 V
<b>ISRAEL</b>		
HRF-9500-FB25-8	200-240 VAC, 50/60 Hz, 2x2500 W	IEC 309, 3-Pin, 32 A, 240 V
HRF-9500-FB35-8	200-240 VAC, 50/60 Hz, 2x3500 W	IEC 309, 3-Pin, 32 A, 240 V

ELECTRICAL SPECIFICATIONS - SINGLE PHASE HELIOS STANDARD DROP-IN		
<b>UNITED STATES/CANADA</b>		
HRD-9500-FB25-1	200-240 VAC, 50/60 Hz, 2x2500 W	NEMA 6-30P
HRD-9500-FB35-1	200-240 VAC, 50/60 Hz, 2x3500 W	NEMA 6-50P
<b>UK &amp; SAUDI ARABIA</b>		
HRD-9500-FB25-2	200-240 VAC, 50/60 Hz, 2x2500 W	IEC 309, 3-Pin, 32 A, 240 V
HRD-9500-FB35-2	200-240 VAC, 50/60 Hz, 2x3500 W	IEC 309, 3-Pin, 32 A, 240 V

ELECTRICAL SPECIFICATIONS - SINGLE PHASE HELIOS STANDARD DROP-IN		
<b>INTERNATIONAL</b>		
HRD-9500-FB25-3	200-240 VAC, 50/60 Hz, 2x2500 W	IEC 309, 3-Pin, 32 A, 240 V
HRD-9500-FB35-3	200-240 VAC, 50/60 Hz, 2x3500 W	IEC 309, 3-Pin, 32 A, 240 V
<b>AUSTRALIA</b>		
HRD-9500-FB25-4	200-240 VAC, 50/60 Hz, 2x2500 W	56PA332, 32 A, 250 V
HRD-9500-FB35-4	200-240 VAC, 50/60 Hz, 2x3500 W	56PA332, 32 A, 250 V
<b>JAPAN</b>		
HRD-9500-FB25-6	200-240 VAC, 50/60 Hz, 2x2500 W	NEMA 6-30P
HRD-9500-FB35-6	200-240 VAC, 50/60 Hz, 2x3500 W	NEMA 6-50P
<b>SOUTH AFRICA</b>		
HRD-9500-FB25-7	200-240 VAC, 50/60 Hz, 2x2500 W	IEC 309, 3-Pin, 32 A, 240 V
HRD-9500-FB35-7	200-240 VAC, 50/60 Hz, 2x3500 W	IEC 309, 3-Pin, 32 A, 240 V
<b>ISRAEL</b>		
HRD-9500-FB25-8	200-240 VAC, 50/60 Hz, 2x2500 W	IEC 309, 3-Pin, 32 A, 240 V
HRD-9500-FB35-8	200-240 VAC, 50/60 Hz, 2x3500 W	IEC 309, 3-Pin, 32 A, 240 V

ELECTRICAL SPECIFICATIONS - SINGLE PHASE HELIOS TOUCH FREESTANDING		
<b>UNITED STATES/CANADA</b>		
HTF-9500-FB25-1	200-240 VAC, 50/60 Hz, 2x2500W	NEMA 6-30P
HTF-9500-FB35-1	200-240 VAC, 50/60 Hz, 2x3500W	NEMA 6-50P
<b>UK &amp; SAUDI ARABIA</b>		
HTF-9500-FB25-2	200-240 VAC, 50/60 Hz, 2x2500 W	IEC 309, 3-Pin, 32 A, 240 V
HTF-9500-FB35-2	200-240 VAC, 50/60 Hz, 2x3500 W	IEC 309, 3-Pin, 32 A, 240 V
<b>INTERNATIONAL</b>		
HTF-9500-FB25-3	200-240 VAC, 50/60 Hz, 2x2500 W	IEC 309, 3-Pin, 32 A, 240 V
HTF-9500-FB35-3	200-240 VAC, 50/60 Hz, 2x3500 W	IEC 309, 3-Pin, 32 A, 240 V
<b>AUSTRALIA</b>		
HTF-9500-FB25-4	200-240 VAC, 50/60 Hz, 2x2500 W	56PA332, 32 A, 250 V
HTF-9500-FB35-4	200-240 VAC, 50/60 Hz, 2x3500 W	56PA332, 32 A, 250 V
<b>JAPAN</b>		
HTF-9500-FB25-6	200-240 VAC, 50/60 Hz, 2x2500 W	NEMA 6-30P
HTF-9500-FB35-6	200-240 VAC, 50/60 Hz, 2x3500 W	NEMA 6-50P
<b>SOUTH AFRICA</b>		
HTF-9500-FB25-7	200-240 VAC, 50/60 Hz, 2x2500 W	IEC 309, 3-Pin, 32 A, 240 V
HTF-9500-FB35-7	200-240 VAC, 50/60 Hz, 2x3500 W	IEC 309, 3-Pin, 32 A, 240 V
<b>ISRAEL</b>		
HTF-9500-FB25-8	200-240 VAC, 50/60 Hz, 2x2500 W	IEC 309, 3-Pin, 32 A, 240 V

ELECTRICAL SPECIFICATIONS - SINGLE PHASE HELIOS TOUCH FREESTANDING		
HTF-9500-FB35-8	200-240 VAC, 50/60 Hz, 2x3500 W	IEC 309, 3-Pin, 32 A, 240 V

ELECTRICAL SPECIFICATIONS THREE PHASE HELIOS STANDARD FREESTANDING		
<b>UK &amp; SAUDI ARABIA</b>		
HRF-9500-FB25-11	380-415 VAC, 50/60 Hz, 2X2500 W	IEC 309, 5-pin, 16 A
HRF-9500-FB35-11	380-415 VAC, 50/60 Hz, 2X3500 W	IEC 309, 5-pin, 32 A
<b>INTERNATIONAL</b>		
HRF-9500-FB25-12	380-415 VAC, 50/60 Hz, 2X2500 W	IEC 309, 5-pin, 16 A
HRF-9500-FB35-12	380-415 VAC, 50/60 Hz, 2X3500 W	IEC 309, 5-pin, 32 A

ELECTRICAL SPECIFICATIONS THREE PHASE HELIOS STANDARD DROP-IN		
<b>UK &amp; SAUDI ARABIA</b>		
HRD-9500-FB25-11	380-415 VAC, 50/60 Hz, 2X2500 W	IEC 309, 5-pin, 16 A
HRD-9500-FB35-11	380-415 VAC, 50/60 Hz, 2X3500 W	IEC 309, 5-pin, 32 A
<b>INTERNATIONAL</b>		
HRD-9500-FB25-12	380-415 VAC, 50/60 Hz, 2X2500 W	IEC 309, 5-pin, 16 A
HRD-9500-FB35-12	380-415 VAC, 50/60 Hz, 2X3500 W	IEC 309, 5-pin, 32 A

ELECTRICAL SPECIFICATIONS THREE PHASE HELIOS TOUCH FREESTANDING		
<b>UK &amp; SAUDI ARABIA</b>		
HTF-9500-FB25-11	380-415 VAC, 50/60 Hz, 2X2500 W	IEC 309, 5-pin, 16 A
HTF-9500-FB35-11	380-415 VAC, 50/60 Hz, 2X3500 W	IEC 309, 5-pin, 32 A
<b>INTERNATIONAL</b>		
HTF-9500-FB25-12	380-415 VAC, 50/60 Hz, 2X2500 W	IEC 309, 5-pin, 16 A
HTF-9500-FB35-12	380-415 VAC, 50/60 Hz, 2X3500 W	IEC 309, 5-pin, 32 A

⚠️ Dedicated circuit required for each installation