

PRECISE HUMIDITY TEMPERATURE TECHNOLOGY

Insulated – For Various Size Trays

HUMIDITY SET RANGE: 0RH% – 90RH%  TEMP SET RANGE: 90° – 200°F (32° – 93°C) 

CLYMASTE IQ® “PHTT-1826” SERIES

Clymate IQ® tray servers take the guesswork out of holding foods and provide professional results every time

- 1** Heats up quickly - the Clymate IQ® cabinets' intuitive climate control technology reaches the set humidity and temperature up to 25% faster than the competition
- 2** Ultimate control - simple, color coded controls allow you to independently set relative humidity (0-90%) and temperature (90-200°F / 32-93°C). Includes low water and low temperature indicator lights with option to turn on audible alarm
- 3** Stainless steel no-tip tray slides - 18" x 26" trays will not tip even when pulled out halfway - allows for easier "hands-free" access to contents of the cabinet
- 4** Fast Recovery - Clymate IQ® returns to set temperature quickly and features self-closing hinges, so you don't have to worry about losing heat and humidity if you open and close the door repeatedly during peak service times
- 5** Consistency throughout - All Clymate IQ® cabinets feature a unique push/pull air distribution system to provide uniform temperature and humidity on every level, throughout the unit
- 6** Place the unit anywhere - all units come with a tri-directional AC cord pocket to give you a better plug placement
- 7** Narrow spaces are no problem with the slim design of the PHTT-1826 series - these cabinets fit easily into tight spaces without sacrificing needed capacity
- 8** Unmatched ease of cleaning - the exclusive large volume, removable water pan makes clean up a breeze - just pull out the pan and lift up the heating element for easy cleaning

****Two year limited warranty***




(Shown with Optional Accessories Left Hand Door Hinging and Larger Casters)



Control Panel



No-Tip Tray Slides




Push-Pull Air Distribution



Removable Water Pan

SPECIFICATIONS

PRECISE HUMIDITY TEMPERATURE TECHNOLOGY

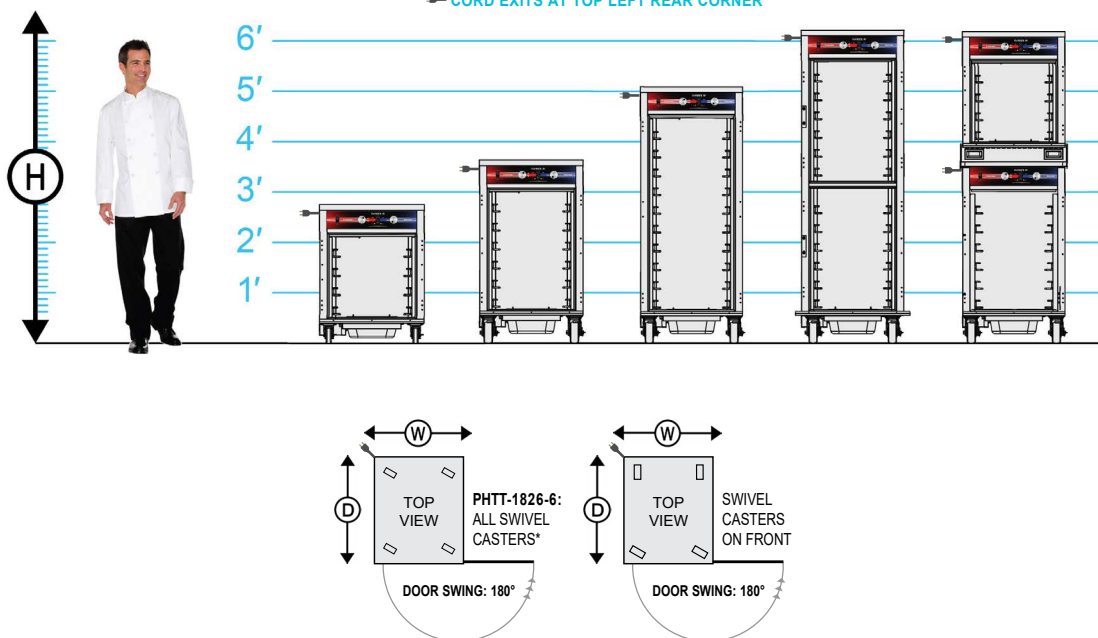

ELECTRICAL DATA			
▼ STANDARD			
VOLTS	120	208	220-240
WATTS	2192	1996	2596
AMPS	18.3	9.6	10.8
HERTZ	60	60	60
PHASE	Single	Single	Single
PLUG USA	5-20P*	6-15P	6-15P
PLUG CANADA	5-30P	6-15P	6-15P

▼ Lowest voltage shown is standard.

*Dedicated circuit. Two dedicated circuits required for the PHTT-1826-6S-9.

CAPACITIES OF TRAYS/PANS: 4.5" (114 mm) Spacings are Standard [A]										CONSULT FACTORY FOR SHIPPING CLASS		
MODEL NUMBER	STANDARD CAPACITY @ 4.5" Spacings (114 mm)			OPTIONAL CAPACITY @ 3" Spacings (76 mm)			OVERALL EXTERIOR DIMENSIONS IN. (mm)			NO. OF DOORS	CASTER SIZE	SHIP WT. LBS. (KG)
	TRAY/PAN SLIDES PROVIDED	18 x 26	14 x 18	18 x 13	TRAY/PAN SLIDES REQUIRED (Additional)	18 x 26	14 x 18	18 x 13	HIGH "H"	DEEP "D"	WIDE "W"	
334	4 pr	4	8	8	6 pr (2 pr)	6	12	12	32.5" (826)	32.5" (826)	24.75" (629)	1 3.5" ALL SWIVEL 260 (118)
	6 pr	6	12	12	9 pr (3 pr)	9	18	18	43.5" (1105)	32.5" (826)	24.75" (629)	1 5" 290 (132)
	10 pr	10	20	20	14 pr (4 pr)	14	28	28	61.5" (1563)	32.5" (826)	24.75" (629)	1 5" 355 (162)
	12 pr	12	24	24	17 pr (5 pr)	17	34	34	75" (1905)	32.5" (826)	24.75" (629)	2 5" 420 (189)
	10 pr	10	20	20	15 pr (5 pr)	15	30	30	74.5" (1893)	32.5" (826)	24.75" (629)	2 5" 500 (267)

[A] Tray slides accommodate (1) 18" x 26", (2) 14" x 18", (2) 18" x 13". Number of tray slides are listed above. Uprights punched on 1.5" (38 mm) centers. Tray slides are adjustable. Standard spacings are 4.5" (114 mm).

PHTT-1826 models are available with: **Pass-thru Door** [add "P"]. Note: Dimensions may change when adding this option.

PHTT-1826-6 is available with: **Stackable Design** [add "S"]

*PHTT-1826-6 is an under counter model provided standard with all swivel casters.

OPTIONAL ELEMENT @ 1500W ELECTRICAL DATA			
▼ STANDARD			
VOLTS	120	208	220-240
WATTS	1692	1551	2001
AMPS	14.1	7.5	8.3
HERTZ	60	60	60
PHASE	Single	Single	Single
PLUG USA	5-15P*	6-15P	6-15P
PLUG CANADA	5-20P	6-15P	6-15P

▼ Lowest voltage shown is standard.

*Dedicated circuit. Two dedicated circuits required for the PHTT-1826-6S-9.

CONSTRUCTION. Heliarc welded, single unit construction of stainless steel; 20 gauge polished exterior, 22 gauge stainless steel interior with easy-to-clean coved corners.

INSULATION. "Ultra-Guard" UG-26 high density fiberglass insulation throughout; top, back, bottom, sides and door(s).

HANDLES. Form grip flush-in-wall hand grips recess mounted on each side of unit.

BUMPERS. Bumper stand offs shall be mounted to rear base to allow for proper air circulation.

DOORS AND LATCHES. Flush mounted, stainless steel insulated doors shall be self closing and field reversible. High temperature gasket sealed; gasket shall be cabinet mounted. Magnetic work flow door handle shall be full length, vertical, and positive closing. PHTT-1826-6 is standard with horizontal work

flow handle. Each door shall have two (2) heavy-duty edgmount die cast hinges. PHTT-1826-17 shall be standard with dutch doors. Dutch door: two (2) half size doors.

CASTERS. Maintenance free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake. PHTT-1826-6 shall have a caster configuration of four (4) swivel with brake. Casters shall have a reinforced yoke mounted to 10 gauge caster plate.

TRAY SLIDES. Welded rod-style no-tilt tray slides are stainless steel for greater durability and sanitation. Fully adjustable / removable and designed to give secure bottom tray support. Removable stainless steel uprights shall be punched on 1.5" (38mm) spacings, on center, for easy tray adjustment, and shall easily lift off heavy-duty stainless steel brackets without the use of tools for cleaning.

PHTT SYSTEM/CONTROLS. Built in humidified holding system shall include two (2) separate long life Incoloy nickel-chromium alloy heating elements per cavity to provide separate, adjustable, precise temperature from 90°F to 200°F (32°C to 93°C) and maintain food texture with settings from 0 to 90% RH (Crisp to Moist). Patented Precise Humidity Temperature Technology controls shall be provided for each function. One to control the interior air temperature, and one to control the interior air moisture with hydro immersion water bath. Stainless steel water reservoir shall be removable for ease of cleaning/sanitization. Built-in drip trough has removable drain plug. System shall have circulating fan to assist heat recovery/moist air distribution. Controls shall be up-front, recessed and eye-level for convenience and safety. ON/OFF power switch, humidity cycle light and thermostat cycling light shall also be included.

ELECTRICAL CHARACTERISTICS. 3 wire grounded tri-directional power cord and plug, rear mounted for safety. See electrical data chart above for amperage and receptacle configuration. See electrical data chart for models that may require a dedicated circuit.

INSTALLATION. Unit should not be installed in an area where adverse environmental conditions are present.

ELECTRICAL
220 volt, 50/60 Hz single phase
15 Amp plug

DOORS
Key locking door latch
Paddle latch
Left hand door hinging
Glass doors

Flip-up lexan doors
Pass-thru doors
Magnetic edgmount latch

SPACINGS
Extra stainless steel tray slides
Fixed rack
Shelves

CASTERS
All swivel casters
Larger casters
Legs

EXTRAS
Full extension bumper
Heavy-duty push/pull handles
Top or bottom corner bumpers (set of 4)

Auto water fill
Extended top (full size models)
X-factor frame (consult factory)