



Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
AUN-22G LC C CI 230V 1N 50Hz

19097880

23/01/2024

DENOMINATION:

Freezer cabinet - Advance Gastronorm with 2 compartments and 2 doors, at 50Hz.

DESCRIPTION :

- Interior and exterior completely built with AISI-304 stainless steel.
 - 80 mm, 40 kg/m³ injected polyurethane insulation.
 - Embedded inner tray slides. Storage trays at 24 different levels 55 mm from each other.
 - Forced draught cooling system.
 - Copper piping and aluminium flaps evaporator.
 - HACCP system that keeps running logs.
 - Digital display for electronic and digital control of temperature and defrosting.
 - Acoustic and visual alarm connected to three sensors at strategic spots. They provide a total control and block the compressor in case of dirt or failure.
 - Opened door delay alarm.
 - Self-closing and stay open doors. When opened less than 90° they close by themselves. When opened more than 135° they stay open.
 - Built-in drainage to get rid of waste liquids inside the unit.
 - Embedded bottom and curved panels inside for easy cleaning and maintenance.
 - Height adjustable stainless steel legs.
 - Working temperature: from 0 °C to +8 °C (refrigerators) and from -18 °C to -22 °C (freezers).
 - Tested in climatic class V.
 - Inner LED lights with power switch (now also in freezing units).
- Freezer cabinet
Visibility: vertical LED light for greater visibility.

POSSIBLE OPTIONS :

- Stainless Backing
- Legs instead of castors
- Pedal

STANDARD OPTIONS :

- Door frame resistance
- HACCP alarm
- Locks
- Castors
- UK plug

POSSIBLE ACCESSORIES :


- REFRIGERATION
- ACCESSORIES
- GASTRONORM GRIDS

SUPPLIED ACCESSORIES:

- 12037936 Guide for grill GN-1/1 - wall - 562 mm - 1 piece 6
- 12037958 GN-2/1 GRID made in Epoxi (650x530) 6

DIMENSIONS

X Width	1358 mm	X Gross width	1460 mm
Y Depth	856 mm	Y Gross depth	880 mm
Z Height	2106 mm	Z Gross height	2185 mm
Net Weight	227,0 kg	Gross Weight	240,0 kg
Net volume	2,371 m ³	Gross volume	2,750 m ³



ELECTRICITY TECHNICAL SPECIFICATIONS

Amperage (A)	4,3 A
Electric frequency	50Hz
Electric power	0,749 kW
Voltage	230V - 1N

GAS TECHNICAL SPECIFICATIONS

Gas type	R-290
----------	-------

COLD TECHNICAL SPECIFICATIONS

Annual elec. consumption	4599,00 kWh
Clasif. Energy efficiency	D
Climate class	4
Cooling gas load	150,000 g
Energy Efficiency Index	74,44 %
Frozen net.vol	955 L
Gross internal volume	1332 L
Model Type	Vertical cabinet
Power consumption 24h	12,60 kWh
Refrigeration power	0,907 kW

CONNECTIONS TECHNICAL SPECIFICATIONS

Single-phase 230V wiring	2X1,5+T-2A
--------------------------	------------

OTHERS

Condensation system	Vent.
---------------------	-------









Catalogue
FOOD SERVICE
Chapter
REFRIGERATION



Specific model
AUN-22G LC C CI 230V 1N 50Hz

19097880



23/01/2024

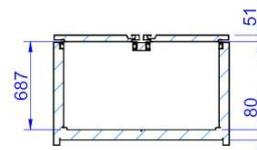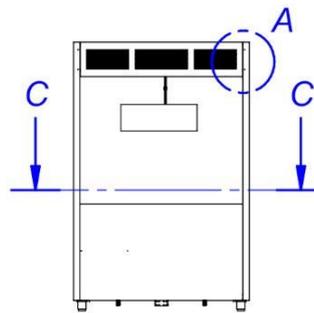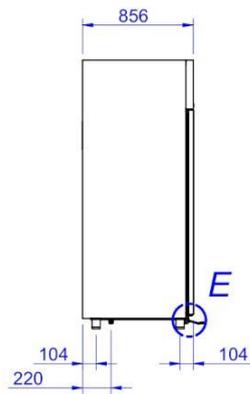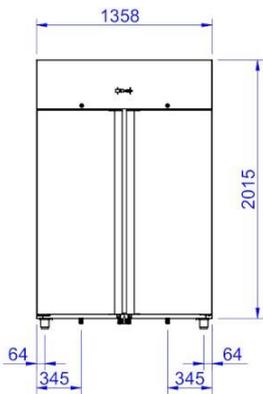


SECTION C-C

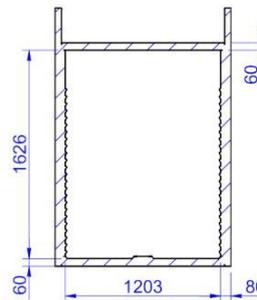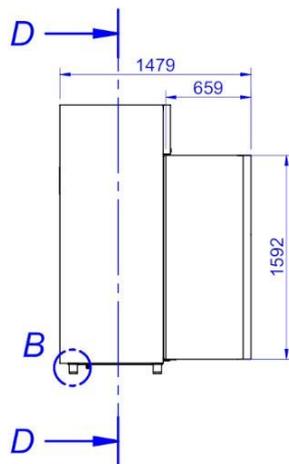


SECTION D-D




A
ELECT.



"R" OPTION



80<X<115



E
"PD" OPTION