# **CAMBRO**

## Camshelving® Ultimate Sheet Pan Racks

Full Size Racks 3" (7,6 cm) Rail Spacing Hold 20 each 18 x 26 or 40 each 13 x 18 Sheet Pans

Full Size Racks 1½" (3,8 cm) Rail Spacing

Hold 40 each 18 x 26 or 80 each 13 x 18 Sheet Pans

#### **Features & Benefits**

- Mobile, multi-purpose, end load racks for holding, storing and transporting 18 x 26 or 13 x 18 Sheet Pans and 14 x 18 Meal Delivery Trays. Ideal for use in commercial and non-commercial kitchens.
- Moves easily between freezer (plastic caster units only), cooler and proofer, and holds hot pans from 350°F (177°C) oven.
- Choose from 3" (7,6 cm) or 1½" (3,8 cm) rail spacing. Wide rail spacing
  offers greatest versatility and ease of use. Narrow rail spacing best for
  high volume baking or cooking.
- Sheet pan holding capacity:
  - $-1\frac{1}{2}$ " (3,8 cm) Rail Spacing: 40 each 18 x 26 or 80 each 13 x 18
  - 3" (7,6 cm) Rail Spacing: 20 each 18 x 26 or 40 each 13 x 18
- Unit weight bearing capacity is 350 lbs (159 kg). Weight bearing per rail set is 55 lbs (25 kg).
- Made from highly durable, 100% composite plastic material components with lifetime warranty against rust and corrosion. Easy to wipe clean. No metal, crossbars, screws or welds.
- Molded-in rails are bottom load only and feature unique raised ribs for quicker cooling and thawing.
- Positioning ribs on each rail end are slightly raised to keep sheet pans/trays centered.
- Top frame features molded in supports to hold a single 18 x 26 Sheet Pan flat to protect rack contents below.
- · Caster options:
  - Four each 5" (12,7 cm) custom metal (zinc plated) swivel casters with center stem design for improved stability and maneuverability over uneven surfaces. Non-marking polyurethane wheel. 2 with brake, 2 without brake. Not intended for use in freezers.
  - Four each 5" (12,7 cm) premium plastic swivel casters with total locking brake that locks both swivel and wheel. Nonmarking thermoplastic rubber wheel. Rust and corrosion free.
- Ships knockdown with minimal assembly required or 100% factory assembled.
- Components are easy to remove and replace if damaged, ensuring a lifetime of service.
- Accessories include Vinyl or Insulated Cover and select Camtrays®.
- Available in 1 color only Brushed Graphite (580).

Project

Item No.

Model No.

Quantity





UPR1826FP40 with 1½" (3,8 cm) Rail Spacing and Plastic Casters



UPR1826F20 with 3" (7,6 cm) Rail Spacing and Metal Casters

#### **Approvals**






## Camshelving® Ultimate Sheet Pan Racks

## Full Size Racks 3" (7,6 cm) Rail Spacing

Hold 20 each 18 x 26 or 40 each 13 x 18 Sheet Pans

Hold 40 each 18 x 26 or 80 each 13 x 18 Sheet Pans

Full Size Racks 1½" (3,8 cm) Rail Spacing



33.38"


33%"

(81,4 cm) (84,8 cm)

Metal **Plastic** Casters Casters 25.44" 25.5" 25½" 257/16" (64,8 cm) (64,6 cm)

Model No.

Quantity

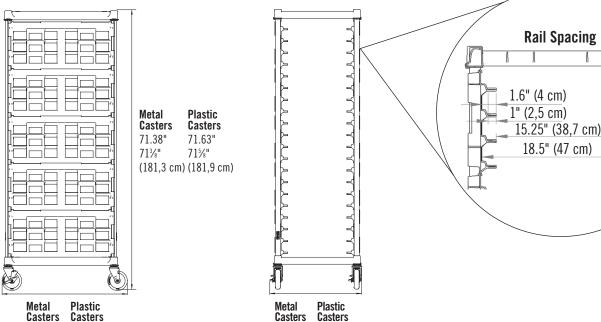

## **Specifications**

## With 3" (7,6 cm) Rail Spacing

32.06"

321/16"

Model	Caster Type	Dimensions (L x W x H)	Unit Weight	Ships
UPR1826F20	Metal	32.06" x 25.5" x 71.38" (81,4 x 64,8 x 181,3 cm)	50.19 lbs (22,8 kg)	Knockdown
UPR1826FA20	Metal	32.06" x 25.5" x 71.38" (81,4 x 64,8 x 181,3 cm)	50.19 lbs (22,8 kg)	Factory Assembled
UPR1826FP20	Plastic	33.38" x 25.4" x 71.63" (84,8 x 64,6 x 181,9 cm)	45.15 lbs (20,5 kg)	Knockdown
UPR1826FPA20	Plastic	33.38" x 25.4" x 71.63" (84,8 x 64,6 x 181,9 cm)	45.15 lbs (20,5 kg)	Factory Assembled
With 1.5" (3,8 cm) Rail Spacing				
Model	Caster Type	Dimensions (L x W x H)	Unit Weight	Ships
UPR1826F40	Metal	32.06" x 25.5" x 71.38" (81,4 x 64,8 x 181,3 cm)	60.54 lbs (27,5 kg)	Knockdown
UPR1826FA40	Metal	32.06" x 25.5" x 71.38" (81,4 x 64,8 x 181,3 cm)	60.54 lbs (27,5 kg)	Factory Assembled
UPR1826FP40	Plastic	33.38" x 25.4" x 71.63" (84,8 x 64,6 x 181,9 cm)	55.60 lbs (25,3 kg)	Knockdown

33.38" x 25.4" x 71.63"

(84,8 x 64,6 x 181,9 cm)

## **Architect Specs**

UPR1826FPA40

Mobile Posts: Proprietary non-corrosive composite material.

Post Connector Frames: Reinforced nylon.

Rail Panels: Reinforced polypropylene.

Post Connector Frame Wedges: Reinforced polypropylene.

Casters: Zinc plated frame with centered metal stem, non-marking polyurethane wheel with brake or no brake. Plastic nylon frame with metal stem, non-marking thermoplastic rubber wheel with total locking brake to stop motion and swivel.

Printed in USA. 11/18

**Plastic** 





**Approvals** 

55.60 lbs (25,3 kg)

Factory Assembled