

ELECTRIC FRY TOP PLATE 2/3 SMOOTH 1/3 GROOVEDAISI 430 TOP

Project:
Rev:
Zone:
Location:



CODICE
CR0998369

MODELLO
D96/10TFTEA1/3R

SERIE
DIAMANTE90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200. Wide range of accessories.

TECHNICAL SPECIFICATIONS

A 10-mm inclination of the plates towards the front of the machine allows optimal grease outflow to the grease tray.

Plate welded to the hob that provides a larger cooking zone and eliminates dirt accumulation areas.

Plate with armoured incoloy heating elements placed under the bottom for cooking with temperature uniformity.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

ELECTRIC FRY TOP PLATE 2/3 SMOOTH 1/3 GROOVEDAISI 430 TOP

Project:
Rev:
Zone:
Location:



CODICE
CR0998369

MODELLO
D96/10TFTEA1/3R

SERIE
DIAMANTE90

Technical Information

| SPECIFICATION | DATA |
|---------------|-----------|
| MATERIAL | CR0998369 |

ELECTRIC FRY TOP PLATE 2/3 SMOOTH 1/3 GROOVEDAISI 430 TOP

Project:
Rev:
Zone:
Location:




CODICE
CR0998369

MODELLO
D96/10TFTEA1/3R

SERIE
DIAMANTE90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

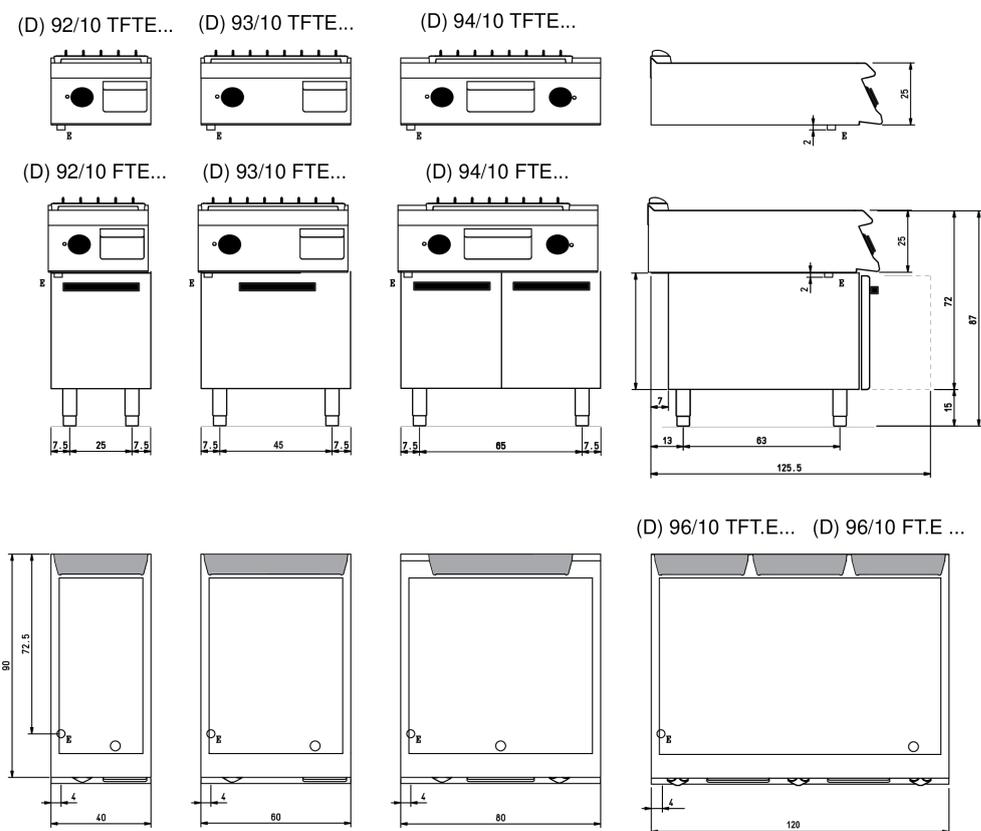

Legenda - Legende - Key - Légende - Leyenda - Legenda

- E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief
Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel

ELECTRIC FRY TOP PLATE 2/3 SMOOTH 1/3 GROOVEDAISI 430 TOP

Project:
Rev:
Zone:
Location:



CODICE
CR0998369

MODELLO
D96/10TFTEA1/3R

SERIE
DIAMANTE90

Product's PLUS

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



A 10-mm inclination of the plates towards the front of the machine allows optimal grease outflow to the grease tray.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



Plate welded to the hob that provides a larger cooking zone and eliminates dirt accumulation areas.



Predisposition for core probe, for even greater cooking control. Reaching the set core temperature is signalled by an acoustic signal

ELECTRIC FRY TOP PLATE 2/3 SMOOTH 1/3 GROOVEDAISI 430 TOP

Project:
Rev.:
Zone:
Location:



CODICE
CR0998369

MODELLO
D96/10TFTEA1/3R

SERIE
DIAMANTE90

ACCESSORIES

| CODE | MODELLO | DESCRIZIONE |
|------------|----------|--------------------------------------|
| CR0957610 | 90XFTP12 | |
| CR0592079 | NXFTC4 | Fry top cleaning drawer M40-M120 |
| CR0592089 | NXFTC6/8 | Fry top cleaning drawer M60-M80-M120 |
| CR0592060 | NXFTT | |
| CR1355489 | D96/10B | Open base 120cm series 90 |
| CR0996979 | DBVP4 | |
| CR0997009 | DBVPA4 | |
| CR0997029 | DAPC | |
| CR0997019 | DAPD | |
| CR0997039 | DAPS | |
| CR0997049 | DAPM | |
| CR0997059 | DAPDB | |
| CR1353589 | DBVC4 | |
| CR0592809 | ZF12 | |
| CR0592830 | ZG | |
| CR0592820 | 9ZL | |
| MA97432000 | R | |
| MA97433000 | RI | |
| CR0592869 | PZM | |
| CR0593580 | 9PT | |
| CR0592879 | KPA | |