

ALL-STOVE GAS COOKER ON COMPARTMENT WITH TWO BURNERS ON RIGHT SIDE

Project:
Rev.:
Zone:
Location:



CODICE
CR0995569

MODELLO
D96/10CTGDX

SERIE
DIAMANTE90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200. Wide range of accessories.

TECHNICAL SPECIFICATIONS

Cast iron centre plate and ring.
Steel burner controlled by thermocouple safety valve.
Piezoelectric ignition with liquid-protected push button.
Adjustable temperature on the plate from 50° to 450°C.
Thermocouple safety valves with pilot flame.

Thick top plate with removable centre ring.

A single high-efficiency central burner that results in differentiated heat zones on the floor with a concentration of maximum heat in the centre and decreasing temperatures in the peripheral zones.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

ALL-STOVE GAS COOKER ON COMPARTMENT WITH TWO BURNERS ON RIGHT SIDE

Project:
Rev:
Zone:
Location:



CODICE
CR0995569

MODELLO
D96/10CTGDX

SERIE
DIAMANTE90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0995569
DEFINITION	D96/10 CTGDX ALLPLATE G.V.G.2F DX
COMMERCIAL LINE	DIAMANTE
SUPPLY	GAS
DIM. WIDTH	1200 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	164,700 Kg
VOLUME (net)	0,940
PACKAGE LENGTH	1250,000 mm
PACKAGE WIDTH	1160,000 mm
PACKAGING HEIGHT	1020,000 mm
PACKAGE VOLUME	1,479 m3
GROSS PACKING WEIGHT	183,000 Kg
GAS POWER	24,50
GAS POWER (G25.3/25mbar)	22,50
CERTIFIED MODEL	D96/10 CTGDX

ALL-STOVE GAS COOKER ON COMPARTMENT WITH TWO BURNERS ON RIGHT SIDE

Project:
 Rev.:
 Zone:
 Location:


CODICE
CR0995569

MODELLO
D96/10CTGDX

SERIE
DIAMANTE90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
 MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

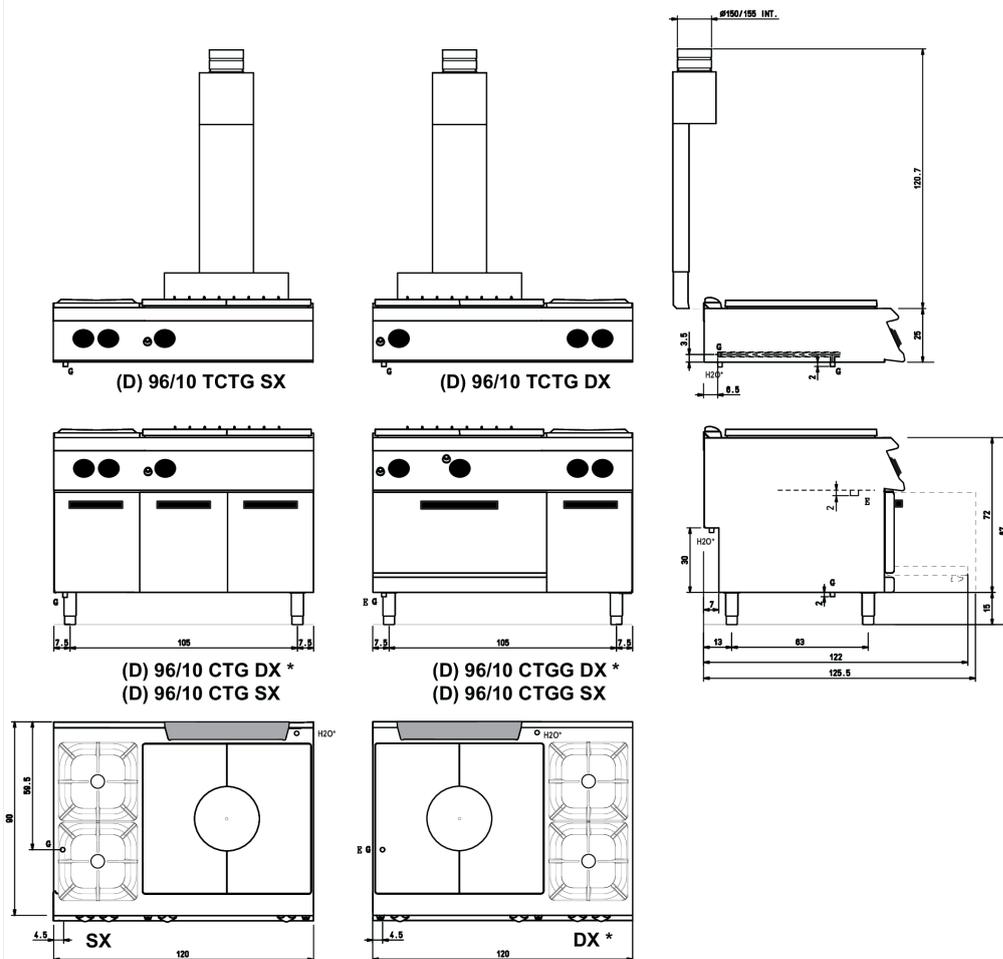

Legenda - Legende - Key - Légende - Leyenda - Legenda

- E** Pressacavo entrata linea elettrica - Stopfbuchse
 Electric cable stress relief - Presse étoupe de câble él
 Pisacable - Elektrische kabelwartel
- G** Attacco arrivo gas - Gasanschluss - Gas connection
 Arrivée gaz - Union de gas - Gasaansluiting
EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
- H2O*** Attacco arrivo acqua - Wasseranschluss - Water inlet
 Arrivée eau - Union de agua - Wateraansluiting
EN ISO 228-1 G 3/4

ALL-STOVE GAS COOKER ON COMPARTMENT WITH TWO BURNERS ON RIGHT SIDE

Project:
Rev:
Zone:
Location:




CODICE
CR0995569

MODELLO
D96/10CTGDX

SERIE
DIAMANTE90

Product's PLUS

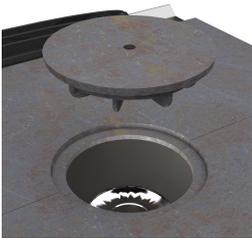

Thick top plate with removable centre ring.



A single high-efficiency central burner that results in differentiated heat zones on the floor with a concentration of maximum heat in the centre and decreasing temperatures in the peripheral zones.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

ALL-STOVE GAS COOKER ON COMPARTMENT WITH TWO BURNERS ON RIGHT SIDE

Project:
Rev:
Zone:
Location:



CODICE
CR0995569

MODELLO
D96/10CTGDX

SERIE
DIAMANTE90

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR0996979	DBVP4	
CR0997009	DBVPA4	
CR0997029	DAPC	
CR0997019	DAPD	
CR0997039	DAPS	
CR0997049	DAPM	
CR0997059	DAPDB	
CR1353589	DBVC4	
CR0592809	ZF12	
CR0592830	ZG	
CR0592820	9ZL	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	
CR0592940	9CAT *	Water column for top equipment