# VF1A-FS

One Section Full Solid Door Freezer



















One Section

VF1A-FS

#### **Dimensions / Capacity**

Interior Storage Capacity (CF) (AHAM)	19.07 ft <sup>3</sup>
Overall Width x Depth	26.88" x 32.00"
Height (including 4" casters)	81.70"
Door Opening (W x H)	22.25" x 52.31"
Depth with Door Open at 90°	57.87"
Adjustable Shelves	3
Shelf Dimensions (W x D)	21.56" x 24.88"
Crated Shipping Weight	310 lbs
Crated Length x Depth x Height	33.50" x 28.75" x 83.88"
	One Section

Crated Length x Depth x Height	33.50" x 28.75" x 83.88"
Electrical / Refrigeration Voltage	One Section VF1A-FS 115/60/1
HACR Breaker	15.0 Amps
Electrical Connection (NEMA)	5-15P 🐧
Voltage Range	103-127
Ambient Temp. Range	45° to 100°F
Control Setpoint Range	-4° to 4°F
Amperage	4.1
Energy Consumption (kWh/day) @ASHRAE	3.89
Appox. Nominal Compres. BTU/HR (HP)	1115
Refrigerant / Charge Amount (oz.)	R290 / (3oz)

### Warranty

3 Year - labor on entire machine 4 Year - parts on entire machine 5 Year - parts on Compressor

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

## VALIANCE. by 10 HOSHIZAKI

VF1A-FS 05/12/25 Item # 13734

Item #:	
Project:	
Qty:	
AIA#:	


## **FEATURES**


- Rear-Ducted Air-Flow ensures even cooling throughout entire cabinet
- Energy efficient interior LED light
- · Environmentally friendly R290 hydrocarbon refrigerant
- Fits full size tray pans
- 3, 4, 5 Warranty
- Stay-open door(s) is field reversible no kit needed
- Cabinet and doors are insulated with 2 5/16" of CFC free, foamed in place polyurethane
- Stainless steel exterior door(s) come standard with lock(s)
- Stainless steel interior floor with aluminum sides, rear, and top
- Time or temperature initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section
- Standard with 4" casters (two with brakes)
- 9 ft. cord and plug
- Container Qty: 44

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle



FRONT VIEW SIDE VIEW

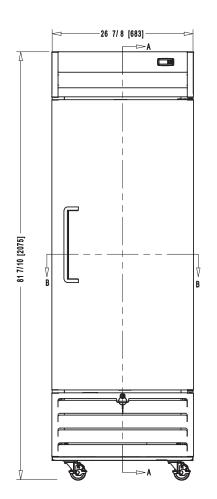

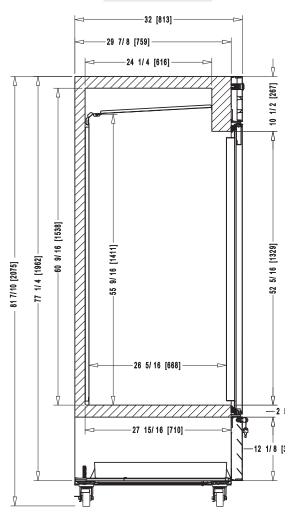

### **PLAN VIEW**

