VF2A-FS

Two Section Full Solid Door Freezer

VALIANCE.

VF2A-FS 05/12/25 Item #13736

by (I) HOSHIZAKI

WxDxH 54.31" x 32.00" x 81.70" (including 4" casters)















Two Section

VF2A-FS



Dimensions / Capacity Interior Storage Capacity (CF) (AHAM) Overall Width x Depth

42.45 ft³ 54.31" x 32.00" Height (including 4" casters) 81.70" 22.63" x 52.31" Door Opening (W x H) 57.5" Depth with Door Open at 90° **Adjustable Shelves** 6 Shelf Dimensions (W x D) 23.94" x 25.16" **Crated Shipping Weight** 543 lbs Crated Length x Depth x Height 58" x 33.5" x 83.88"

3	
Electrical / Refrigeration Voltage	Two Section VF2A-FS 115/60/1
HACR Breaker	15.0 Amps
Electrical Connection (NEMA)	5-15P (i)
Voltage Range	103-127
Ambient Temp. Range	45° to 100°F
Control Setpoint Range	-10° to 0°F
Amperage	4.6
Energy Consumption (kWh/day) @ASHRAE	6.94
Appox. Nominal Compres. BTU/HR (HP)	1718(1/2HP)
Refrigerant / Charge Amount (oz.)	R290 / (4.2oz)

Warranty

3 Year - labor on entire machine 4 Year - parts on entire machine 5 Year - parts on Compressor

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Item #:
Project:
Qty:
AIA#:


FEATURES


- · Rear-Ducted Air-Flow ensures even cooling throughout entire cabinet
- Energy efficient interior LED light
- Environmentally friendly R290 hydrocarbon refrigerant
- · Fits full size tray pans
- 3, 4, 5 Warranty
- Stay-open door(s) is field reversible no kit needed
- Stainless steel exterior door(s) come standard with lock(s)
- Stainless steel interior floor with aluminum sides, rear,
- Time or temperature initiated automatic defrost
- · Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section
- Standard with 4" casters (three with brakes)
- 9 ft. cord and plug
- · Cabinet Qty: 22

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle



FRONT VIEW SIDE VIEW

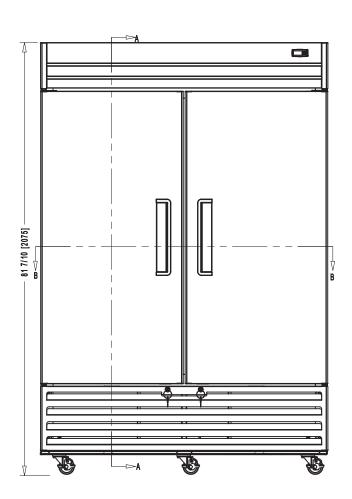

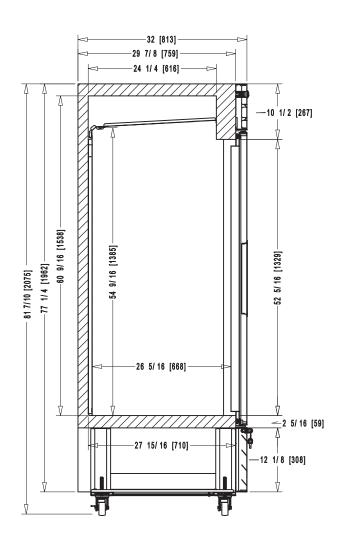

PLAN VIEW

