




solo per professionisti

Sirman Spa
Viale dell'industria 9/11
35010 Pieve di Curtarolo (PD) Italy
Tel. +39 049 9698666
Fax. +39 049 9698688
E-mail. info@sirman.com

CANOVA 300

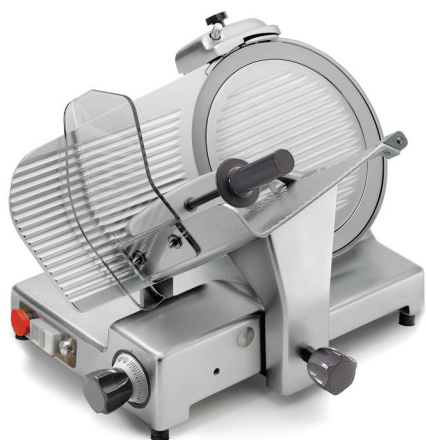

- Rounded design and no sharp edges and visible screws
- Chrome plated and ground slide rod.
- Self lubricating slide rod bushings.
- Vulcanized rubber stops on carriage.
- Removable support cover for thickness gauge plate.
- Stainless steel slice deflector with bayonet fitting
- Stainless steel screws and fittings.
- Enclosed and sealed belt pulley.
- 41 mm distance between blade and motor.
- Bottom cover.
- Built in sharpening tool with bottom protection.
- Standard blade removal tool.
- 38° blade inclination
- Plastic knob.
- Controls IP 44.

DETAILS






Remarkable clearance between blade and machine body



Large hopper

TECHNICAL DATA



Model

ø blade

Motor

Cut thickness

Run of carriage

Hopper

A

B

C

D

E

F

G

X

Y

H

W

Net weight

Shipping

CANOVA 300

mm 300 - inch. 12

watt 210 - Hp 0,29

mm 20

mm 275

mm 240x230

mm 428

mm 290

mm 590

mm 495

mm 355

mm 640

mm 495

mm 230

mm 175

mm 220

mm 200

kg 26,5

mm 800x600x520