ELECTRIC

COUNTERTOP | GRIDDLES



ITG-48-E

MODEL NUMBERS

ITG-24-E
ITG-36-E*
ITG-48-E*
ITG-60-E*
ITG-72-E*

ELECTRIC ELEMENT

- Thermostat maintains selected temperature during peak hours.
- 4 KW serpentine elements located under entire griddle plate.
- Maximum temperature is 550°




ELEMENTS LOCATED DIRECTLY UNDER GRIDDLE PLATE FOR EVEN HEATING.

GRIDDLE PLATE

- Thick, highly polished steel plate holds temperature and has a quick recovery.
- Full 24" (610 mm) plate depth for more cooking surface.
- Surface is ideal for a large range of menu items.
- Optional chrome griddle top is available as an option.

GREASE MAINTENANCE

- Stainless steel grease gutter is 4" (102 mm) wide.
- Large 1 gal (3.8 L) capacity grease can has a weep hole to indicate when full.
- Grease can removes easily.

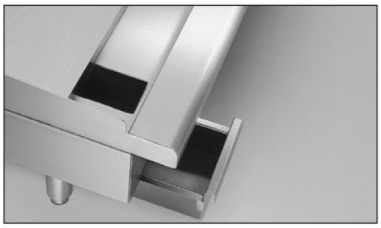

STAINLESS STEEL GREASE GUTTER AND 1 GAL (3.8 L) GREASE CAN.

EXTERIOR FEATURES

- Stainless steel front, sides, splash guard, and ledge.
- Stainless steel ledge is one piece rolled for cleaning convenience.
- Range match profile when placed on a refrigerated base or equipment stand.
- Control knobs are constructed of virtually unbreakable plastic.
- 4" (102 mm) stainless steel legs are included.
- One year parts and labor warranty.


* Items ITG-36-E; ITG-48-E; ITG-60-E and ITG-72-E are ENERGY STAR® certified.


1128 Sherborn Street | Corona, CA 92879 | 800.343.7790 | imperialrange.com | imperialsales@imperialrange.com


©2026 Imperial Commercial Cooking Equipment Imperial reserves the right to change specifications at any time without prior notice and without any obligation for past or future equipment purchases. Visit www.imperialrange.com for specification updates

ELECTRIC

COUNTERTOP | GRIDDLES

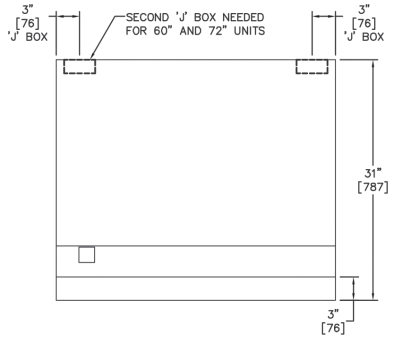

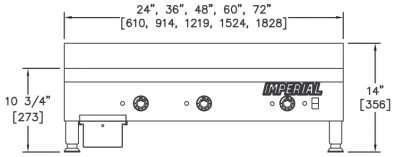



MODEL	WIDTH INCHES (MM)	NUMBER OF ELEMENTS	SHIP WEIGHT (KG) LBS	GRIDDLE PLATE DIMENSIONS	DIMENSIONS	CRATED DIMENSIONS
ITG-24-E	24" (610)	2	(136) 300	24"W X 24"D (610 X 610 MM)	24"W X 31"D X 14"H (610 X 787 X 356 MM)	26½"W X 36"D X 16-½"H (673 X 914 X 419 MM)
ITG-36-E*	36" (914)	3	(195) 430	36"W X 24"D (914 X 610 MM)	36"W X 31"D X 14"H (914 X 787 X 356 MM)	38½"W X 35"D X 16-½"H (978 X 914 X 419 MM)
ITG-48-E*	48" (1219)	4	(261) 575	48"W X 24"D (1219 X 610 MM)	48"W X 31"D X 14"H (1219 X 787 X 356 MM)	50½"W X 35"D X 16-½"H (1283 X 914 X 419 MM)
ITG-60-E*	60" (1524)	5	(328) 725	60"W X 24"D (1524 X 610 MM)	60"W X 31"D X 14"H (1524 X 787 X 356 MM)	62½"W X 35"D X 16-½"H (1588 X 914 X 419 MM)
ITG-72-E*	72" (1829)	6	(396) 875	72"W X 24"D (1829 X 610 MM)	72"W X 31"D X 14"H (1829 X 787 X 356 MM)	74½"W X 35"D X 16-½"H (1892 X 914 X 419 MM)

ELECTRICAL REQUIREMENTS

AMPERAGE REQUIREMENTS				
MODEL	TOTAL KW	VOLTS	PH	AMPS
ITG-24-E	8	208	1	39
		208	3	34
		240	1	33
		240	3	29
		480*	3	15
ITG-36-E*	12	208	1	58
		208	3	34
		240	1	50
		240	3	29
		480*	3	15
ITG-48-E*	16	208	1	77
		208	3	67
		240	1	67
		240	3	58
		480*	3	29

MODEL	TOTAL KW	VOLTS	PHASE	AMPS	
				J BOX A	J BOX B
ITG-60-E*	20	208	1	58	39
		208	3	34	34
		240	1	50	33
		240	3	29	29
		480*	3	15	15
ITG-72-E*	24	208	1	58	58
		208	3	34	34
		240	1	50	50
		240	3	29	29
		480*	3	15	15

Notes: Measurements in () are metric equivalents.

*Additional charge

Must specify at ordering.

OPTIONS AND ACCESSORIES

- Stainless steel equipment stands
- 6" (152 mm) casters for equipment stands
- 5" (127 mm) deep, stainless steel front landing ledge
- 7" (178 mm) deep, stainless steel front landing ledge
- Chrome griddle top, (add "-CG" to model number)
- Extra grease can

CLEARANCE REQUIREMENTS

For use only on non-combustible surfaces. Provide 0" clearance from non-combustible surfaces and 6" (152 mm) from combustible surfaces.

MADE IN USA

IMPERIAL

1128 Sherborn Street | Corona, CA 92879 | 800.343.7790 | imperialrange.com | imperialsales@imperialrange.com

©2026 Imperial Commercial Cooking Equipment Imperial reserves the right to change specifications at any time without prior notice and without any obligation for past or future equipment purchases. Visit www.imperialrange.com for specification updates