R-SERIES

2-SECTION SOLID DOOR REACH-IN REFRIGERATOR

Project Name:	Location:		AIA #:
Item #:	Qty:	Model #:	SIS #:


R-SERIES - STAINLESS STEEL EXTERIOR & INTERIOR




Dynamic Response Refrigeration

Shown on optional 6" casters

PLAN VIEW

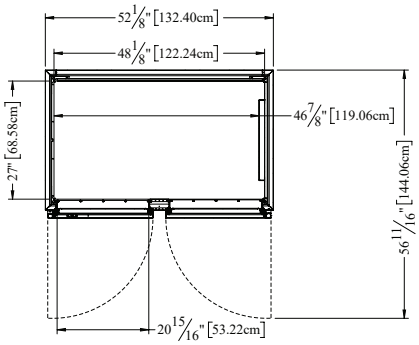


TOP VIEW

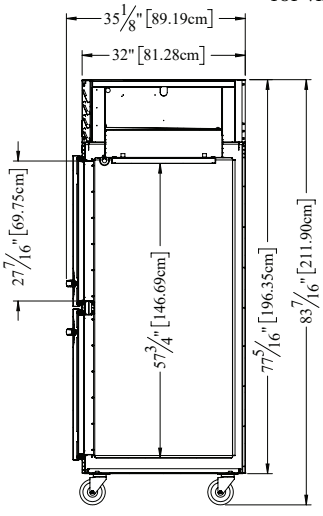

SIDE VIEW

RHT232NUT-HHS

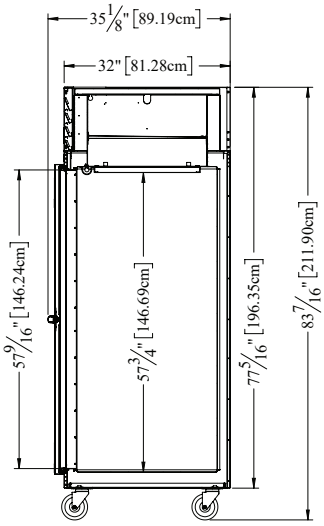

SIDE VIEW

RHT232NUT-FHS

SPECIFICATIONS

DIMENSIONAL DATA	
Capacity cu. ft.	46 (1303.1 L)
Length in.	52-1/8 (132.4 cm)
Overall Depth in.	35-1/8 (89.2 cm)
Overall Height in.[2]	83-7/16 (211.9 cm)
ELECTRICAL DATA	
Horsepower[1]	1/2
Amps	7.6
Voltage	115/60/1
NEMA	5-15P
REFRIGERATION DATA	
Refrigerant	R-290
Charge Amount oz.	4.8 (136 g)
BTU/HR	2875

When ordering please specify:
Voltage, Hinging, and Options

NEMA 5-15P

1. Based on 90°F ambient & 20°F evaporator.
2. 12" top clearance preferred for optimum performance & service access.
*For additional voltage options contact factory.

Intertek Intertek

6-YEAR PARTS & LABOR
7-YEAR COMPRESSOR

Models listed to applicable UL, CSA, and NSF standards by an approved NRTL. Consult the factory or unit data plate for additional information.

Specifications subject to change without notice. Chart dimensions are rounded up to the nearest 1/16" (centimeters rounded up to the nearest tenth).

ENERGY STAR® Listed Commercial Refrigerator
For full listing visit energystar.gov

2026 © Traulsen • 4401 Blue Mound Road | Fort Worth, TX 76106 • 1 (800) 825-8220 • www.traulsen.com

R-SERIES

2-SECTION SOLID DOOR REACH-IN REFRIGERATOR

Project Name:	Location:		AIA #:
Item #:	Qty:	Model #:	SIS #:

ELEVATED PERFORMANCE

• Dynamic Response Refrigeration™: A coordinated system that combines the multi-patented Smart Control™ platform with Predictive Defrost™, a Thermostatic Expansion Valve, and a Variable-Speed Compressor to optimize temperature stability, recovery, and efficiency. The system adapts to workload demands to minimize downtime, while delivering critical alerts, power-loss tracking, and recovery data to support food safety.

• StayClear™ Condenser Coil: Front-facing, wide-fin design resists grease and debris buildup to ensure continuous airflow, improve efficiency, and extend compressor life

• Load-Sure™ Guard: Side-mounted air duct that protects proper airflow and facilitates proper product loading

• EZ-Clean™ Door Gaskets: Magnetic, snap-in design with chemical resistance and a single-channel profile that exposes debris for faster, more effective cleaning

• EZ-Clean Tray Racks (option): One-piece, stainless-steel design simplifies cleaning. Lightweight and fully removable for fast sanitation. Includes (2) pairs per section; available in 5, 6, 7, or 9 levels. Each level accommodates:

• (1) 18" × 26" pan
• (2) 14" × 18" pans
• (2) 12" × 20" pans

REFRIGERATION SYSTEM

• Self-contained, top-mounted system uses minimal GWP R-290 refrigerant

• System operates at 34-38°F (1.1-3.3°C) to maintain consistent, food-safe temperatures

• High humidity evaporator coil located outside the food zone; complete electro-deposition coating on coil

CABINET CONSTRUCTION

• Stainless steel exterior and interior

• Exterior top and bottom is constructed of heavy gauge galvanized steel

• Cabinet is insulated with an average of 2" (5.1 cm) thick high density, non-CFC foamed-in-place polyurethane

• A set of (4) 6" (15.2 cm) high adjustable legs

• 9' cord & plug provided

DOORS

• Removable, plug cylinder locks

• Guaranteed for life cam-lift hinges

• Guaranteed for life metal workflow door handles

• Doors are self-closing with a stay-open feature

• Door hinges include a concealed switch that automatically activate interior LED lighting

FACTORY-INSTALLED INTERIORS

• (3) adjustable, coated wire shelves per section supported on shelf pins

FACTORY-INSTALLED OPTIONS

• Stainless steel finished back with rear louvers

• Stainless steel banking strip

• Electrical box relocation

• #1 Type trayslides — Accommodate (1) 18" x 26" pan or (2) 14" x 18" pans; adjustable to 2" O.C.

• #4 Type trayslides — Accommodate up to (19) 18" x 26" pans

• Universal Type Trayslides — Accommodate (1) 18" x 26" pans, (2) 14" 20" pans, or (2) 12" x 20" pans; (4) pairs per half section

• Additional coated wire or optional stainless steel shelves

• Locking hasps (padlocks by others)

• Optional 208-230/115/60/1 or 208-230/60/1 voltage

• Kool Klad™ exterior laminate

• Set of (4) 4-1/8" (10.5 cm) casters; (2) with brakes, (2) without brakes

• Set of (4) 6" (15.2 cm) casters; (2) with brakes, (2) without brakes

• Set of (4) 6" (15.2 cm) flanged legs

• 4-1/2" high base; for use with standard legs

• 6" high kickplate; for use with standard legs

• Heat shield

• Remote application available; consult factory

WARRANTY

• Six-year parts and labor warranty

• Seven-year compressor parts warranty

Approved by:	**Approved by:**	**Date:**

2026 © Traulsen • 4401 Blue Mound Road | Fort Worth, TX 76106 • 1 (800) 825-8220 • www.traulsen.com