





Self-contained ice maker - Sprayer system Daily production up to 54 kg

Hotel
Restaurant
Fast food
Bar
Disco
Fish market
Supermarket
Medical & SPA
Industry

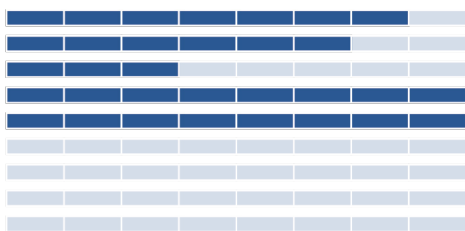

► Features

- High melt resistance & clear cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Adjustable Stainless Steel feet
- Removable and cleanable air filter
- Air cooled (water cooled option available)
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Standard voltages
- HFC Free - R290 Refrigerant
- Automatic Washing system
- Internal drain pump



Green-Tech Design



Side openings for better ventilation




Double water inlet (W models only)



Plug-in electrical connection

► Available ice cube size



Cube 23 grams
dimensions H 31.5 x L 32.5

► Prod. 24h

	Air temp.		Water temp.		kg	lbs
°C	10°C	50°F	7°C	45°F	54	119
	21°C	70°F	15°F	60°F	48	106

2 Years Warranty
subject to limitations

► Certifications available for this model






B48/25A HC DP



Self-contained ice maker - Sprayer system Daily production up to 54 kg

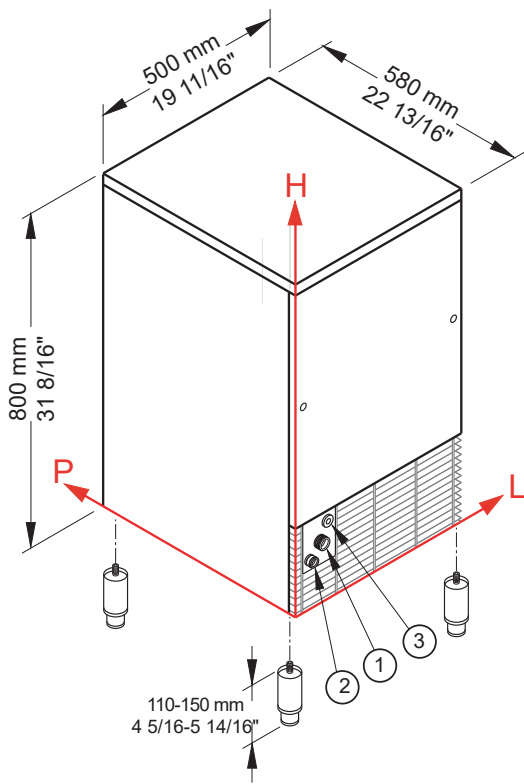

► Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	54 kg					
	50° F		119 lbs				
	21° C			48 kg			
	70° F				106 lbs		
	32° C					44 kg	
	90° F						97 lbs

► Connections

All measurements are referenced from the rear bottom-left corner (L-H-Ø)

- ① Water in.: 130 mm / 5 2/16" - 95 mm / 3 12/16" - 3/4"
- ② Water out.: 56 mm / 2 3/16" - 155 mm / 6 2/16" - 24 mm / 15/16"
- ③ Electrical connections: 95 mm / 3 12/16" - 225 mm / 8 14/16"

► Technical information

Production in 24h	48 kg / 106 lbs
Store capacity, up to	25 kg / 55 lbs
Cooling system	A
Kind of cube	23g
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	450 W
Fuse	10 A
Electrical consumption	28 kWh/100kg

All the technical information must be considered at the following conditions:

Sizes without feet

Standard Cube (23 g)

Ambient temperature +21° C

Water temperature +15° C

Electrical consumption at +32° C (standard voltage)

Average power consumption at +43° C (standard voltage)

Water consumption	A: 3 l/kg - 35,9 gal/100 lbs
	W: 15 l/kg - 179,7 gal/100 lbs
Sizes (L-P-H mm)	500 - 580 - 800
(L-P-H in)	19 9/16 - 23 5/16 - 31 6/16
Sizes with pack (L-P-H mm)	550 - 660 - 970
(L-P-H in)	21 10/16 - 26 - 38 3/16
Net weight	46 kg / 101 lbs
Gross weight	54 kg / 119 lbs
Finish	AISI 304 stainless steel, scotch brite

Models and specifications are subject to change without notice

Rev. 02 - Issued June 2025



www.maidaid.co.uk

sales@maidaid-halcyon.co.uk

03457 308070