

Project:	
Model #:	
Item #:	
Available W/H:	Qty:
Approval:	
AIA #:	SIS #:
CSI Section 11400	

Convection Oven

Model : BTCO-5



*Actual product may differ from photo

≡ FEATURES & BENEFITS ≡

- Prestigious exterior design**
 An exterior design that fits well in open-type kitchen elevating the ambience of the bakery.
- Hot air and steam**
 Motor and propeller generate even flow of air inside the oven to enable even colorization of product.
- Door switch cutoff for fan – thermal heat reflecting double glass doors**
- Precise temperature control**
 Sensitive to room temperature and actual temperature of oven.
- Stacking option**
 Additional (1) oven stacking available.
- Menu saving function**
- Reverse circulation heating function**
- 60 minute timer**
 Flashing timer that signals heating time has started and is running.
- Stainless steel interior and exterior**
- Fully insulated, completely sealed**
- 4 speed bi-directional fan (optional)**
 - 13.2" fan is standard
 - 100%, 80%, 60%, 40% of maximum speed when including option.



Model	Capacity	Tray Size (inches)	Length (inches)	Depth (inches)	Height (inches)	Net Weight (lbs.)
BTCO-5	5 trays	16 x 24	31-5/8"(802mm)	38-13/16(985mm)	25-3/16(640mm)	331

Convection Oven


Model : BTCO-5

MODEL	BTCO-5
Exterior Dimension (L x D x H) (in.)	31 ⁵ / ₈ x 38 ¹³ / ₁₆ x 25 ³ / ₁₆ (802mm x 985mm x 640mm)
Capacity	5 trays + optional pan pack
Oven Voltage	220V, 3PH, 8kW, 60Hz, 21A (single oven)
Wire Gauge	AWG11
Tray Size (in.)	16 x 24
Steam	Available at 302°
Preset menu	5
Temperature Range	90°F – 536°F
Water Feed Pipe	3-3/16" ball valve
Net Weight (lbs.)	331

Design and specifications subject to change without notice. Most updated spec sheets are available at www.gkradiance.com.
Actual shipping weight may differ due to extra packing materials for product protection.
Extra lead time will apply, please call factory for more details to order.

■ **WARRANTY : 1 Year Parts and Labor Warranty**

PLAN VIEW (unit : inch)

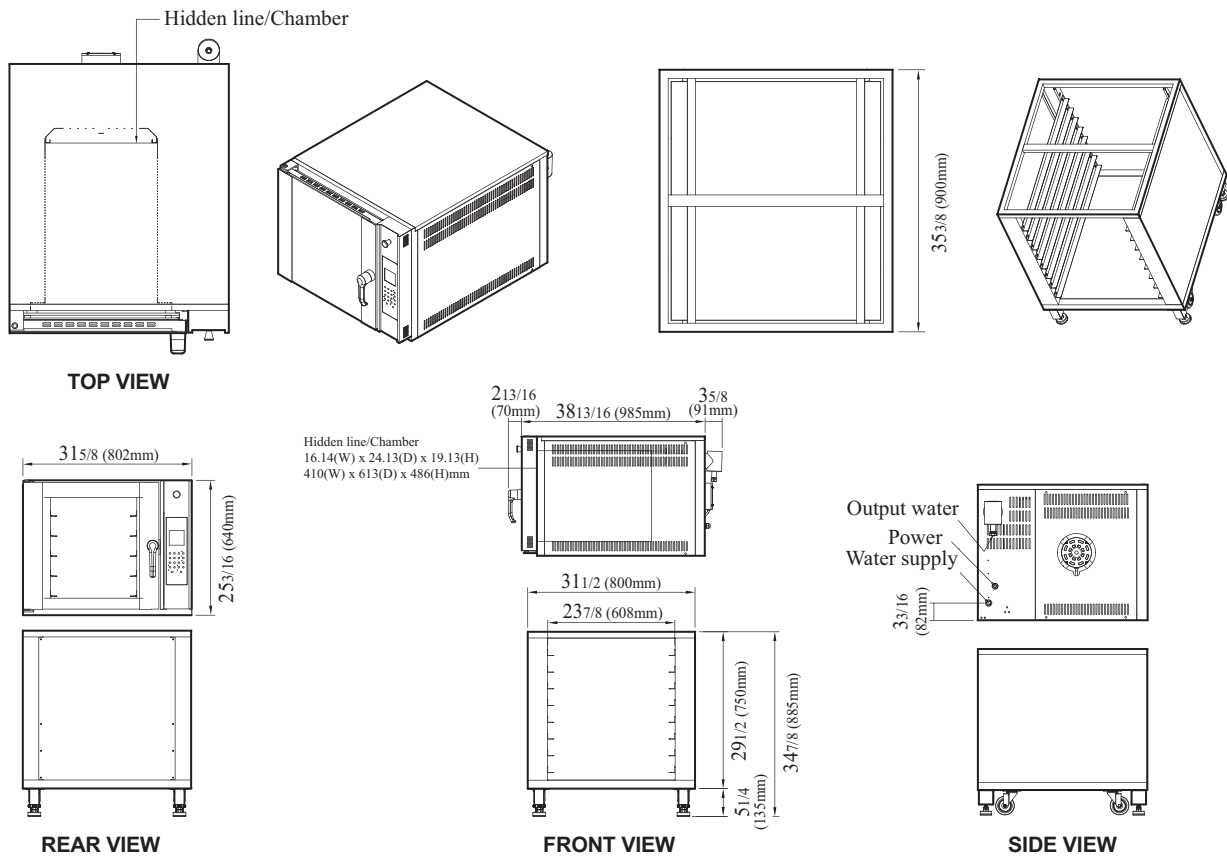

Ver.20260416



■ **Parts and Warranty: 800-500-3519**