

C51D 2.5kW 13Amp



Buttress Group Ltd.
Top Station Road, Brackley,
Northants NN13 7UG, UK



	Overall dimensions (W x D x H)	mm	575 x 605 x 820
	Packaging dimensions (W x D x H)	mm	670 x 690 x 980
↙	Gross weight	Kg	60
	Net weight	Kg	54
	Cubic volume	m ³	0.45
	Rack size	mm	500 x 500
☐	Door opening	mm	365
	Max useable height	mm	325/365 (glasses/plates)
	Rack guide rails		embossed
	Body construction		stratified double skin
	Tank construction		welded - stamped base
🔥	Tank volume	L	20
	Tank heating element	kW	2.0
	Surface scrap trays		composite (2.5mm mesh)
TANK	Wash arms		parallel (quick release)
	Wash pump type		dual flow
	Wash pump power	kW	0.5
	Wash temperature	°C	55 - 60 (adjustable)
🔥	Boiler type		open
	Boiler volume	L	6.0
	Breaktank		yes
	Boiler heating element	kW	2.0
BOILER	Rinse booster pump		yes
	Rinse booster pump power	kW	0.15
	Rinse temperature	°C	70 - 82 (adjustable)
	Rinse arms		parallel (quick release)
🚰	Drain system		partial drain
	Drain filter		triple filter
	Drain pump		yes
💧	Rinse aid dispenser	peristaltic	yes
	Detergent dispenser	peristaltic	yes
	Water consumption per cycle	L	1.5 - 2.0
🍷	Inlet water pressure	bar	0.5 - 6.0
	Fast program (GLS1)	sec	75
	Total programs	programs	9
	Total power	kW	2.5
⚡	Electric connection	V-Ph-Hz	230 - 240V 1N 50Hz
	Alternative		not convertible
	Fuse	A	13 (moulded plug)
🔗	Water softener		no



Supplied with

Dish rack	1
Flat rack	1
Cutlery rack	1
Electric cable	1
Drain hose	1
Fill hose	1

C51D 7.5kW 16Amp 3 Phase



Buttress Group Ltd.
Top Station Road, Brackley,
Northants NN13 7UG, UK



	Overall dimensions (W x D x H)	<i>mm</i>	575 x 605 x 820
	Packaging dimensions (W x D x H)	<i>mm</i>	670 x 690 x 980
↗ ↘	Gross weight	<i>Kg</i>	60
	Net weight	<i>Kg</i>	54
	Cubic volume	<i>m³</i>	0.45
	Rack size	<i>mm</i>	500 x 500
☐	Door opening	<i>mm</i>	365
	Max useable height	<i>mm</i>	325/365 (glasses/plates)
	Rack guide rails		embossed
	Body construction		stratified double skin
	Tank construction		welded - stamped base
🔥	Tank volume	<i>L</i>	20
	Tank heating element	<i>kW</i>	2.0
	Surface scrap trays		composite (2.5mm mesh)
TANK 🌡️	Wash arms		parallel (quick release)
	Wash pump type		dual flow
	Wash pump power	<i>kW</i>	0.5
	Wash temperature	<i>°C</i>	55 - 60 (adjustable)
	Boiler type		open
🕒	Boiler volume	<i>L</i>	6.0
	Breaktank		yes
	Boiler heating element	<i>kW</i>	5.0
BOILER 🌡️	Rinse booster pump		yes
	Rinse booster pump power	<i>kW</i>	0.15
	Rinse temperature	<i>°C</i>	70 - 82 (adjustable)
	Rinse arms		parallel (quick release)
	Drain system		partial drain
🚰	Drain filter		triple filter
	Drain pump		yes
	Rinse aid dispenser	<i>peristaltic</i>	yes
	Detergent dispenser	<i>peristaltic</i>	yes
	Water consumption per cycle	<i>L</i>	1.5 - 2.0
🍷	Inlet water pressure	<i>bar</i>	0.5 - 6.0
	Fast program (GLS1)	<i>sec</i>	75
	Total programs	<i>programs</i>	9
	Total power	<i>kW</i>	7.5
⚡	Electric connection	<i>V-Ph-Hz</i>	400V 3+N 50Hz
	Fuse	<i>A</i>	16
🔌	Water softener		no



Supplied with

Dish rack	1
Flat rack	1
Cutlery rack	1
Electric cable	1
Drain hose	1
Fill hose	1

C51D 6.5kW 30Amp



Buttress Group Ltd.
Top Station Road, Brackley,
Northants NN13 7UG, UK



C51D

	Overall dimensions (W x D x H)	mm	575 x 605 x 820
	Packaging dimensions (W x D x H)	mm	670 x 690 x 980
↙ ↘	Gross weight	Kg	60
	Net weight	Kg	54
	Cubic volume	m ³	0.45
	Rack size	mm	500 x 500
☐	Door opening	mm	365
	Max useable height	mm	325/365 (glasses/plates)
	Rack guide rails		embossed
	Body construction		stratified double skin
	Tank construction		welded - stamped base
🔥	Tank volume	L	20
	Tank heating element	kW	2.0
	Surface scrap trays		composite (2.5mm mesh)
TANK 🌡️	Wash arms		parallel (quick release)
	Wash pump type		dual flow
	Wash pump power	kW	0.5
	Wash temperature	°C	55 - 60 (adjustable)
🔥	Boiler type		open
	Boiler volume	L	6.0
	Breaktank		yes
	Boiler heating element	kW	6.0
BOILER 🌡️	Rinse booster pump		yes
	Rinse booster pump power	kW	0.15
	Rinse temperature	°C	70 - 82 (adjustable)
	Rinse arms		parallel (quick release)
🚰	Drain system		partial drain
	Drain filter		triple filter
	Drain pump		yes
💧	Rinse aid dispenser	<i>peristaltic</i>	yes
	Detergent dispenser	<i>peristaltic</i>	yes
	Water consumption per cycle	L	1.5 - 2.0
🍷	Inlet water pressure	bar	0.5 - 6.0
	Fast program (GLS1)	sec	75
	Total programs	<i>programs</i>	9
	Total power	kW	6.5
	Electric connection	V-Ph-Hz	230-240V 1N 50Hz
⚡	<i>Alternative</i>		2.5kW / 13A*
	<i>Alternative</i>		4.5kW / 20A
	Fuse	A	30
🔌	Water softener		no



Supplied with


Dish rack	1
Flat rack	1
Cutlery rack	1
Electric cable	1
Drain hose	1
Fill hose	1

*Moulded plug

C51D



Buttress Group Ltd.
Top Station Road, Brackley,
Northants NN13 7UG, UK

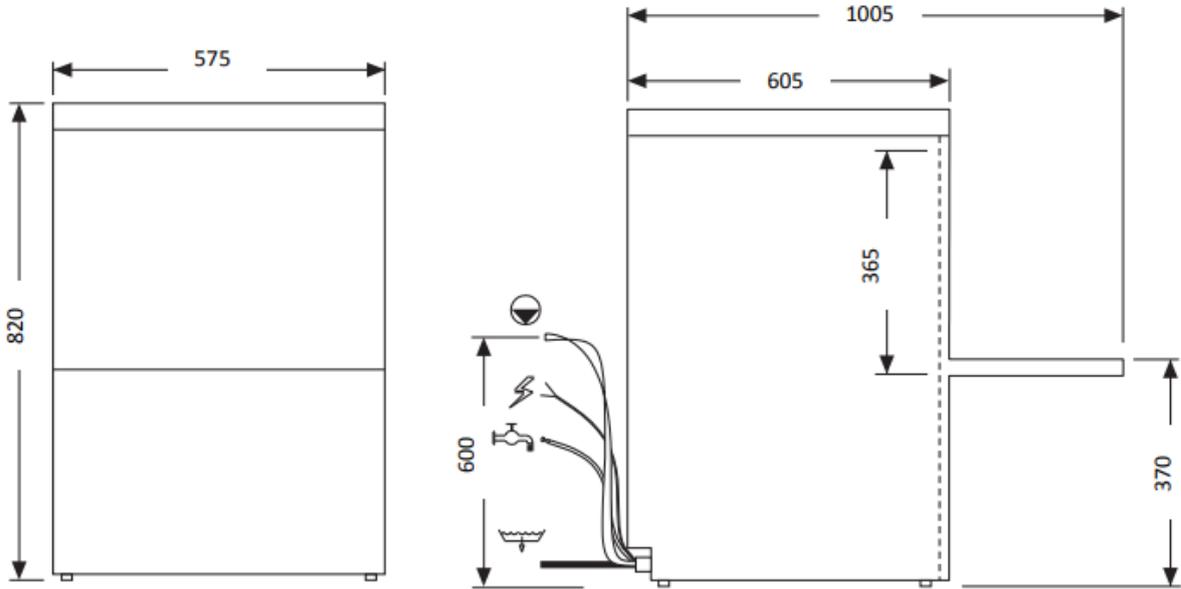

All services must be within 1 metre

T: 03451 308 070
E: sales@maidaid-halcyon.co.uk
Issue: 1.1