



UPT-SERIES

1-SECTION SOLID DOOR COMPACT ROLL-TOP PREP TABLE



Project Name:	Location:	AIA #:
Item #:	Qty:	Model #:
		SIS #:

UPT-SERIES - STAINLESS STEEL EXTERIOR & INTERIOR



32" WIDE MODELS

UPT3212-L	Hinged Left	(12) Pans
UPT3212-R	Hinged Right	(12) Pans

SPECIFICATIONS

DIMENSIONAL DATA

Capacity cu. ft.	9.3 (263.4 cu l)
Length in.	32 (81.3 cm)
Depth in. ³	34-1/2 (87.6 cm)
Height in. ²	44-1/8 (112.1 cm)

ELECTRICAL DATA

Horsepower ¹	1/5
Amps	7.2
Voltage	115/60/1
NEMA	5-15P

REFRIGERATION DATA

Refrigerant	R-290
Charge Amount oz.	3.5 (99 g)
BTU	1680

When ordering please specify:
Voltage, Hinging, and Options



NEMA 5-15P





1. Based on 90°F ambient & 20°F evaporator.
2. Overall height includes 4" (10.2 cm) for casters.
3. Overall depth includes standard cutting board.



Models listed to applicable UL, CSA, and NSF standards by an approved NRTL. Consult the factory or unit data plate for additional information.

Specifications subject to change without notice. Chart dimensions are rounded up to the nearest 1/16" (centimeters rounded up to the nearest tenth).

PLAN VIEW

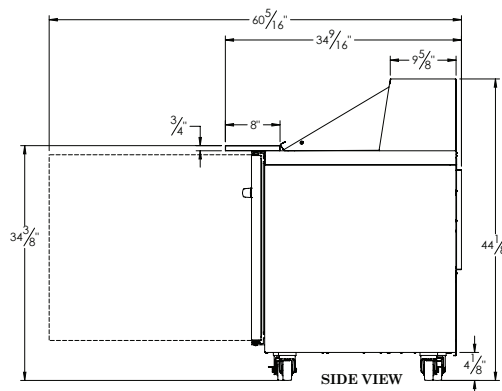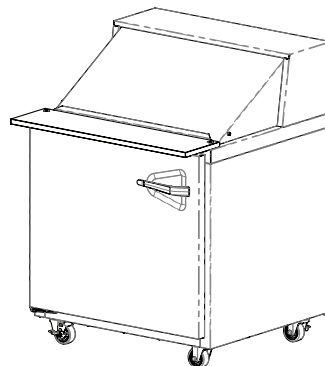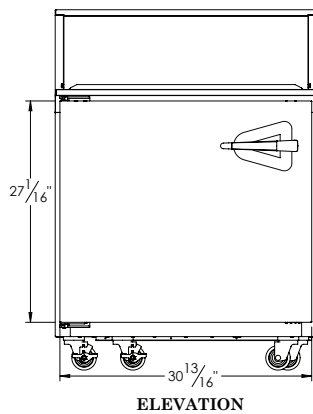



UPT-SERIES

1-SECTION SOLID DOOR COMPACT ROLL-TOP PREP TABLE



Project Name:	Location:	AIA #:
Item #:	Qty:	Model #:
		SIS #:

REFRIGERATION SYSTEM

- Self-contained, rear-mounted system uses environmentally friendly, minimal GWP R-290 refrigerant
- Tested to NSF7 standards
- Front-breathing system allows zero-clearance installation
- High performance, balanced system operates at 34-38°F (1-3.3°C) to maintain consistent, food-safe temperatures
- Chambered, forced-air rail operation
- Specialized, clock-wise airflow design in cabinet base
- Electronic control with an LED display
- Capillary tube refrigerant metering
- Forced-air evaporator coil; non-electric condensate evaporator

CABINET CONSTRUCTION

- Stainless steel exterior and interior
- Insulated stainless steel lid removable for easy cleaning
- Exterior back and bottom are constructed of heavy gauge galvanized steel
- Cabinet and door is insulated with an average of 2" (5.1 cm) thick high density, non-CFC foamed-in-place polyurethane
- (12) 4" deep 1/6 size polycarbonate pans; rail accommodates up to 6" deep pans
- 8" (20.3 cm) deep, full-length, removable NSF approved white polyethylene cutting board supplied standard
- Stainless steel divider bars provided
- A set of (4) 4" (10.2 cm) high casters; all with brakes
- 9' (2.7 m) cord & plug provided

DOOR

- Door is self-closing with a stay-open feature
- Door is field reversible; requires new door
- Magnetic, snap-in EZ-Clean™ door gasket is chemical-resistant
- Guaranteed for life metal workflow door handle

FACTORY-INSTALLED INTERIORS

- (2) adjustable, factory-installed coated wire shelves per section supported on pilasters

FIELD-INSTALLED INTERIOR/SUPPORT OPTIONS

- Additional coated wire shelf (SHLF-CPW2)
- Set of (4) 2-1/2" (6.4 cm) casters (CK28)
- Set of (4) 2-3/4" (6.9 cm) casters (CK26)
- Set of (4) 3-1/2" (8.9 cm) casters (CK24)
- Set of (4) 6" (15.2 cm) casters (CK20)
- Set of (4) 6" (15.2 cm) legs (LK4)

FACTORY-INSTALLED OPTIONS

- Stainless steel finished back (model number suffix -SB)

WARRANTY

Both a six-year parts and labor warranty, and an additional one-year compressor parts warranty (for a total of seven years) are provided standard



<https://traulsen.klccad.com>

Approved by:	Approved by:	Date:
--------------	--------------	-------