

SF24HCSA

Single Solid Door
Freezer



Specifications

Width*	Depth**	Height***	Shelves	Interior Cubic Volume	Ship Weight	Ship Cube	Cooling Capacity	Electrical
23 7/8" 607 mm	31" 788 mm	78" 1982 mm	3	16.1ft ³ (0.46m ³)	320 lbs. 1.32 m ³	46.68 cu.ft. 1.32 m ³	1 HP	115V/6.8 Amp/60 Hz - Single Phase - NEMA 5-15P, Dedicated Circuit

*Add 1.5" (38 mm) for casters. **Add 1" (26 mm) for power cord + 0.125" (3 mm) for door handle. ***Add 121 mm or 4.75" for casters.

Premium Features



Automatic Stainless Steel
Condensate Control System



Free & Clear
Condenser Coil



HABCO
Insulated Glass



LED



ProductTemp™



Variable speed



Digitally Controlled



Priority Air-Flow

SINGLE SOLID DOOR FREEZER

Specifications subject to change without notice. Refer to website for most current information.

SF24HCSA: Designed to enhance the refrigerated storage or display experience to the highest standards of quality and performance.

Refrigeration:

- Advanced variable speed compressor for extended operational life and improved energy efficiency.
- Split forced-air refrigeration system employs R290 refrigerant within a sealed capillary tube system.
- Condensing unit is bottom-mounted and can be accessed from the front for ease of maintenance.
- Priority, directed air flow provides optimum cooling and energy efficiency through front of unit for optimized heat exchange ventilation.
- Finless, Free&Clear Condenser Coil maximizes air-flow over compressor, reduces energy consumption and is non-clogging.
- Corrosion resistant coated evaporator coil.
- Automatic, stainless steel condensate control system.
- Equipped with Energy Efficient Digital Controller featuring visual/audible product protection alarm. Freezers factory preset for -23.3°C (-10°F).
- Technologically advanced ProcuTemp™ provides exterior product temperature display. Displays to a resolution within 1°.
- Energy-Saving, Time-Initiated, Temperature-Terminated Defrost System with Evaporator Fan Motor Delay during Defrost and Fan Motor Interrupt on Door Opening. Features Manual Defrost Override.
- Peak performance with EC motors designed for energy savings and superior performance.
- Equipped with Digital Thermometer.

Cabinet:

- Exterior – stainless steel front and sides.
- Stainless Steel Interior with coved corners stands up to rigours of everyday wear and tear.
- Ergonomic raised interior floor.
- Insulation – cabinet and solid doors are foamed-in-place with eco-conscious, polyurethane insulation.
- 5" Swivel Caster Kit Included.

Doors:

- Self-Closing Swing Doors feature a door lock and reversible on-location.
- Magnetic gaskets are single piece bead-mount construction easily removable for cleaning.
- Stainless steel front with white aluminum interior liner and large grip, recessed handle(s).

Lighting:


- Energy efficient LED lighting system for sparkling illuminated Interior Display.

Storage:

- Three (3) white coated shelves 18 1/2"W x 22 3/4"D (470mm x 578mm) are NSF approved.
- Heavy duty aluminum shelving pilasters will not peel or chip adjustment of 1/2" (13mm) increments.

Electrical:

- Factory power cord installed for connection to a sole-use (dedicated) 115V/60Hz/1-Phase, 15 Amp circuit.

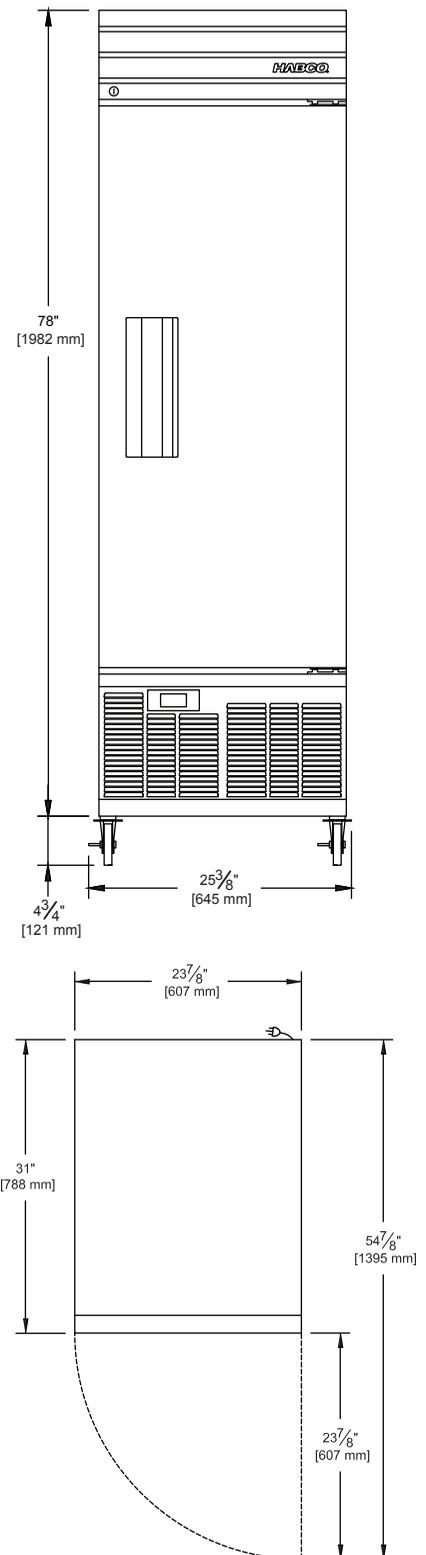

HABCO MANUFACTURING INC. 501 GORDON BAKER ROAD, TORONTO, ONTARIO, CANADA, M2H 2S6
Toll Free CAN:1-800-387-5398 USA:1-800-448-0244 Fax:416-491-6982 www.habcomfg.com