

### 25 cu ft Pass-Thru Refrigerators, Reach-In

- Key component to any high-volume cafeteria or commissary kitchen.
- Refill products from the back and serve from the front, creating efficiency in the kitchen or serving line.
- Available in solid door, glass door, and half-door combination options.



UCRP125-SS31A



UCRP125-GS31A



UCRP225-SS31A



UCRP225-GS31A



UCRP125-GG31A

| Model         | Description                                                                      | Voltage/Hz/Phase/Amps | Shipping Weight |
|---------------|----------------------------------------------------------------------------------|-----------------------|-----------------|
| UCRP125-SS31A | 25 cu ft Pass-Thru Refrigerator, 1 Front Door Solid, 1 Back Door Solid           | 115v / 60hz / 1 / 3.4 | 355 lb          |
| UCRP125-GS31A | 25 cu ft Pass-Thru Refrigerator, 1 Front Door Glass, 1 Back Door Solid           | 115v / 60hz / 1 / 3.4 | 355 lb          |
| UCRP225-SS31A | 25 cu ft Pass-Thru Refrigerator, 2 Half Front Door Solid, 2 Half Back Door Solid | 115v / 60hz / 1 / 3.4 | 355 lb          |
| UCRP225-GS31A | 25 cu ft Pass-Thru Refrigerator, 2 Half Front Door Glass, 2 Half Back Door Solid | 115v / 60hz / 1 / 3.4 | 355 lb          |
| UCRP125-GG31A | 25 cu ft Pass-Thru Refrigerator, 1 Front Door Glass, 1 Back Door Glass           | 115v / 60hz / 1 / 3.4 | 355 lb          |

#### Specifications


|                                                                                            |
|--------------------------------------------------------------------------------------------|
| Dimensions: 83 1/4" H x 28 3/8" W x 32" D (doors closed), 84 1/16" D (doors open)          |
| AISI 304 stainless steel interior and exterior with locks                                  |
| Autodefrost                                                                                |
| CFC-free high-density polyurethane insulated cabinet                                       |
| Environmentally friendly R290 refrigerant: 3.5 oz (0.100kg)                                |
| Electronic digital temperature control with alarms                                         |
| Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-15P            |
| High efficiency compressor, top mount                                                      |
| High efficiency evaporator coil & condenser                                                |
| LED interior lighting                                                                      |
| NSF/ANSI Standard 7 compliant                                                              |
| Self-lubricating, sealed cast iron evaporator fan motor with high volume airflow design    |
| Temperature range: 28°F to 46°F                                                            |
| Volume of 25 cu ft 1 section, includes 6 pairs of L style tray guides (trays not included) |

| Accessories  | Description                              | Shipping Weight |
|--------------|------------------------------------------|-----------------|
| ULAPS4181145 | (1) Stainless steel L-shaped shelf guide | 1 lb            |




## Product Specifications • 25 cu ft Pass-Thru Refrigerators, Reach-In


**Front**

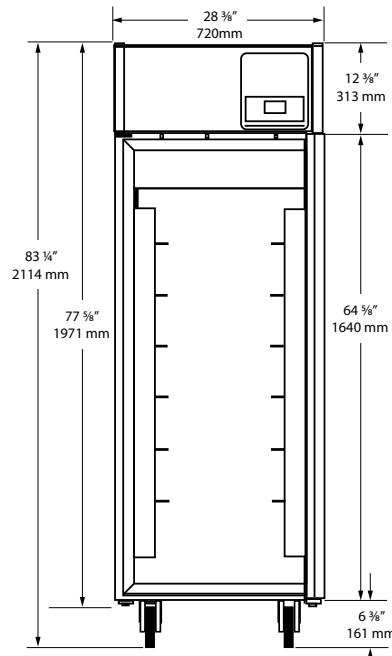

**Side**

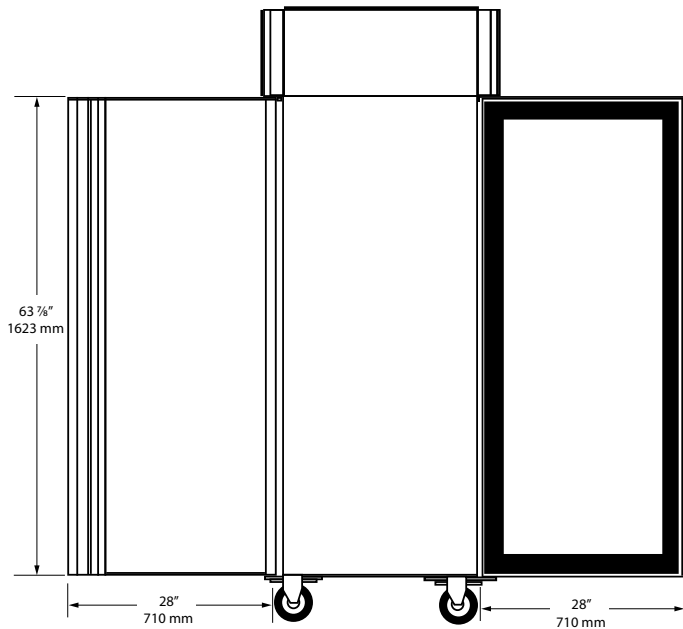

**Top**

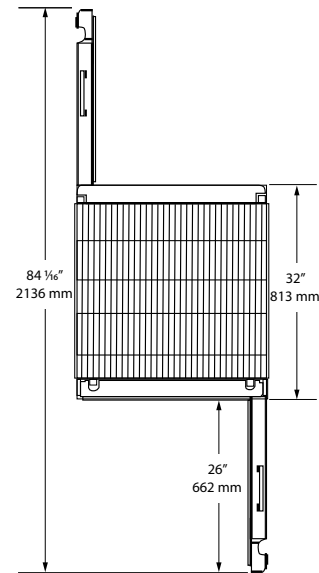

### Commercial Warranty

3 Year (parts & labor) / 5 year sealed system (parts)  
See complete warranty for details

