BEVERAGE-AIR

PROJECT: _____

ITEM # _____ QTY: _____

MODEL # _____

AIA # _____ SIS # _____

APPROVED: _____

HORIZON TOP MOUNT REFRIGERATORS

# HORIZON TOP MOUNT REFRIGERATORS

## Model: HRPS2HC-1HG

### HALF GLASS DOOR



## 7 YEAR WARRANTY

### Parts, Labor, and Compressor

## CABINET CONSTRUCTION

- Exterior is stainless steel front and sides
- Stainless steel interior
- Full electronic control
- One piece grille
- LED interior light
- Variable speed compressor technology
- Self-closing door with 120° stay-open feature, on cam-lift hinges
- Snap-in magnetic gaskets for positive door seal
- Six (6) heavy-duty epoxy coated wire shelves
- 6" Heavy-duty casters, two (2) with brakes
- 8' Cord and plug (see electrical data for details)

## OPTIONS & ACCESSORIES

- Tray slide pair, 1 tray slide set for (1) 18" x 26" or (2) 14" x 18" pans (A)
- Stainless steel universal tray slide pair, 1 tray slide set for (1) 18" x 26" or (2) 14" x 18" pans (AC)
- Tray slide kit #4 (19 sets per half section)
- Additional epoxy shelves
- Shelf clips
- Door locks
- Stainless steel breaker
- 6" Legs seismic/flanged
- 3" Casters
- Remote option* (see note on back page)

## REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Hot gas condensate evaporator
- Adaptive defrost
- Epoxy coated evaporator coil
- Maintains product temperatures between 36°F and 38°F

3779 Champion Blvd., Winston-Salem, NC 27105
888-8-9800 Fax: 336-245-6453
Beverage-Air.com Sales@bevair.com

Please verify qualifying units by visiting:
www.energystar.gov/cfs


Specifications are subject to change without prior notice.

Date Issued11/26 Printed in U.S.A.


# BEVERAGE-AIR

# Horizon Top Mount
## Model: HRPS2HC-1HG


PLAN VIEW

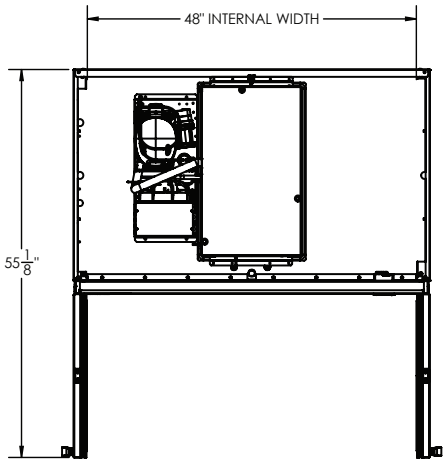


ELEVATION VIEW

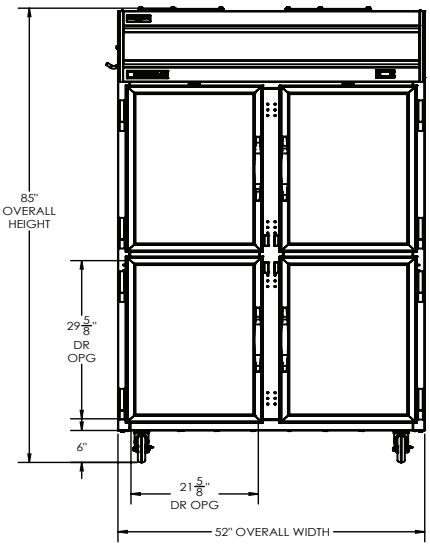


SIDE VIEW

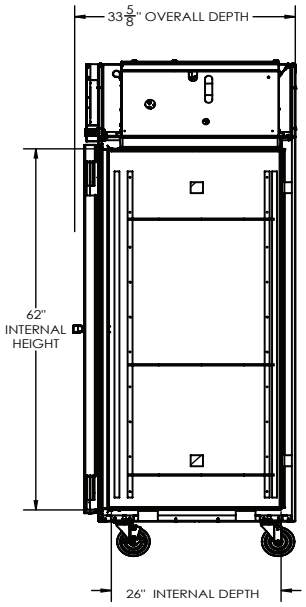


| EXTERNAL DIMENSIONAL DATA | |
|---|---|
| Width Overall (in) | 52” |
| Depth Overall (in) | 33 5/8” |
| Height Overall (in) | 85” |
| Number of Doors | 4 |
| Depth with Door Open 90° (in) | 55 1/8” |
| Door Openings (in) | 21 5/8” x 29 5/8” |
| **INTERNAL DIMENSIONAL DATA** | |
| NET Capacity (cubic ft). | 46.88 |
| Internal Width Overall (in) | 48” |
| Internal Depth Overall (in) | 26” |
| Internal Height Overall (in) | 62” |
| Number of Shelves | 6 |

*NOTE: Remote units are field wired and come with 6” legs.
Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

Required Clearance: Top 12” and Rear 3”

| ELECTRICAL DATA | |
|---|---|
| Full Load Amps | 6.0 |
| Voltage | 115/60/1 |
| Nema Plug (8’ cord) | 5-15P |
| **REFRIGERATION DATA** | |
| Horsepower | 1/3 |
| Capacity (BTU/Hr) | 2800 |
| Heat Rejection (BTU/Hr) | 4200 |
| Charge (lbs/grams/ounces) | 0.3307 / 150 / 5.30 |
| **SHIPPING DATA** | |
| Gross Weight - Crated | 540 lbs. |
| Height - Crated (in) | 88” |
| Width - Crated (in) | 54” |
| Depth - Crated (in) | 41” |

### ELECTRICAL CONNECTION




115/60/1
NEMA 5-15P

Unit pre-wired at factory and include 8’ long cord and plug set.

NOTE: Units that utilize variable speed compressor technology can experience nuisance tripping on Class A GFCI outlets which have a trip limit of 4 to 6 mA. To avoid this issue in a location that requires GFCI circuit protection, Beverage-Air recommends using either an Eaton, SGF20, or HUBBELL Model Number GFRST83W 20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle.


3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com



Date Issued11/26 | Printed in U.S.A.



WELBILT
an Ali Group Company