

# FRY TOP S Electric M60 AISI plate - smooth - on thermostatically controlled compartment

Project: .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1652509

MODELLO  
D93/10SFTEA

SERIE  
DIAMANTE90



## GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently.  
External coatings and feet in stainless steel with Scotch Brite finish.  
Working table height adjustable from 840 to 900 mm.  
Range modularity: 200-400-600-800-1200  
Wide range of accessories.

## TECHNICAL SPECIFICATIONS

15 mm thick cooking plate totally independent of the hob .  
Large floodable channel around the perimeter of the hotplate for collecting cooking residues, sloping towards the front for draining liquids into the large drawer.  
Large grease collection drawer.  
Uniform baking temperature over the entire plate.  
Optimising heat in the cooking area and increasing the comfort of operators in the kitchen.  
Plate not welded to the machine bed with optimisation of structural points under thermal stress  
Stainless steel overflow plug, supplied as an accessory, for channel flooding management  
Non-welded plate for fast maintenance and replacement in the utility  
New version with identical cooking surface area and reduced energy output.  
An increase in output per cm<sup>2</sup> allows a reduction in consumption of up to 15% compared to conventional versions

Floodable gutter for collecting cooking residues around the perimeter of the cooking plate easier cleaning and better retention of moisture in cooking food

Capacious grease collection drawer with capacity for the entire volume of the perimeter channel

Grooved plate design ensures cleanliness right to the end of the plate

Non-welded plate for fast maintenance and replacement in the utility

Plate not welded to the machine bed with optimisation of structural points under thermal stress

Thermal cutting that facilitates the user and adjacent machinery.

Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen.

Water dispenser kit available as an accessory

# FRY TOP S Electric M60 AISI plate - smooth - on thermostatically controlled compartment

Project: .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1652509

MODELLO  
D93/10SFTEA

SERIE  
DIAMANTE90

## Technical Information

| SPECIFICATION         | DATA                               |
|-----------------------|------------------------------------|
| MATERIAL              | CR1652509                          |
| DEFINITION            | D93/10SFTEA FTE SMOOTH 430 M60 A/G |
| COMMERCIAL LINE       | DIAMANTE                           |
| SUPPLY                | ELECTRICS                          |
| DIM. WIDTH            | 600 mm                             |
| DIM. PRODUCTIVITY     | 900 mm                             |
| DIM. HEIGHT           | 870 mm                             |
| NET WEIGHT            | 22,000 Kg                          |
| VOLUME (net)          | 0,470                              |
| PACKAGE LENGTH        | 640,000 mm                         |
| PACKAGE WIDTH         | 890 mm                             |
| PACKAGING HEIGHT      | 1230,000 mm                        |
| PACKAGE VOLUME        | 0,702 m3                           |
| GROSS PACKING WEIGHT  | 29,000 Kg                          |
| STANDARD POWER SUPPLY | 380-415V 3N                        |
| FREQUENCY             | 50-60 Hz                           |
| ELECTRICAL POWER      | 7,500 kW                           |
| IP GRADE              | IPX5                               |
| CERTIFIED MODEL       | D93/10SFTEA                        |

# FRY TOP S Electric M60 AISI plate - smooth - on thermostatically controlled compartment

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR1652509

MODELLO  
D93/10SFTEA


SERIE  
DIAMANTE90

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm  
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

D92/10STFTE..

D93/10STFTE..



D94/10STFTE..

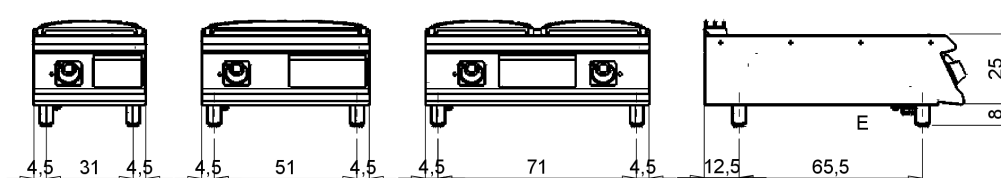

D92/10SFTE..

D93/10SFTE..

D94/10SFTE..

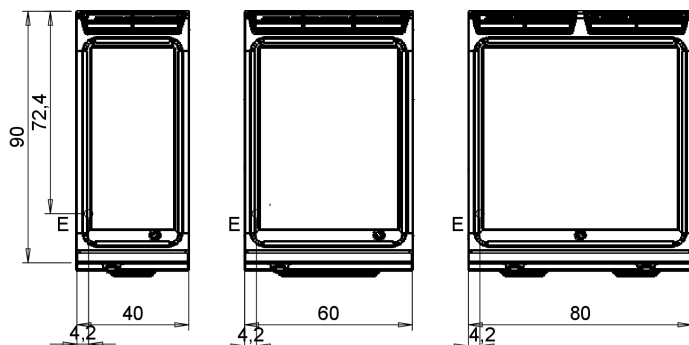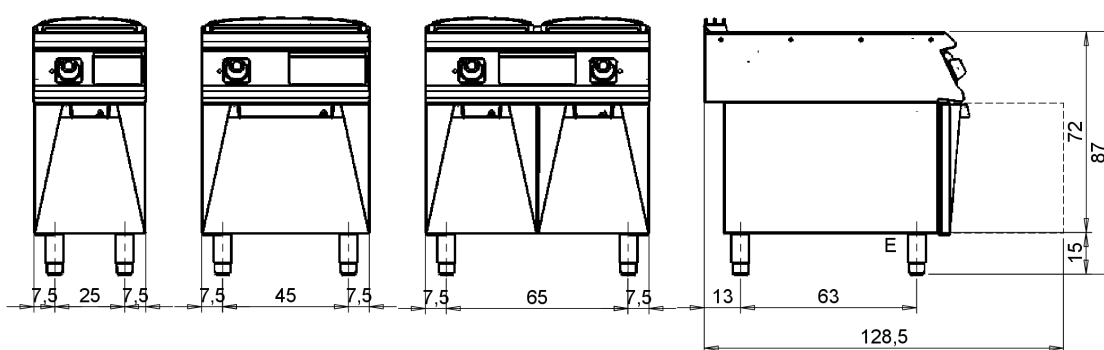

## Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda

|                                                                                                                                                                                                                                                      |                                                                                                                                    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| <b>E</b> Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwarterl - Entrada cabo eléctrico                                                                 | <b>G</b> Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás                    |
| <b>S</b> Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água                                                                                                         | <b>H20</b> Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água |
| <b>S1</b> Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba                                                                                                                         | <b>A1</b> Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno                                                                  |
| <b>S2</b> Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão                                                                                   | <b>A2</b> Fredda - Kalt - Cold - Froid - Fria - Koude - Frio                                                                       |
| <b>S3</b> Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de água interstícios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto | <b>L</b> Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nível      |
| <b>S4</b> Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno                                                                                                                                      |                                                                                                                                    |

# FRY TOP S Electric M60 AISI plate - smooth - on thermostatically controlled compartment

Project: .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1652509

MODELLO  
D93/10SFTEA

SERIE  
DIAMANTE90

## Product's PLUS




Plate not welded to the machine bed with optimisation of structural points under thermal stress



Capacious grease collection drawer with capacity for the entire volume of the perimeter channel



Thermal cutting that facilitates the user and adjacent machinery.



Grooved plate design ensures cleanliness right to the end of the plate



Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen.



Non-welded plate for fast maintenance and replacement in the utility



Water dispenser kit available as an accessory

FRY TOP S Electric M60 AISI plate - smooth - on  
thermostatically controlled compartment

|           |             |            |
|-----------|-------------|------------|
| CODICE    | MODELLO     | SERIE      |
| CR1652509 | D93/10SFTEA | DIAMANTE90 |

Project: .....  
Rev.: .....  
Zone: .....  
Location: .....



Water dispenser kit available as an accessory

FRY TOP S Electric M60 AISI plate - smooth - on thermostatically controlled compartment

Project: .....  
Rev.: .....  
Zone: .....  
Location: .....



|           |             |            |
|-----------|-------------|------------|
| CODICE    | MODELLO     | SERIE      |
| CR1652509 | D93/10SFTEA | DIAMANTE90 |

ACCESSORIES

| CODE      | MODELLO   | DESCRIZIONE                       |
|-----------|-----------|-----------------------------------|
| CR1354989 | PRPC      |                                   |
| CR1354999 | PKLR      |                                   |
| CR1356399 | RPR       | Striped chrome plate scraper      |
| CR1658629 | D97CPFT68 | Fry top cleaning drawer M60 - M80 |
| CR1658609 | 97TFT     |                                   |
| CR1658679 | D9AFT6    |                                   |
| CR1659159 | Q94GKSCFT |                                   |
| CR1658839 | Q794CAFT  |                                   |