Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301



TCM-46-N7

OPTIONS:

- ❑ Internal Locking device
- ❑ 10" deep pan liner
- ❑ 14 gauge tops
- ❑ Condensate evaporator
- ❑ False Bottom
- ❑ Foodshields
- ❑ Work Shelves
- ❑ Trayslides
- ❑ Sliding doors
- ❑ 6" adjustable Stainless steel legs
- ❑ 8' or 10' cord and plug
- ❑ Food pans
- ❑ Veneered plastic laminate panels on body
- ❑ Powder coat paint colors
- ❑ Drain and condensing unit on operator's left
- ❑ Kickplates SS & PG
- ❑ 34" ADA height (units finish at 33.5"). Adjustable height casters with 5/8" adjustability allow leveling to 34".

AGENCY LISTINGS:

UL/ANSI NSF 7

c UL us LISTED

DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102
800.735.3853 Toll Free
314.231.5074 Fax
www.dukemfg.com

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Thurmaduke™ Serving Systems - Cold Pan Mechanically Cooled - Meets NSF Standard 7 - 8" Deep

- ■ **TCM-32-N7** 32" length unit - 2 wells
- ■ **TCM-46-N7** 46" length unit - 3 wells
- ■ **TCM-60-N7** 60" length unit - 4 wells
- ■ **TCM-74-N7** 74" length unit - 5 wells
- ■ **TCM-88-N7** 88" length unit - 6 wells

TOP:

- ■ 16 gauge, 300 Series stainless steel
- ■ Edges flanged down 2" at 90° - all four sides
- ■ Inside edges flanged down 90° against liner

COLD PAN LINER:

- ■ 300 Series stainless steel - 8" deep
- ■ Insulated on all four sides and bottom
- ■ 1" drain pipe and shut-off valve on operator's right

REFRIGERATION:

- ■ 120 VOLT - 1 Phase - 448a refrigerant
- ■ Condensing unit below top on operator's right
- ■ Stainless steel louvered grille for air circulation
- ■ Copper coils attached to bottom of 8" liner
- ■ 6' electric cord and plug - NEMA 5-15
- ■ Necessary controls for operation

BODY:

- ❑ Choice of (12) powder coat paint colors contact sales
- ❑ Stainless steel body
- ■ Operator's side open to bottom shelf
- ■ Customer side and ends fully enclosed
- ■ Bottom shelf paint grip or stainless steel to match body

THURMADUKE™ SERVING SYSTEMS - COLD PAN - N7

Catalog No. TSS-COLDN7

A.I.A. File No. 35-C-13

Specification subject to change


WARNING For CA residents: go to www.dukemfg.com/prop65 for prop 65 warning

A.I.A. File No. 35-C-13

Catalog No. TSS-COLDN7


THURMADUKE™ SERVING SYSTEMS - COLD PAN - N7

Thurmaduke®

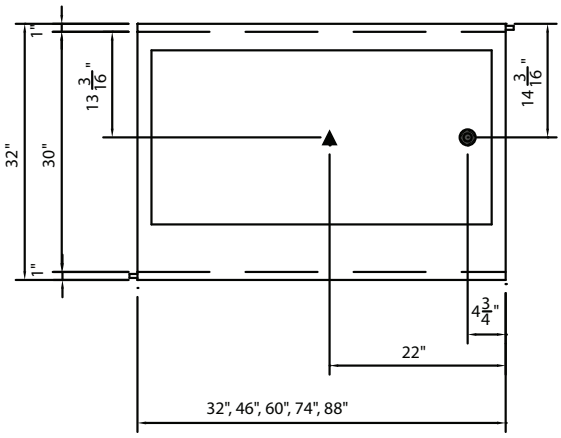


TOP VIEW

LEGEND
▲ - ELECTRICAL CONNECTION - 6' Cord & Plug
● - DRAIN LOCATION - 1" brass drain, shut-off valve, drain extension 7" above floor

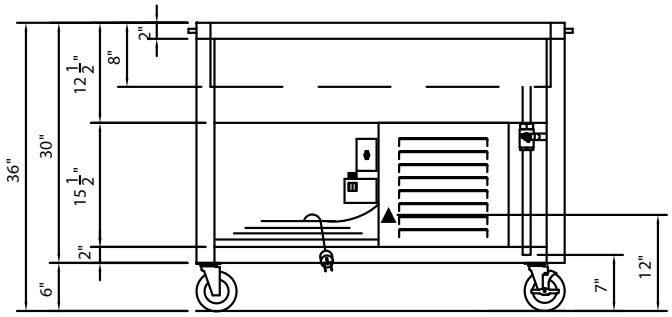

FRONT VIEW



RIGHT SIDE VIEW

DIMENSIONS: Mechanical 8" Deep Cold Pan - All Units: Height - 36" (91.4 cm); Width - 32: (81.3cm)

FREIGHT CLASS: 150

Model	Body Length		Cold Pan Liner Dimensions						Cube ft. crated	Weight	
			Length		Width		Depth				
	in	cm	in	cm	in	cm	in	cm		lbs	kg
TCM-32-N7	32	81.3	28 ½	72.4	21 ¾	55.3	8	20.3	34.8	255	115.9
TCM-46-N7	46	116.8	42 ½	108.0	21 ¾	55.3	8	20.3	47.7	354	160.9
TCM-60-N7	60	152.4	56 ½	143.5	21 ¾	55.3	8	20.3	60.5	425	193.2
TCM-74-N7	74	188.0	70 ½	179.1	21 ¾	55.3	8	20.3	73.3	518	235.5
TCM-88-N7	88	223.5	84 ½	214.6	21 ¾	55.3	8	20.3	86.2	580	263.4

ELECTRICAL SPECIFICATIONS: (Consult factory for other options)

Model	120 Volt/NEMA 5-15	Refrig
	Amps	448A oz
TCM-32-N7	6.14	11
TCM-46-N7	6.78	12
TCM-60-N7	6.78	14
TCM-74-N7	6.78	18
TCM-88-N7	6.78	18

Your Solutions Partner

Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com

© 2020, Duke Manufacturing Co.