



# Zip HydroChill HC50

**FILTERED: CHILLED SPARKLING**

The perfect choice for front of house, HydroChill Under-Counter features a number of stylish tap designs. It is the ideal solution for installations that require the unit to be tucked away out of sight. The HC50T2P150 provides chilled and sparkling water from a two spout tap with badge.



| MODEL      | TAP STYLE | ULTRA VIOLET | CAPACITY (L/HR) | NOMINAL POWER RATING KW | DIMENSIONS W X D X H  |
|------------|-----------|--------------|-----------------|-------------------------|-----------------------|
| HC50T2P150 | Spout Tap | N            | 150 L/hr        | 0.875 kW @ 230V AC      | 460mm x 460mm x 608mm |

## Features and benefits

### Pure, clean water

Provide pure-tasting water in an instant, thanks to Zip's 3 micron MicroPurity filtration system, which removes impurities and contaminants.

### Environmentally responsible

Create a healthier, greener workplace with no need for plastic bottles.

### Caters for high volume usage

The HydroChill range has been designed to cater for commercial settings where large volumes of drinking water are required. In fact, the HydroChill Under-Counter HC50 has the capability to provide up to 150 litres of chilled or sparkling water an hour from a single unit.

### Consumables and accessories

Serve clean-tasting water in a professional way by using Zip's table-top glass bottles.

### Easy to install

Quick and simple to install and use.

## Product detail

---

### Specification type

|                           |   |
|---------------------------|---|
| Product code              | HC50T2P150  |
| Product name              | HydroChill HC50 under-counter 150ltr chilled & sparkling 2 spout tap with badge |
| Factory Temperature Range | 5-12°C  |



**WARNING** R290 is a CFC free, environmentally friendly but highly flammable gas. The product should be installed and operated within the instructions in the supplied manual

### Capacity, weights & dimensions

|                                |                       |
|--------------------------------|-----------------------|
| Water Functions                | Chilled, Sparkling    |
| Capacity (litres per hour)     | 150 L/hr              |
| Product weight                 | 45kg                  |
| Unit dimensions (W x D x H) mm | 460mm x 460mm x 608mm |

### Plumbing

|  |   |
|--|---|
| Whole cold water inlet supply required | Yes   |
| Inlet pipe                             | 15mm  |
| Supply pressure range                  | 2.5bar (Min) - 3.5bar (Max)                       |
| Installation                           | Must comply with current water supply regulations |

The minimum water pressure will vary if a limescale filter is installed. Please contact us to discuss your requirements.

### Electrical

|                         |  |
|-------------------------|--|
| Nominal power rating kw | 0.875 kW @ 230V AC                       |
| Power supply option     | 1x 13amp socket outlet                   |
| Installation            | Must comply with current IEE regulations |

### Filtration

|  |  |
|--|--|
| Taste & Odour Filtration Kit - available to purchase | HCF4S - Zip MicroPurity filter HD 3 Micron 150 - 280 l/ph with CO2 Regulator |
| Sterilising UV filtration at point of dispense       | No   |

## CO<sub>2</sub> Gas

---

CO<sub>2</sub> regulator and fittings supplied, cylinder not supplied

---



**STORAGE WARNING** CO<sub>2</sub> contains gas and should be installed in a well ventilated area. Refer to installation manual for more information.

## Warranty

---


2 years on-site parts and labour on site

Terms and conditions apply (see supplied manual)



---

## Technical drawings & dimensions

All dimensions in mm



HC50 2 Spout tap with badge

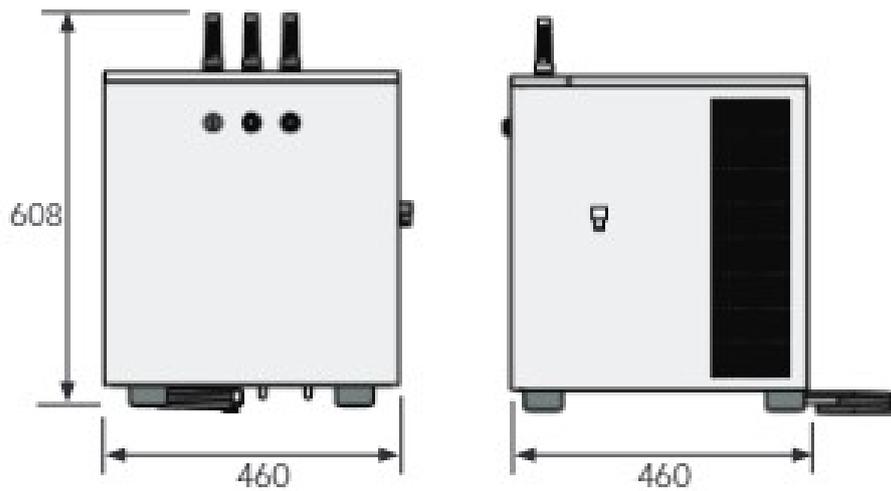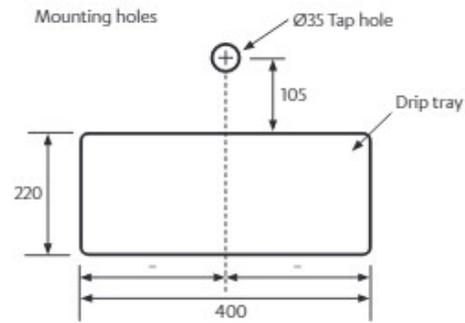

HC50 150 litre

## Accessories

---

Visit [specify.zipwater.co.uk](https://specify.zipwater.co.uk) to find out more information about Zip HydroChill HC50 Accessories

| Image   | SKU   | Title  |
|---|-------|--|
|  | 94773 | Stainless Steel drip tray 150 x 220mm for HC50 Taps            |
|  | 94774 | Stainless Steel drip tray 400 x 220 mm for HC50 Taps           |
|  | 94775 | Stainless Steel drip tray with drain 400 x 220mm for HC50 Taps |

---