DriTec - N8600-FWH Hot Well

Individually Controlled Dry Hot Wells

Models

• N8618-FWH	18” Low Watt Dry Hot Well Drop-in
• N8633-FWH	33” Low Watt Dry Hot Well Drop-in
• N8648-FWH	48” Low Watt Dry Hot Well Drop-in
• N8663-FWH	63” Low Watt Dry Hot Well Drop-in
• N8678-FWH	78” Low Watt Dry Hot Well Drop-in
• N8693-FWH	93” Low Watt Dry Hot Well Drop-in



N8648-FWH

Standard Features

- NSF-4 certified for hot operation
- Wells operate independently for hot operation
- Flush mount pans standard
- Thermostatic temperature controls
- Dry operation only – No water required
- High density environmentally friendly Kyoto Protocol compliant, Non-ODP (Ozone Depletion Potential), Non-GWP (Global Warming Potential) polyurethane foam throughout
- Push in flange gasket is standard
- 2-year parts and labor warranty, standard parts warranty
- Adapter bars

Specifications

Top: Top is constructed of one-piece stainless steel.

Interior: Interior liner is constructed of aluminum with flush mount flange for heating to accommodate up to 6” (15cm) deep 12”x20” pans, pans supplied by others.

Exterior: Exterior body is constructed of galvanized steel with High density environmentally friendly Kyoto Protocol compliant, Non-ODP (Ozone Depletion Potential), Non-GWP (Global Warming Potential) polyurethane foam throughout.

Operation: Remote control panel contains lighted on/off power switch and thermostat for heated operation.

Electrical: All drop-in units must be hard wired at installation.


980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981
Fax: 800-669-0619


www.delfield.com
7362_N8600-FWH
09/25

Delfield®


DriTec - N8600-FWH




N8618-FWH

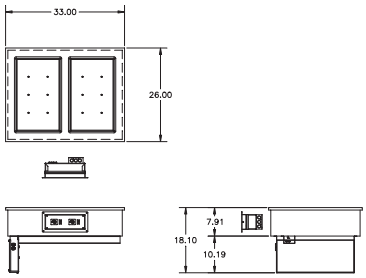


N8633-FWH

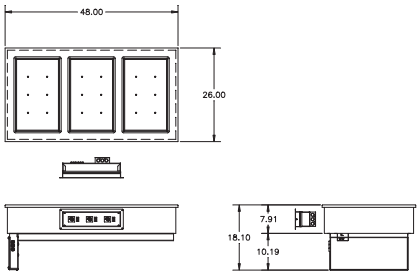


N8648-FWH

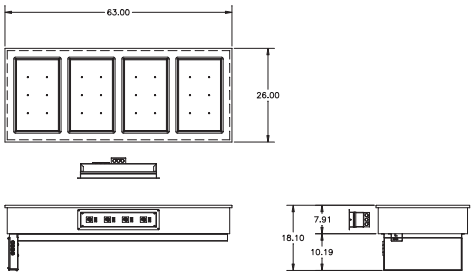

N8663-FWH

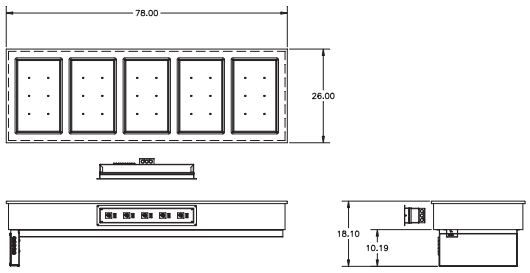

N8678-FWH

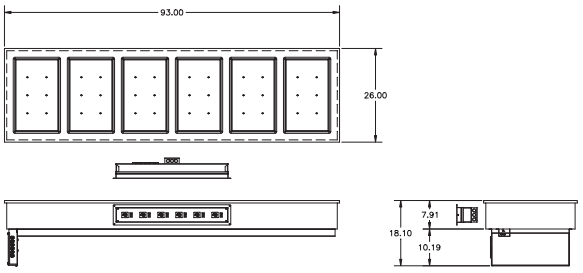

N8693-FWH

Model	12"x20" Pan capacity	Electrical *500 watt per well, Amps per well*	WxDxH	Top Cutout dimensions (D)	Control Cutout dimensions (G)
N8618-FWH	1	500 W, 208Y-240 V, 1PH, 2.0 A	18" x 26" x 18.13"	17.00" x 25.00" (43cm x 64cm)	11.38" x 4.38" (29cm x 11cm)
N8633-FWH	2	(2) 500 W, 208Y-240 V, 1PH, 4.0 A	33" x 26" x 18.13"	32.00" x 25.00" (82cm x 64cm)	11.38" x 4.38" (29cm x 11cm)
N8648-FWH	3	(3) 500 W, 208Y-240 V, 1PH, 6.0 A	48" x 26" x 18.13"	47.00" x 25.00" (120cm x 64cm)	16.38" x 4.38" (42cm x 11cm)
N8663-FWH	4	(4) 500 W, 208Y-240 V, 1PH, 8.0 A	63" x 26" x 18.13"	62.00"x 25.00" (158cm x 64cm)	21.38" x 4.38" (55cm x 11cm)
N8678-FWH	5	(5) 500 W, 208Y-240 V, 1PH, 10.0 A	78" x 26" x 18.13"	77.00" x 25.00" (196cm x 64cm)	26.38" x 4.38" (67cm x 11cm)
N8693-FWH	6	(6) 500 W, 208Y-240 V,1PH, 12.0 A	93" x 26" x 18.13"	92.00" x 25.00" (234cm x 64cm)	31.38" x 4.38" (80cm x 11cm)

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948
Fax: 800-669-0619


www.delfield.com


7362_N8600-FWH
09/25

Delfield®

Delfield®

DriTec - N8600-FWH

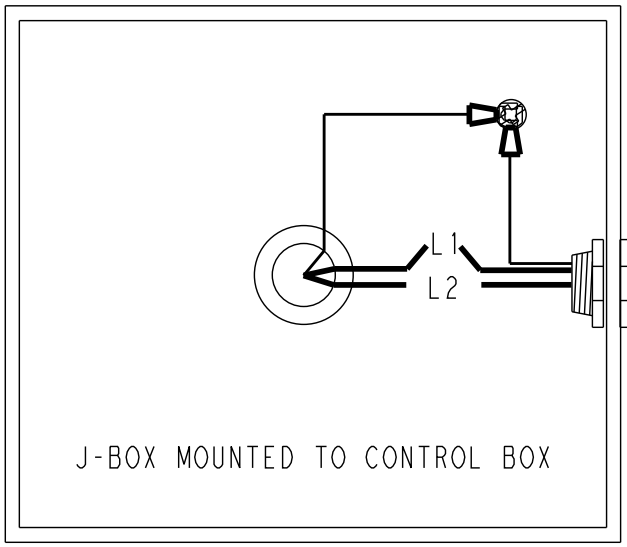

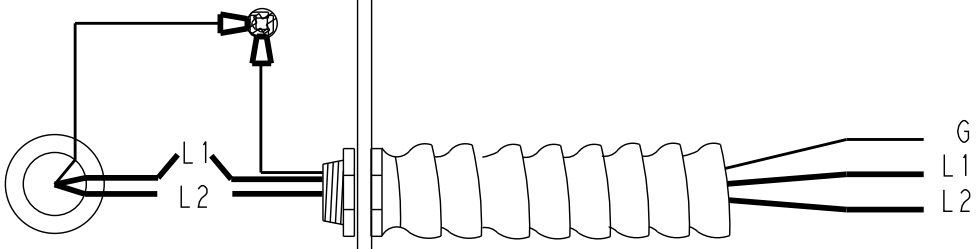

208-240V POWER
SUPPLY (HARD WIRE)
*NUMBER OF WELLS
DETERMINES AMP
REQUIREMENTS*

Welbilt reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948
Fax: 800-669-0619

www.delfield.com
7362_N8600-FWH
09/25

Delfield®