




Profit from the Eagle Advantage®

Specification Sheet

Short Form Specifications

Eagle Drop Shelf, model _____. (Poly, Richlite®, or 16 gauge type 304 stainless steel with wooden core) 3/4"-thick. Comes with two chrome-plated drop brackets, shipped loose for ease of field installation. Available in 10" and 12" widths, and 24" through 36" lengths.

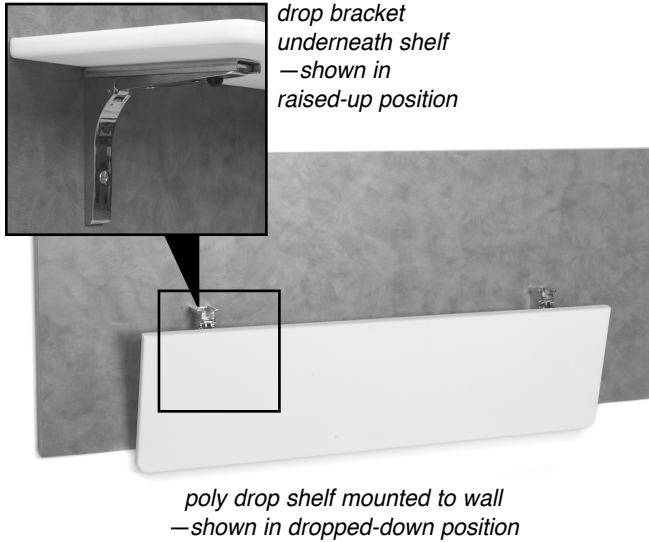

Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

Wall Mounted Drop Tables/Shelves

MODELS:

- | | | |
|-----------------------------------|-----------------------------------|-----------------------------------|
| <input type="checkbox"/> DSP-1024 | <input type="checkbox"/> DSR-1024 | <input type="checkbox"/> DSS-1024 |
| <input type="checkbox"/> DSP-1030 | <input type="checkbox"/> DSR-1030 | <input type="checkbox"/> DSS-1030 |
| <input type="checkbox"/> DSP-1036 | <input type="checkbox"/> DSR-1036 | <input type="checkbox"/> DSS-1036 |
| <input type="checkbox"/> DSP-1224 | <input type="checkbox"/> DSR-1224 | <input type="checkbox"/> DSS-1224 |
| <input type="checkbox"/> DSP-1230 | <input type="checkbox"/> DSR-1230 | <input type="checkbox"/> DSS-1230 |
| <input type="checkbox"/> DSP-1236 | <input type="checkbox"/> DSR-1236 | <input type="checkbox"/> DSS-1236 |

Features

- 3/4" (19mm)-thick shelves feature rounded edges for safety.
- Shelves available in poly, Richlite®, or 16/304 stainless steel with wooden core.
- Comes with two drop brackets and six screws*.
- Chrome drop brackets are shipped loose for fast and easy field installation.
- 10" and 12" (254 and 305mm) widths available.
- Lengths available range from 24" to 36" (610 to 914mm).
- Weight capacity of 80 lbs. (36.3 kg).

* Screws included are for attaching brackets to shelf. Hardware for mounting to wall furnished by others.

| width | | length | | POLY * | | | RICHLITE®** | | | 16/304 STAINLESS STEEL WITH WOODEN CORE | | |
|-------|-----|--------|-----|--------|-----|----------|-------------|-----|----------|---|-----|----------|
| in. | mm | in. | mm | lb. | kg | model # | lb. | kg | model # | lb. | kg | model # |
| 10" | 254 | 24" | 610 | 8 | 3.6 | DSP-1024 | 9 | 4.1 | DSR-1024 | 12 | 5.4 | DSS-1024 |
| 10" | 254 | 30" | 762 | 10 | 4.5 | DSP-1030 | 11 | 5.0 | DSR-1030 | 14 | 6.4 | DSS-1030 |
| 10" | 254 | 36" | 914 | 11 | 5.0 | DSP-1036 | 13 | 5.9 | DSR-1036 | 16 | 7.3 | DSS-1036 |
| 12" | 305 | 24" | 610 | 8 | 3.6 | DSP-1224 | 10 | 4.5 | DSR-1224 | 14 | 6.4 | DSS-1224 |
| 12" | 305 | 30" | 762 | 11 | 5.0 | DSP-1230 | 14 | 6.4 | DSR-1230 | 16 | 7.3 | DSS-1230 |
| 12" | 305 | 36" | 914 | 13 | 5.9 | DSP-1236 | 19 | 6.4 | DSR-1236 | 18 | 8.2 | DSS-1236 |

* Poly shelves can withstand hot items up to 180°F without discoloration.
 ** Richlite® shelves can withstand hot items up to 350°F without discoloration.

EAGLE GROUP
 100 Industrial Boulevard, Clayton, DE 19938-8903 USA
 Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065
www.eaglegrp.com
www.eaglegrpnews.com
www.eaglemh.com



For custom configuration or fabrication needs, contact our **SpecFAB® Division**.
 Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

EG02.15 Rev. 12/22

Spec sheets available for viewing, printing or downloading from our online literature library at our websites