

Synergy Refrigerated Deck

Product Group: **Synergy Drop-ins**
 Range: **Refrigerated**
 Sub Range:
 Product Name: **Blown Air Deck**
 Part Number: **DRDK**
 Victor Computer Code: **DRDKY**
 Price List Page: **Synergy 4**

Electrical Connection
 220V/240V, 1 phase, 50 Hz.

Refrigerant
 R404a CFC free refrigerant

Cable
 Units fitted with 2 metres of cable and 13 amp plug.

Construction
 Top: Stainless Steel, Exterior: Stainless Steel,
 Interior: Stainless Steel

Designed for self or assisted service. With rear preparation shelf

Gantry Features

- Constructed from 50mm diameter, bright polished stainless steel tube.
- Fluorescent illumination to stainless steel light box.
- Toughened glass screen and over shelf.
- Digital temperature control and readout.

Well Features

- 304 Stainless steel well - 170mm deep
- Load line indicator at 100mm to assist in the safe presentation of food
- Accepts GNI/1 gastronorm containers up to 100mm deep.
- Completely removable well giving easy access for cleaning and maintenance

Options


- Front facing controls

Extras

- Polyethylene cutting board 600 x 250 x 40mm - Fits over rear preparation shelf.



Operating conditions
 Designed to comply with the operating requirements of EN ISO 23953 - 2:2005
 Performance level M1 (-1°C to + 5°C) in Climate class 3 (25°C, 60%RH,0.2m/s) and
 Performance level M2 (-1°C to + 7°C) in Climate class 4 (30°C, 55%RH,0.2m/s)

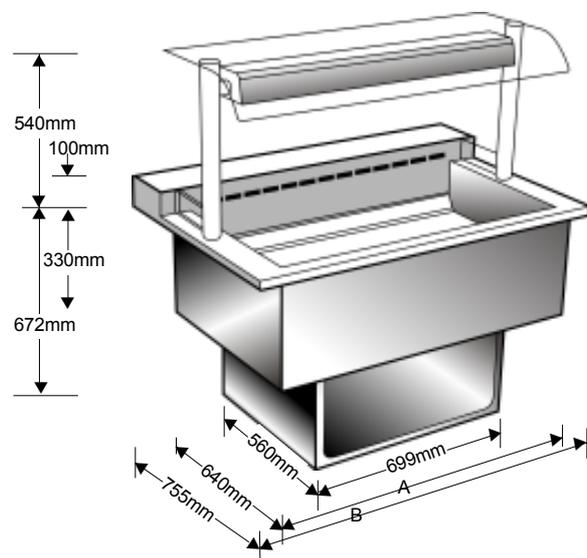

Product	GNI/1 Capacity	Part Number	cut out size (mm)	top size(mm)		power (W)	Approx. weight (kg)
				length	width x height		
Blown Air Deck	2	DRDK 2	725 x 646	708	850 x 755 x 540	1600	75
	3	DRDK 3	1045 x 646	1036	1177 x 755 x 540	1600	100
	4	DRDK 4	1370 x 646	1363	1504 x 755 x 540	2100	125
	5	DRDK 5	1700 x 646	1690	1831 x 755 x 540	2400	150