



Project \_\_\_\_\_  
 AIA # \_\_\_\_\_ SIS # \_\_\_\_\_  
 Item # \_\_\_\_\_ Quantity \_\_\_\_\_ C.S.I. Section 114000

## COMPACT SANDWICH PREP TABLES

with Flat Cover/Self-Contained  
 UST 60" Wide Models



2 Drawer Model Shown



Models listed to the applicable UL, CSA and NSF standards by an approved NRTL. Consult the factory or unit data plate for additional information.

### STANDARD PRODUCT FEATURES

- High Quality Stainless Steel Exterior Top, Sides & Drawers
- Durable, Corrosion Resistant Anodized Aluminum Interior
- Provides NSF7 Performance, Even When Using 6" Deep Pans
- Standard Work Height 34 $\frac{3}{8}$ " on 4" casters
- Environmentally Friendly, Low GWP R-290 Refrigerant
- Top Cut-Outs Accommodate 1/6 Size Pans (divider bars and 4" deep plastic 1/6 size pans provided)
- Top Rails & Drawers Accommodate 6" Deep Pans
- Reinforced Pan Ledge (holds pans securely level)
- Reversible, Full Length White Nylon Cutting Board
- Stainless Steel Insulated Pan Lid with (2) Open Positions
- Automatic Non-Electric Condensate Evaporator
- Full-Length Drawer Handle with Gasket Guard
- EZ-Clean™ Drawer Gasket(s)
- Self-Closing Drawers with Stay Open Feature
- Heavy-Gauge Stainless Steel Drawer with Slide
- Interior Mounted Thermometer
- 8' Cord & Plug Attached
- Set of (6) 4" Casters

### ACCESSORIES & OPTIONS (\*field installed)

- CK21 (six 6" (15.2 cm) high casters for 60" models)
- CK25 (six 3 $\frac{1}{2}$ " (8.9 cm) high casters for 60" models)
- CK27 (six 2 $\frac{1}{2}$ " (6.4 cm) high casters for 60" models)
- LK6 (six 6" (15.2 cm) high legs for 60" models)
- Optional accessory kits shipped separately for field installation

### AVAILABLE CONFIGURATIONS

#### 60" Wide Four Drawer Models

| Model      | Model Type                                                                       |
|------------|----------------------------------------------------------------------------------|
| UST6012-DD | 60" Wide, 12 Pans on Top Rail / 9 Pans in Top Drawers / 6 Pans in Bottom Drawers |
| UST6024-DD | 60" Wide, 24 Pans on Top Rail / 9 Pans in Top Drawers / 6 Pans in Bottom Drawers |

### FACTORY INSTALLED OPTIONS

- Stainless Steel Finished Back (model numbers will have '-SB' suffix)

Approved by \_\_\_\_\_ Date \_\_\_\_\_ Approved by \_\_\_\_\_ Date \_\_\_\_\_




# COMPACT SANDWICH PREP TABLES



with Flat Cover/Self-Contained  
UST 60" Wide Models

## MODELS:


UST6012-DD

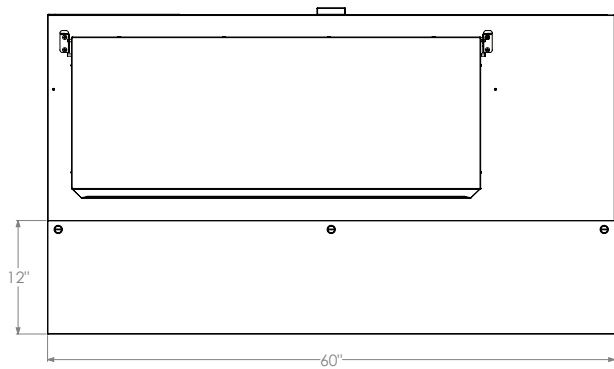

TOP VIEW

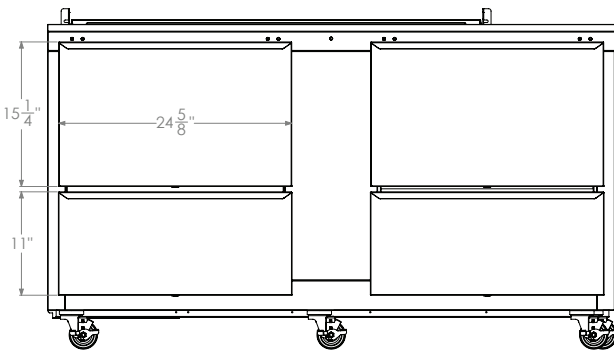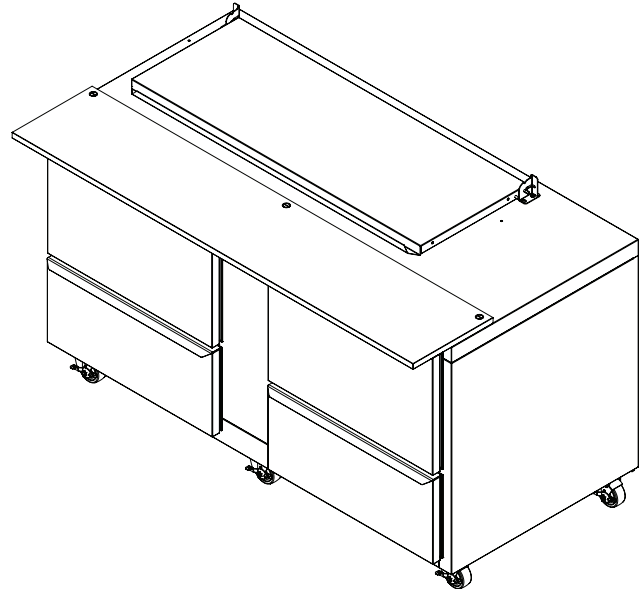

FRONT VIEW

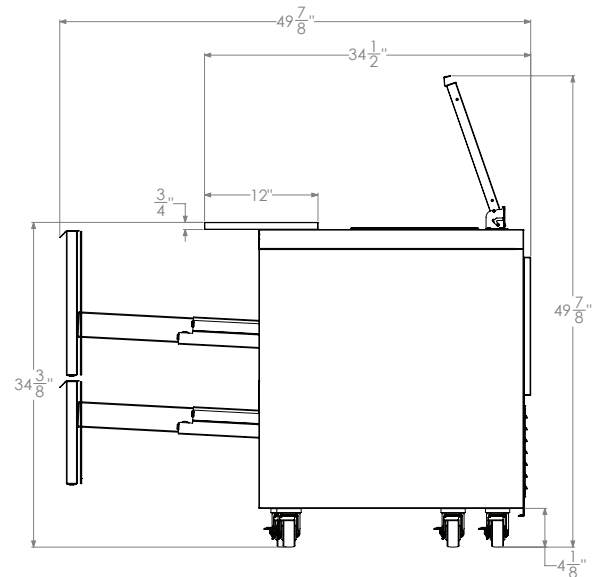

SIDE VIEW

CAD and/or Revit Files Available

<https://traulsen.kclcad.com/>



# COMPACT SANDWICH PREP TABLES

with Flat Cover/Self-Contained  
UST 60" Wide Models

## MODELS

UST6012-DD, UST6024-DD

## EQUIPMENT SPECIFICATIONS

| MODELS                                     | UST6012        |  | UST6024      |  |
|--------------------------------------------|----------------|--|--------------|--|
| DIMENSIONAL DATA                           |                |  |              |  |
| Drawers per cabinet                        | 4              |  |              |  |
| # of 1/6 Size Pan Top                      | 12             |  | 24           |  |
| # of 1/6 Size pans per drawer (top/bottom) | 9/6            |  |              |  |
| # of 1/6 Size pans per unit                | 42             |  | 54           |  |
| Length - overall in.                       | 60 (152.4 cm)  |  |              |  |
| Depth - overall in. <sup>1</sup>           | 34½ (87.6 cm)  |  |              |  |
| Depth - cutting board in.                  | 12 (30.5 cm)   |  | 8 (20.3 cm)  |  |
| Width - drawer in.                         | 24 ⅝ (62.5 cm) |  |              |  |
| Height - overall on 4" casters             | 36 (91.4 cm)   |  |              |  |
| Work Height on 4" casters                  | 34¾ (87.3 cm)  |  |              |  |
| ELECTRICAL DATA (NEMA 5-15P attached)      |                |  |              |  |
| Voltage                                    | 115/60/1       |  |              |  |
| Full Load Amperes                          | 7.2            |  |              |  |
| REFRIGERATION DATA                         |                |  |              |  |
| Refrigerant                                | R-290          |  |              |  |
| Refrigerant Charge oz.                     | 5 (141.8 g)    |  |              |  |
| BTU/HR²   HP                               | 1525   ¼ HP    |  |              |  |
| SHIPPING DATA                              |                |  |              |  |
| Length - crated in.                        | 69 (175.3 cm)  |  |              |  |
| Width - crated in.                         | 42 (106.7 cm)  |  |              |  |
| Height - crated in.                        | 41 (104.1 cm)  |  |              |  |
| Volume - crated cu. ft.                    | 91 (2576.8 l)  |  |              |  |
| Weight - crated lbs.                       | 368 (167 kg)   |  | 351 (159 kg) |  |

### NOTES:

- Overall depth figure includes standard cutting board
- Compressor BTU based on a 90°F ambient and 20°F evaporator

When ordering please specify: Voltage, Hinging, and Options.

Equipped with one NEMA 5-15P Plug 

### CONSTRUCTION, HARDWARE, INSULATION

Cabinet exterior front, one piece sides, pan lid, and drawers are constructed of heavy gauge stainless steel. Cabinet interior is constructed of anodized aluminum.

The exterior cabinet back and bottom are constructed of galvanized steel. The cabinet is insulated with an average of 2" thick high density, non-CFC, foamed in place polyurethane.

A 3/4" thick, full-length, reversible white nylon cutting board is supplied standard.

### PANS & COVER

Each model is supplied standard with its full compliment of 4" deep plastic 1/6 size pans and stainless steel pan dividers. The insulated lift-up pan cover is constructed of stainless steel, and is easily removable for cleaning.

### REFRIGERATION SYSTEM

A balanced, rear mounted, front breathing, self-contained refrigeration system using environmentally-friendly, low GWP R290 refrigerant is provided. It features a capillary tube metering device, air-cooled hermetic compressor, a forced air evaporator coil and a non-electric condensate evaporator. An 8' cord and plug is provided. Standard operating temperature of the refrigerated base is 34 to 38°F (1.1° to 3.3°C).

### CONTROLLER

An electronic digital control is supplied standard. It includes a 3-Digit LED display, and a Fahrenheit or Celsius temperature scale display capability.

### DRAWERS

They are constructed using heavy gauge stainless steel drawer slides and 1-5/16" diameter stainless steel rollers. Gasket profile and material simplify cleaning and increase overall gasket life. Drawers include both a self-closing and stay-open feature.

### WARRANTY

Both a six year parts and labor warranty and a seven year compressor parts warranty (self-contained models only) are provided standard.