

# DROP-IN SEALED WELL ELECTRIC UNIT



**DISW-4-240 Shown**

Item #: \_\_\_\_\_ Qty #: \_\_\_\_\_  
 Model #: \_\_\_\_\_  
 Project #: \_\_\_\_\_

**FEATURES:**

- Fiberglass insulation between each compartment
- 12" x 20" die stamped openings
- Full stainless steel construction inside and out.
- Remote control panel
- Units are supplied with drains for wet or dry application
- Includes 1/2" I.P.S. Drain(s) with Gate Valve

**MATERIAL:**

- TOP:** 18 gauge #304 stainless steel with die stamped pan openings and self rimmed. (12" x 20" opening)
- BODY:** 20 gauge galvanized

**ELECTRICAL:**

- 120V units yield 1100 Watts
- 208V/240V dual voltage units yield 825 Watts at 208V and 1100 Watts at 240V
- Infinite control knobs
- Indicator lights

**Unit to be hard wired in the field. See Below for optional Cords. Please consult the factory for more information.**



Model #	Length	Width	# of Wells	Cut-Out Size W x L	"C" Dimension	Volts	Amps	Watts	Approx. Wt.	Cu. Ft.
DISW-1-120	16-1/2"	24-1/2"	1	23-1/2" x 15-5/8"	15-1/8"	120	9.17	1100	73 lbs.	6
DISW-2-120	30-1/2"	24-1/2"	2	23-1/2" x 29-5/8"	29-1/8"	120	18.33	2200	110 lbs.	6
DISW-3-120	44-1/2"	24-1/2"	3	23-1/2" x 43-5/8"	43-1/8"	120	27.51	3300	135 lbs.	6
DISW-1-240	16-1/2"	24-1/2"	1	23-1/2" x 15-5/8"	15-1/8"	208/240	3.97/4.58	825/1100	73 lbs.	6
DISW-2-240	30-1/2"	24-1/2"	2	23-1/2" x 29-5/8"	29-1/8"	208/240	7.94/9.16	1650/2200	110 lbs.	6
DISW-3-240	44-1/2"	24-1/2"	3	23-1/2" x 43-5/8"	43-1/8"	208/240	11.91/13.74	2475/3300	135 lbs.	18
DISW-4-240	58-1/2"	24-1/2"	4	23-1/2" x 57-5/8"	57-1/8"	208/240	15.88/18.32	3300/4400	180 lbs.	23
DISW-5-240	72-1/2"	24-1/2"	5	23-1/2" x 71-5/8"	71-1/8"	208/240	19.85/22.90	4125/5500	208 lbs.	35
DISW-6-240*	86-1/2"	24-1/2"	6	23-1/2" x 85-5/8"	85-1/8"	208/240	23.82/27.48	4950/6600	275 lbs.	35

\*6-well units include one control panel. Two separate control panels are available upon request.

**NOTE: Units are not designed to cook or heat frozen or refrigerated foods. Food placed in tables should already be hot, and the table will maintain the proper temperatures**

**Optional Accessories:**


Visit our website for additional Accessories

**SU-90**

Automatically fills & maintains water level. For DISW, DISLSW, SW & HDSW Series. Requires Manifold Drain Assembly (Except HDSW series). See below.







**Manifold Drains (Per Well)**  
Add The Suffix **-M** To The Model Number.



**Thermostatic Controls**  
Add The Suffix **-T** To The Model Number.

**Cord with NEMA Plugs**


SU-P-234	8' Cord with <b>NEMA 5-15P</b> plug for 1 well, 120v Units	
SU-P-231	8' Cord with <b>NEMA L5-30P</b> plug for 2 or 3 well, 120v Unit	
SU-P-232	8' Cord with <b>NEMA 6-20P</b> plug for 1, 2, 3 or 6 well (6 well unit requires 2 Cords), 240v Units	
SU-P-233	8' Cord with <b>NEMA L6-30P</b> plug, for 4 or 5 well, 240v Units	

**Adapter Bars**

**SU-45A** 12" x 1" Adapter Bar.

**3-Phase Upgrade**




**SU-72** Upgrade to 240 volt units to 3 Phase Wiring.



# DIMENSIONS and SPECIFICATIONS

TOL ± .125"

ALL DIMENSIONS ARE TYPICAL

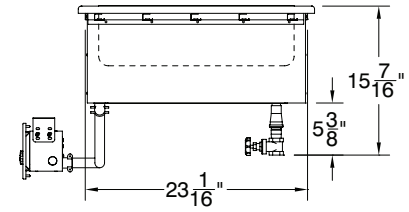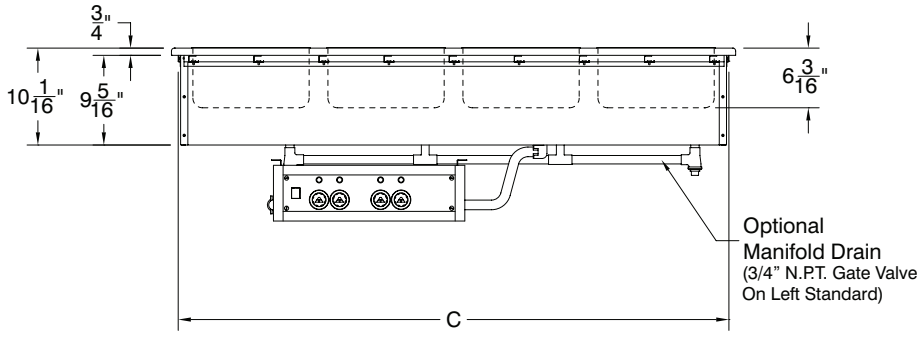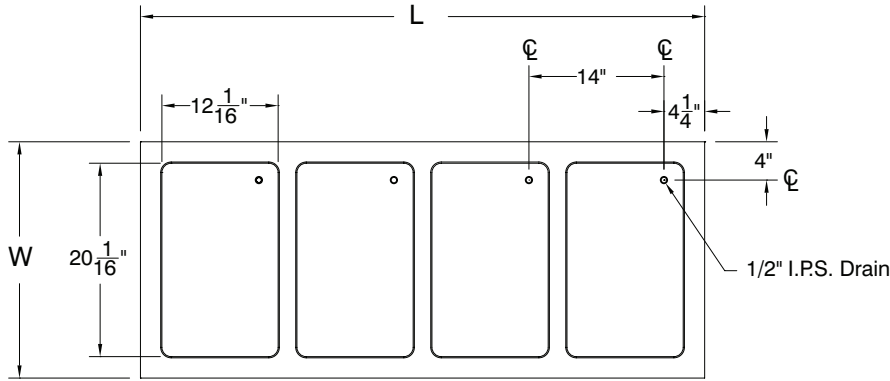

### CONTROL PANEL SPECS

Model #	Cut-Out Size Length (A)	Cut-Out Size Height (B)	Front Panel Length (C)
DISW-1	12-3/8"	4 -1/2"	13-1/2"
DISW-2	12-3/8"	4 -1/2"	13-1/2"
DISW-3	12-3/8"	4 -1/2"	13-1/2"
DISW-4	18-3/4"	4 -1/2"	19-7/8"
DISW-5	18-3/4"	4 -1/2"	19-7/8"
DISW-6*	18-3/4"	4 -1/2"	19-7/8"

*\*6-well units include one control panel.  
Two separate control panels are available upon request.*

**Unit to be hard wired in the field. See Accessories for optional Cords.  
Please consult the factory for more information.**

