



**Catalogue**  
FOOD SERVICE  
**Chapter**  
REFRIGERATION

**Specific model**  
EERM-3 R-290 UK 230V 50/60Hz 1N

19097122

04/05/2023

The photo may show the standard model and not the configured one

**DENOMINATION:**


Refrigerated wall displays ERM series (black plastic covered), with 3 doors, at 50Hz.

**DESCRIPTION :**

- Refrigerated wall displays ERM SERIES (black plastic covered)  
 '- Sanitary epoxy coated galvanised steel inside.  
 - Black plastic covered galvanised steel (black version).  
 - 40 kg/m<sup>3</sup> injected polyurethane insulation.  
 - Copper piping and aluminium flaps evaporator.  
 - Hermetically sealed copper serpentine ventilated compressor.  
 - Double glazed doors with anti-mist protection (low E) with inner air chamber and handle.  
 - Digital display for electronic control of temperature.  
 - ON/OFF power switch.  
 - Top horizontal lightning.  
 - Working temperature: +2 °C, +8 °C (room temperature: 32 °C).  
 - UK plug

**DIMENSIONS**

X Width	1375 mm	X Gross width	1420 mm
Y Depth	565 mm	Y Gross depth	615 mm
Z Height	900 mm	Z Gross height	1055 mm
Net Weight	110,0 kg	Gross Weight	115,0 kg
Net volume	0,700 m <sup>3</sup>	Gross volume	0,921 m <sup>3</sup>



**ELECTRICITY TECHNICAL SPECIFICATIONS**

Amperage (A)	1,65A
Electric frequency	50/60Hz
Electric power	0,285 kW
Voltage	230V - 1N

**GAS TECHNICAL SPECIFICATIONS**

Gas type	R-290
----------	-------

**COLD TECHNICAL SPECIFICATIONS**

Annual elec. consumption	1186,25 kWh
Clasif. Energy efficiency	F
Climate class	4
Cooling gas load	59,000 g
Energy Efficiency Index	79,57 %
Power consumption 24h	3,25 kWh
Refrigeration power	0,369 kW

**CONNECTIONS TECHNICAL SPECIFICATIONS**

Single-phase 230V wiring	2X1,5+T - 4 A
--------------------------	---------------

**OTHERS**

Condensation system	Vent.
Number of doors	3





**Catalogue**  
FOOD SERVICE  
**Chapter**  
REFRIGERATION

**Specific model**  
EERM-3 R-290 UK 230V 50/60Hz 1N

19097122

04/05/2023

The photo may show the standard model and not the configured one

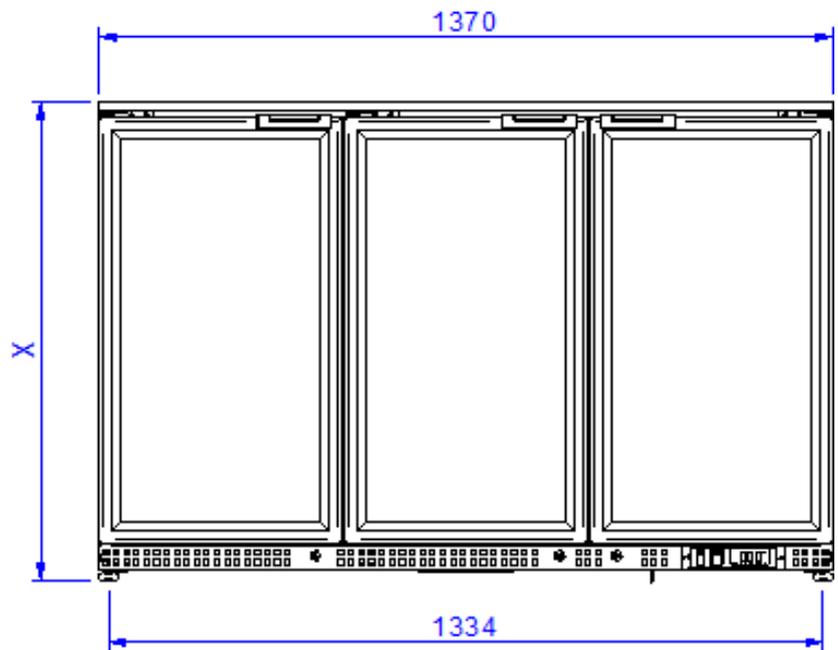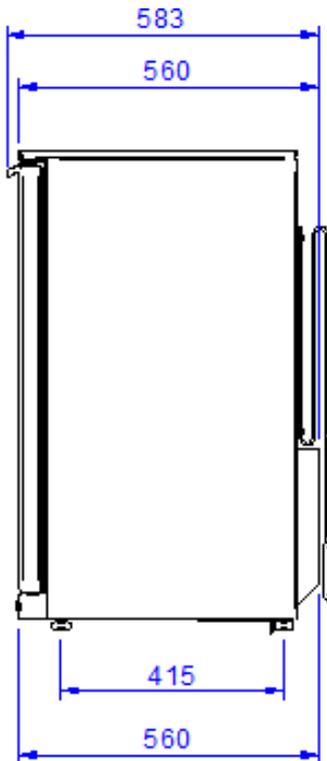

	EERM	EERMU
X	900	800

