



CRYSTAL TIPS

H 36

36 Kg/24h

230V/1N/50Hz
Self contained - Spray System

Fabbricatori di ghiaccio a palette / Paddle Ice Makers:
H23 nano - H23 F - H25 - H25 F - H30 - H30 F - H36 - H36 F - H45 - H45 F - H50 - H50 F - H62 - H62 F - H80 - H80 F - H95 - H95 F - H150
H23 nano F - H23 F - H25 F - H30 F - H36 F - H45 F - H50 F - H62 F - H80 F - H95 F - H150 F



- USB
- BLUETOOTH
- TOUCH CONTROL
- OPTIONAL RAINBOW TECHNOLOGY
- SAFE ICE
- OPTIONAL OZONE
- APP REMOTE CONTROL

CARATTERISTICHE

- Scocca in acciaio
- Condensazione ad aria o acqua
- Ciclo di lavaggio
- Produzione ghiaccio programmabile
- Tasto comandi capacitivo
- Segnalazione acustica e luminosa allarmi
- Report allarmi HACCP
- Regolazione livello ghiaccio depositato
- Collegamento USB per aggiornamento sw e scarico dati HACCP
- Ventilatore condensatore controllato alle basse temperature ambiente
- Analisi predittiva malfunzionamenti
- Report prestazioni apparecchiatura.

OPZIONALE

- Ciclo sanificazione programmabile con Ozono Trattamento nanotecnologico evaporatore con Rainbow technology
- Connessione cloud IOT
- Kit piedini 100 mm

FEATURES

- Stainless steel construction
- Air or water condensation
- Cleaning cycle
- Programmable ice production
- Touch control
- Acoustic and luminous alarms
- Report HACCP alarms
- Storage bin ice level adjustment
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Predictive analysis of malfunctions
- Machine performance report.

OPTIONAL


- Ozone sanitization cycle programmable
- Rainbow technology : Nanotechnological evaporator treatment
- IOT cloud connection
- Feet 100 mm kit

DATI TECNICI / SPECIFICATIONS

			cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	kg	kg
H36	A	220-240/50/1		585	230	10	17.8	3.75	36	42
H36	W	220-240/50/1		585	200	10	10.3	37.2	37	43



TIPO GHIACCIO / ICE TYPE

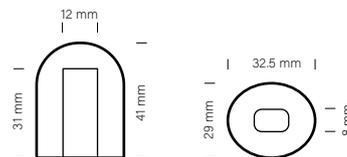

PCS / CYCLE
PZ/CICLO **20**

WEIGHT ICE
PESO GHIACCIO **21 g**

PRODUZIONE GHIACCIO /
ICE PRODUCTION **kg/24h
lbs/24h**

Raffreddamento ad Aria
Air Cooled Unit



Temp. Aria Air Temp.	Temp. Acqua / Water Temp.			
	32° 90°	21° 70°	15° 60°	10° 50°
10°	29	32	35	36
50°	64	71	77	79
21°	27	29	32	33
70°	60	64	71	73
32°	23	25	26	27
90°	51	55	57	60
38°	21	23	24	25
100°	46	51	53	55

Raffreddamento ad Acqua
Water Cooled Unit



Temp. Aria Air Temp.	Temp. Acqua / Water Temp.			
	32° 90°	21° 70°	15° 60°	10° 50°
10°	30	34	35	36
50°	66	75	77	79
21°	29	33	34	35
70°	64	73	75	77
32°	28	32	33	34
90°	62	71	73	75
38°	26	29	30	31
100°	57	64	66	68

CAPACITÀ DEPOSITO / BIN CAPACITY

12 kg **571 pcs**

DIMENSIONI / DIMENSIONS

L x P x H (mm)
450 x 545 x 690


510 x 600 x 850

VOLTAGE

**220-240/50/1
220/60/1**

GAS

**R290
GWP=3
Ton CO2 equiv. Air = 0.0 Ton
CO2 equiv. Water = 0.0**



CRYSTAL TIPS

H 36

36 Kg/24h


230V/1N/50Hz
Self contained - Spray System

Fabbricatori di ghiaccio a palette / Paddle Ice Makers:
H23 nano - H23 - H25 - H30 - H36 - H45 - H50 - H62 - H80 - H95 - H150
H23 nano F - H23 F - H25 F - H30 F - H36 F - H45 F - H50 F - H62 F - H80 F - H95 F - H150 F




DIMENSIONI / DIMENSIONS



Vista frontale
Front view

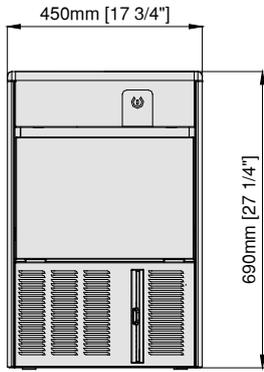

Vista laterale
Lateral view

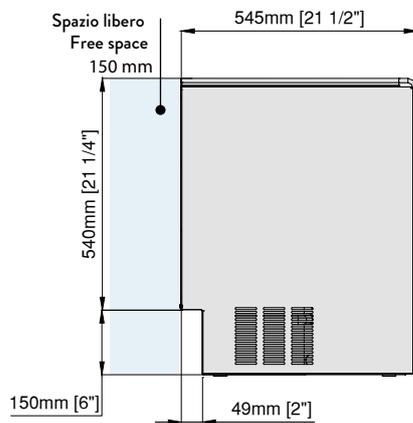

Vista superiore
Top view

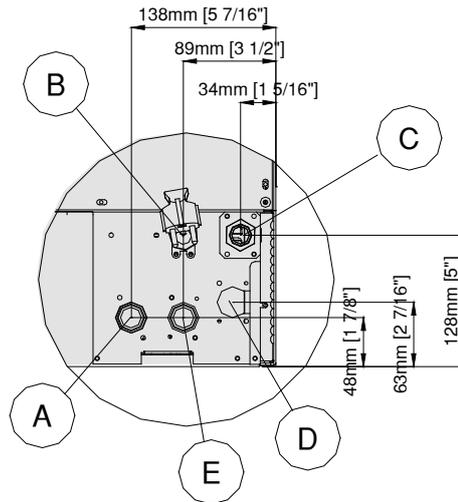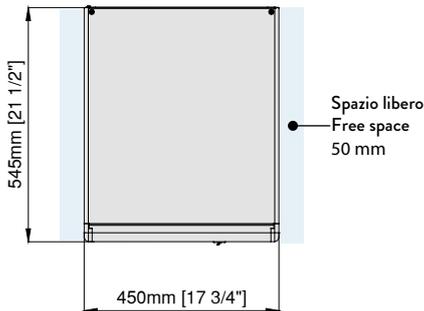

Entrata acqua condensatore ad acqua - 3/4" gas OPTIONAL
Water inlet connection water condensation



Ingresso alimentazione elettrica
Electrical cable supply




Attacco scarico acqua Ø20 mm
Water outlet connection



Uscita acqua condensatore ad acqua Ø 20 mm / Water outlet connection water condensation



Attacco entrata acqua - 3/4" gas / Water inlet connection



Schuko plug
Spina schuko



Kit 4 Feet
Kit 4 piedini
Ø50mm H100-120 mm
(optional)

TOUCH CONTROL



Capacitive Stand-by Reset button
(led with continuous colors variation from white to red)

Pulsante Capacitivo di ripristino dello stand-by (led a variazione continua di colori dal bianco al rosso)

CONDIZIONI OPERATIVE - OPERATING REQUIREMENTS

	Min.	Max
Temp. Ambiente / Air Temperature	10°C	40°C
Temp. Acqua / Water Temperature	5°C	35°C
Press. Acqua / Water Pressure	1 Bar (14psi)	5 Bar (70psi)
Conducibilità acqua / Water conductivity	>10 °S	
Alimentazione / Electrical supply	-10%	+10%

Calore espulso / Rejected Heat	807 W
Volume Aria / Air Volume	300 m3/h