



DISHWASHER SRC-1800I 400/50/3N (LEFT HAND ENTRY)

67/100 baskets per hour (up to 1.800 plates/hour)



1302419



WARE WASHING
RACK CONVEYOR DISHWASHERS

SALES DESCRIPTION

Compact model for reduced space areas.
2 speed.

FEATURES AND BENEFITS

- ✓ Fully stainless steel jacket.
- ✓ Stainless steel central rack feed system.
- ✓ Process cycles are divided by rubber curtains.
- ✓ Automatic cycle start.

Economy

- ✓ Energy saving rinse supply switch.
- ✓ Pressure controller in the rinse section to limit consumption.
- ✓ Programmed automatic stops if there is no loading.
- ✓ Stop and freezing of timer when the limit switch actuates.

Cleaning and maintenance

- ✓ Wide pivoting door allowing access for cleaning or inspection purpose.
- ✓ Detachable arms and dispersers for easier cleaning.
- ✓ Sloped removable stainless steel filters.
- ✓ Easy boiler emptying by loosening a hose.
- ✓ Failures are easily detected thanks to the warning lights.
- ✓ Easy to repair without moving the machine.

Washing

- ✓ Stainless steel wash arms and deep-drawn dispersers.
- ✓ Efficient and durable wash arm dispersers.
- ✓ Powerful, self-draining vertical wash pump.
- ✓ Easy to install detergent dosifier intake in washing tank. Rinsing
- ✓ Stainless steel rinse arms and powerful, stainless steel, deep-drawn dispersers.
- ✓ Automatic boiler filling with no failure risk for heating elements.
- ✓ Temperature control with high precision probes.
- ✓ Visualisation and adjustment of washing and rinsing temperatures in the digital display by pressing a button.
- ✓ Easy to install rinse aid dispenser intake in boiler.

ACCESSORIES

- Drying units
- Manual water softeners
- Automatic water softeners
- 500 x 500 mm. baskets
- Inserts, supplements & similar
- Loading table for corner situation for rack conveyor dishwashers
- Central sorting tables
- Single exit tables
- Roller conveyor and corner roller conveyor
- Machined curve
- EV Extraction hood with motor
- CV Extraction hood with steam condensation
- Drying unit for corner situation
- CA Extraction hood for SRC-1800



www.sammic.co.uk

Food Service Equipment Manufacturer

Unit 2, Trevanah Road
Troon Industrial Park
LE4 9LS - Leicester

uksales@sammic.com
Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved

product sheet
updated 13/12/2019



DISHWASHER SRC-1800I 400/50/3N (LEFT HAND ENTRY)

67/100 baskets per hour (up to 1.800 plates/hour)



1302419

SPECIFICATIONS

Production

- ✓ Production baskets/hour: 67 / 100
- ✓ Production plates/hour: 1206 / 1800

Wash

- ✓ Temperature: 55 °C - 65 °C
- ✓ Wash tank capacity: 80 l
- ✓ Pump: 2 Hp / 1500 W
- ✓ Wash heating element: 7500 W

Rinse

- ✓ Temperature: 80 °C - 90 °C
- ✓ Water consumption: 270 l/h
- ✓ Rinse heating element: 18000 W
- ✓ Boiler capacity: 20 l

Drag

- ✓ Drag motor power: 0.25 Hp / 180 W

Loading

- ✓ Total installed power: 27140 W

Electrical supply: 400 V / 50 Hz /3N ~(40 A)

External dimensions (WxDxH)

- ✓ Width: 1180 mm
- ✓ Depth: 829 mm
- ✓ Height: 1430 mm

Net weight: 200 Kg

Water Intake: 3/4 "



Drain diameter: 1 1/2 "

Noise level (1m.): 71 dB(A)

Crated dimensions

950 x 1250 x 1700 mm

Gross weight: 240 Kg.

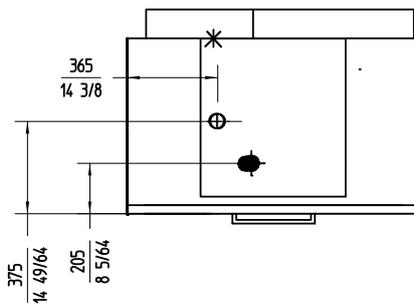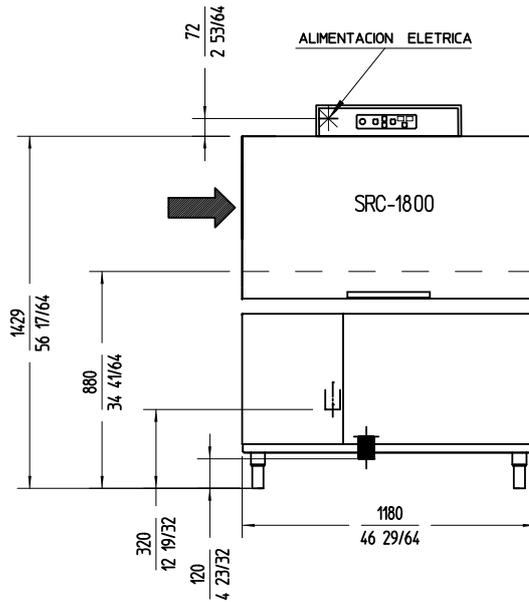

WARE WASHING
RACK CONVEYOR DISHWASHERS



www.sammic.co.uk
Food Service Equipment Manufacturer
 Unit 2, Trevanah Road
 Troon Industrial Park
 LE4 9LS - Leicester
 uksales@sammic.com
 Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

product sheet
updated 13/12/2019